


**NOTES:**

- 1. CABLE: UL 20276 30AWG\*7P+30AWG\*1P+30AWG\*3C+AL/MY+D+B OD=7.3±0.20mm JACKET COLOR: BLACK  
CABLE MUST PRINT: E\*\*\*\*\* AWM 20276 80°C 30V VW-1
- 2. CONNECTOR:  
P1&P2: DVI (24+1)P/M, GOLD PLATED CONTACTS, NICKEL PLATED SHELL
- 3. HOOD: MOLDED TYPE, ABS, COLOR: BLACK.
- 4. THUMB SCREW: #4-40 UNC, MOLDED TYPE, PVC 45P, COLOR: BLACK
- 5. FERRITE CORE: MOLDED BLACK PVC.
- 6. ELECTRICAL TEST:

- (1) 100% OPEN SHORT & MIS WIRE TEST.
- (2) CONTACT RESISTANCE 3 ohm Max .
- (3) INSULATION RESISTANCE 10M ohm Min .
- (4) HI-POT TEST: DC 300V/10ms

ASSMANN WSW P/N	LENGTH
AK-320101-020-S	2.0 M
AK-320101-030-S	3.0 M
AK-320101-050-S	5.0 M
AK-320101-100-S	10.0 M

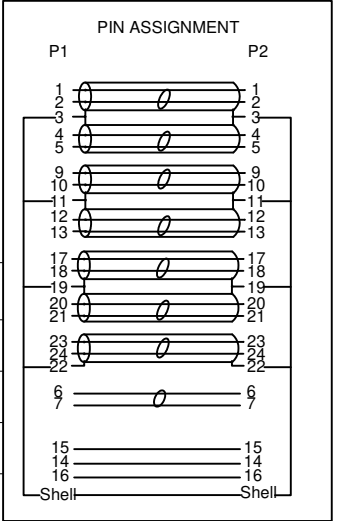

**RoHS compliant**  
**Unit:mm**

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	02.07.2009	Rale
X.	±X				Approved	16.06.2014	Joanna
X.X	±X						
X.XX	±X						
DIM	TOL	②	Update drawing	16.06.2014	Joanna	ASSMANN WSW-No. AK-320101-xxx-S	
X.°	±X°					Drawing-No.	ASS 3626 CA rev02
X.X°	±X°	①	Drawn	02.07.2009	Rale	Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name		

