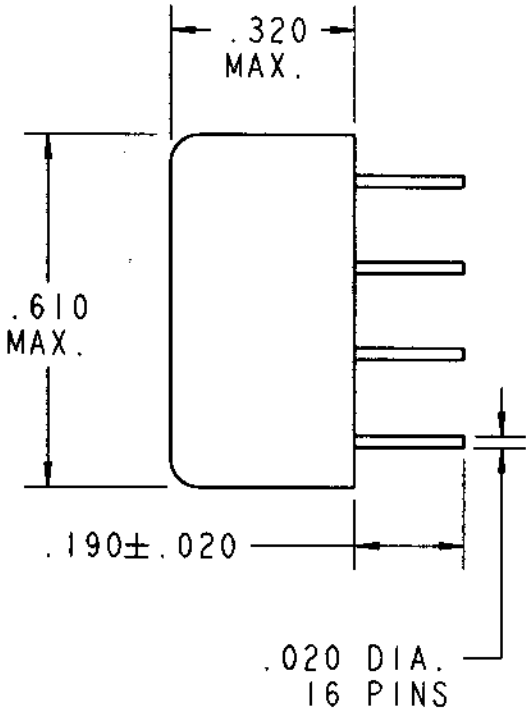

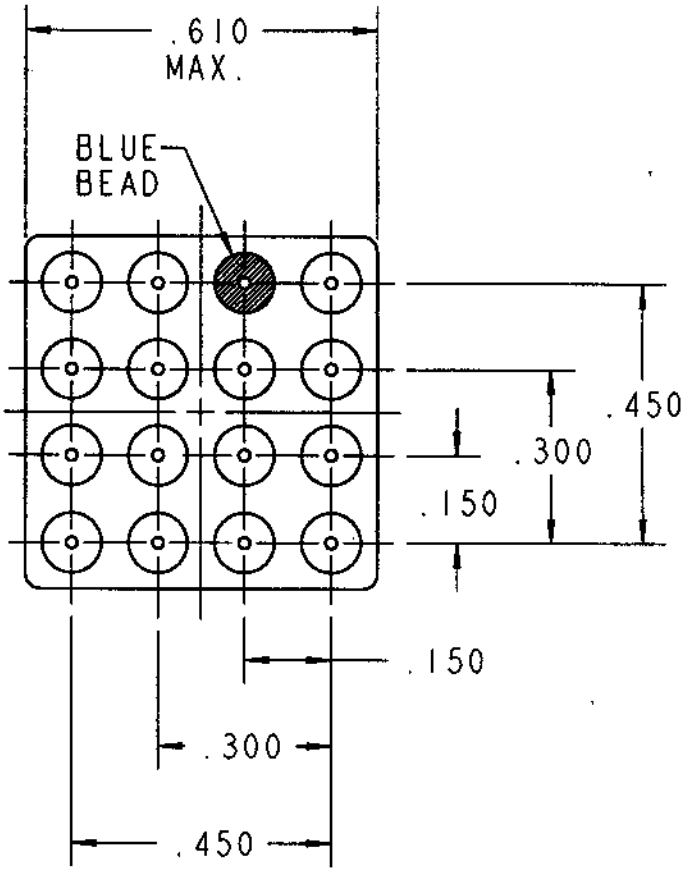

REV. 0
DCO 64170

COIL: @ 25°C

SET	RESET
975 OHMS ±10%	975 OHMS ±10%
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE
13.5 VDC MUST OPERATE	13.5 VDC MUST OPERATE

ENVIRONMENT:

VIBRATION 55 Hz 3000 Hz 30 g's

SHOCK 150 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET/RESET 4 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET

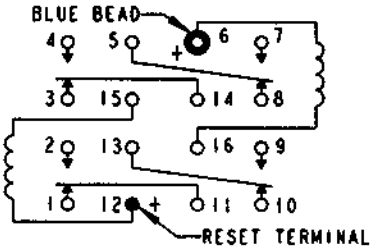

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. B.D. 10/31/01 CK. 10/31/01

CII Technologies
advanced control electronic solutions

CUST. CII STD.
CUST. NO.

TYPE "3SBM" RELAY

3SBM5004V2

F-119 REV 4