


P	LTR	DESCRIPTION	DATE	DWN	APVD
D		DESIGN IMPROVEMENT IN NEW MOLD	13AUG2020	DV	PS
E		REVISED AS PER PCN: E-20-012263	12OCT2021	SCB	SS
E1		DIM "A" TOL AND CURVATURE MAX DIM ADDED.	30DEC2021	SS	PS

$5.08^{+0.05}_{-0.10}$ TYP
 1.00 ± 0.02 TYP
 $2.54^{+0.05}_{-0.10}$ TYP




1. MATERIALS AND FINISH:
 HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94-V0, COLOR GREEN.
 TERMINAL: COPPER ALLOY, TIN PLATED.

- SUITABLE FOR 1.6-2.4mm PC BOARD THK.
- ELECTRICAL
 RATED VOLTAGE : 300 V
 RATED CURRENT : 12 A
 CONTACT RESISTANCE : < 15 mΩ
 INSULATION RESISTANCE: > 1000 MΩ (500V DC)
- OPERATING TEMPERATURE RANGE: -40°C TO +110°C
- P/N FROM 284065-4 TO 2-284065-5 ARE OBTAINED BY ASSEMBLING DIFFERENT MONOLITHIC MODULES CHOSEN AMONG: 284065-2 AND 284065-3, IN ORDER TO REALIZE THE DESIRED NO. OF WAYS.

6. MODULES AND KEYS TE BE GLUED IN PLACE.
 7. NON CUMULATIVE TOLERANCE

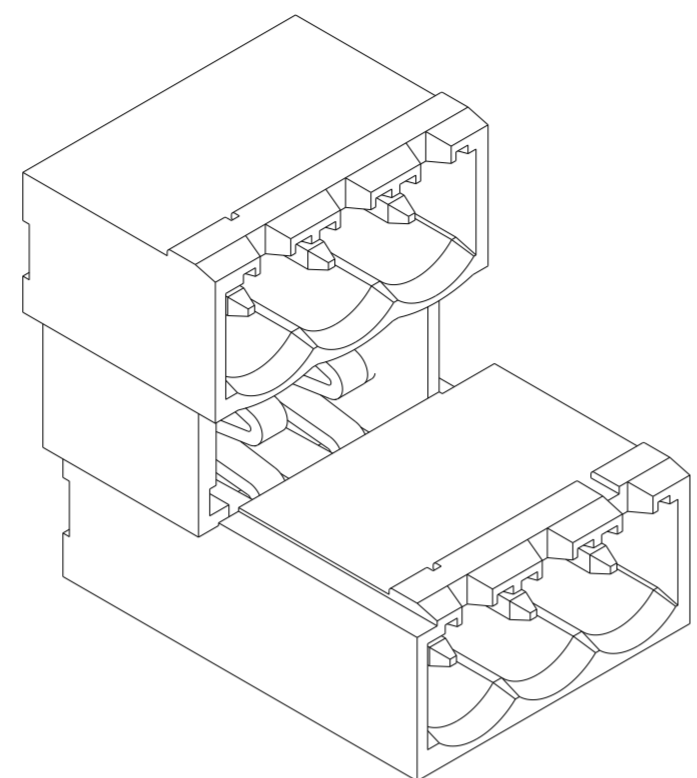


264065-3 AS SHOWN

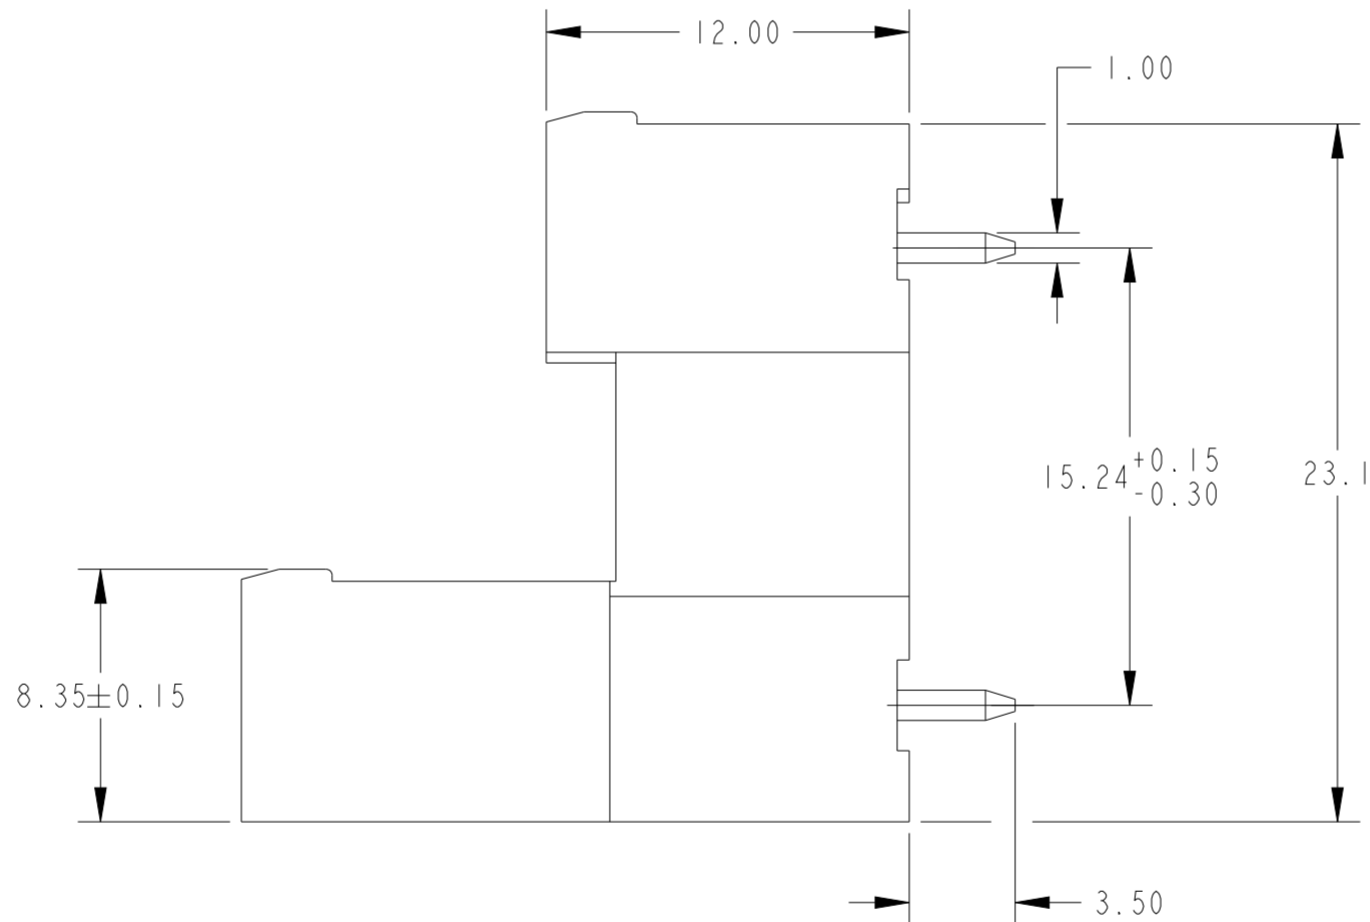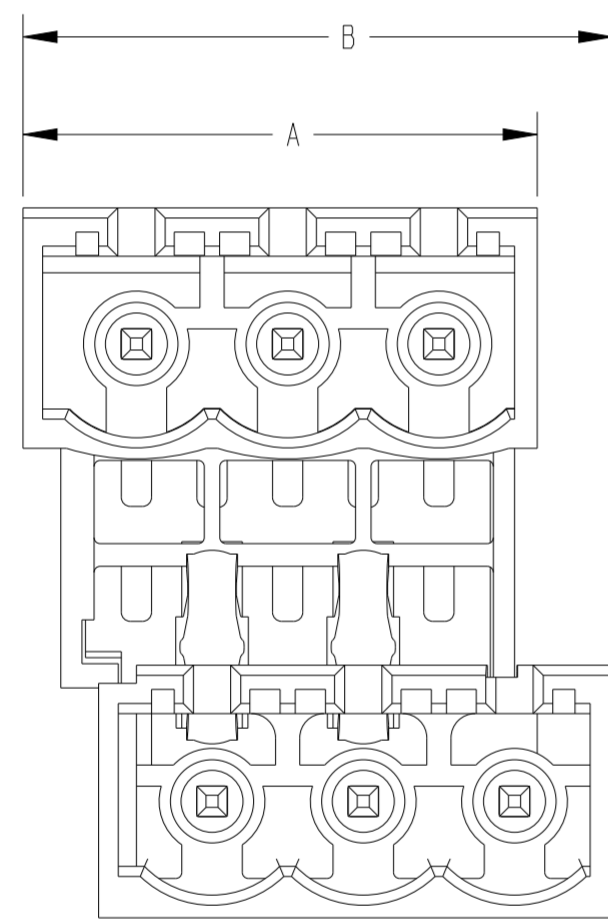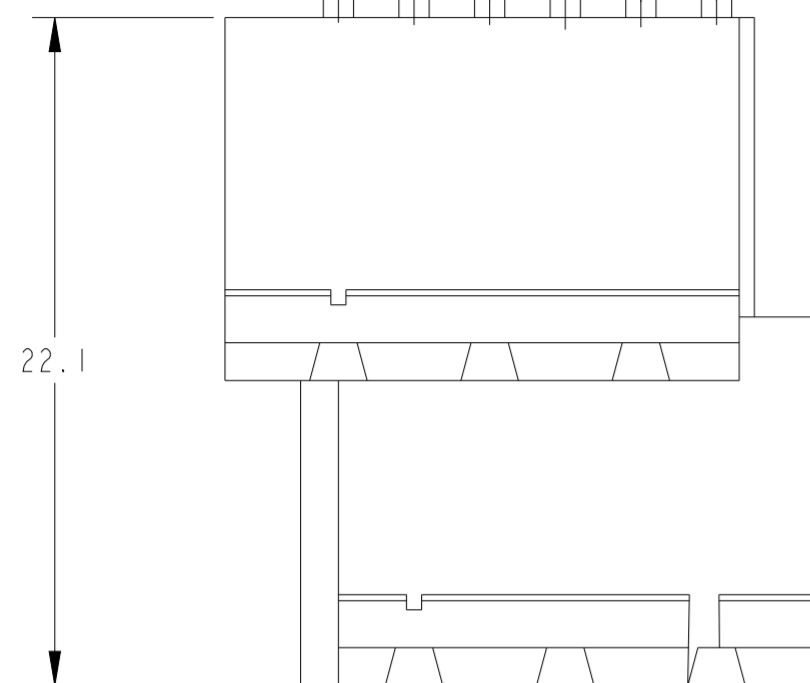

6	0.6	±0.40	108.44	110.94	21	3-284065-3
6	0.4	±0.25	77.96	80.46	15	3-284065-2
6	0.6	±0.40	83.08	85.58	16	3-284065-1
6		±0.50	123.68	126.18	24	3-284065-0
6		±0.40	123.68	126.18	24	2-284065-9
6		±0.40	93.20	95.70	18	2-284065-8
6	0.4	±0.25	83.08	85.58	16	2-284065-7
6		±0.25	62.72	65.22	12	2-284065-6
6	0.6	±0.50	128.80	131.30	25	2-284065-5
6		±0.40	123.68	126.18	24	2-284065-4
6		±0.40	118.64	121.14	23	2-284065-3
6		±0.40	113.56	116.06	22	2-284065-2
6		±0.40	108.44	110.94	21	2-284065-1
6		±0.40	103.40	105.90	20	2-284065-0
6		±0.40	98.32	100.82	19	1-284065-9
6		±0.40	93.20	95.70	18	1-284065-8
6		±0.40	88.16	90.66	17	1-284065-7
6		±0.40	83.08	85.58	16	1-284065-6
6	0.4	±0.25	77.96	80.46	15	1-284065-5
6		±0.25	72.92	75.42	14	1-284065-4
6		±0.25	67.84	70.34	13	1-284065-3
6		±0.25	62.72	65.22	12	1-284065-2
6		±0.25	57.68	60.18	11	1-284065-1
6	0.3	±0.20	52.60	55.10	10	1-284065-0
6		±0.20	47.48	49.98	9	284065-9
6		±0.20	42.44	44.94	8	284065-8
6		±0.20	37.36	39.86	7	284065-7
6		±0.20	32.24	34.74	6	284065-6
6	0.1	±0.15	27.20	29.70	5	284065-5
6		±0.15	22.16	24.66	4	284065-4
6		±0.15	17.00	19.50	3	284065-3
6			12.00	14.50	2	284065-2

RECOMMENDED PC BOARD LAYOUT

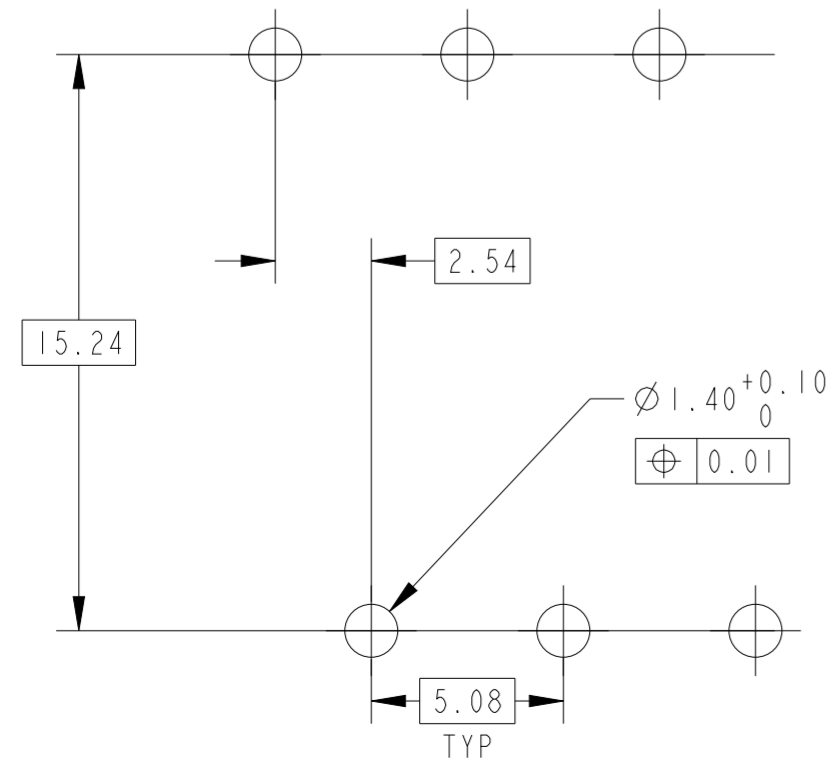


THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	07MAR2008
mm	0 PLC ± 1 PLC ±0.3 2 PLC ±0.25 3 PLC ± 4 PLC ±	CHK	03JUL2008
	ANGLES ±2°	APVD	03JUL2008
MATERIAL	FINISH	PRODUCT SPEC	-
		APPLICATION SPEC	114-20079
		WEIGHT	-
		NAME	TERMINAL BLOCK, MULTIPLE HEADER. 180 DEGREE, CLOSED ENDS, 5.08mm PITCH
		SIZE	A2
		CAGE CODE	00779
		DRAWING NO	C-284065
		RESTRICTED TO	-
CUSTOMER DRAWING		SCALE	5:1
		SHEET	1 OF 4
		REV	E1

TE Connectivity


P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

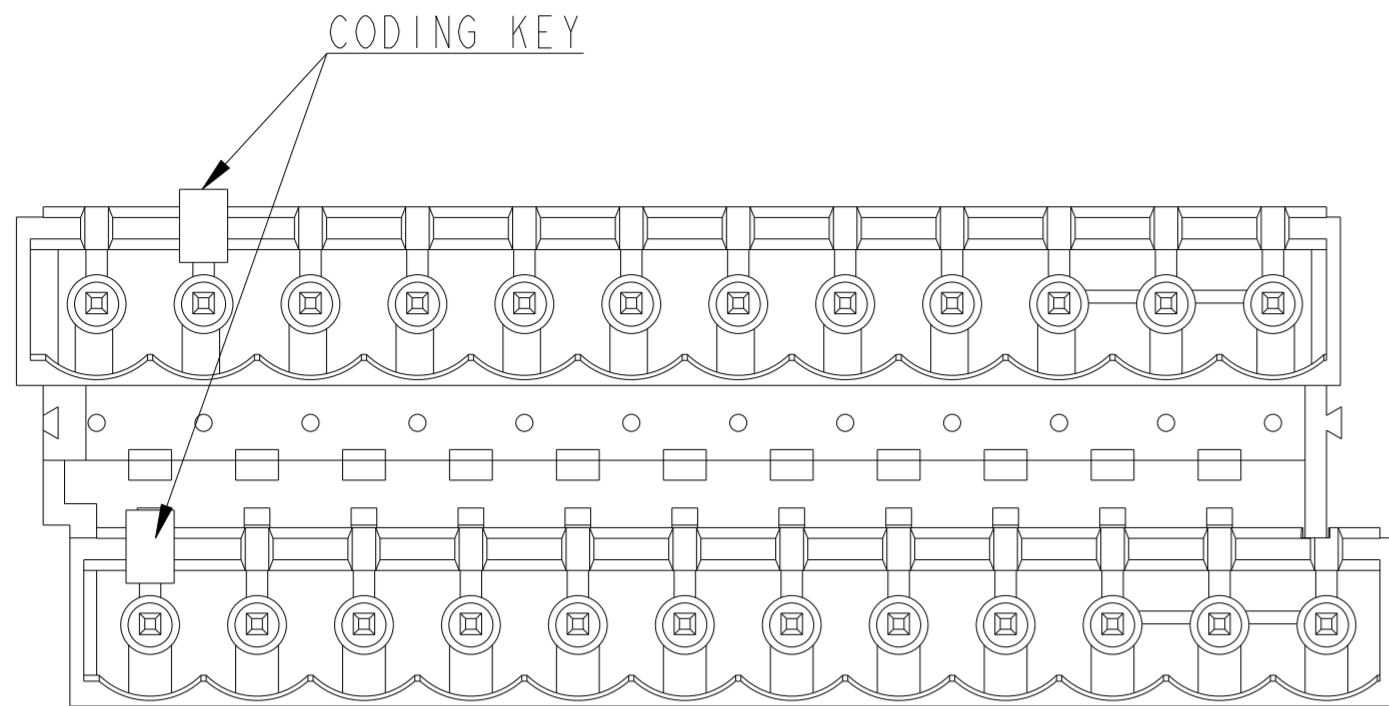


2-284065-6

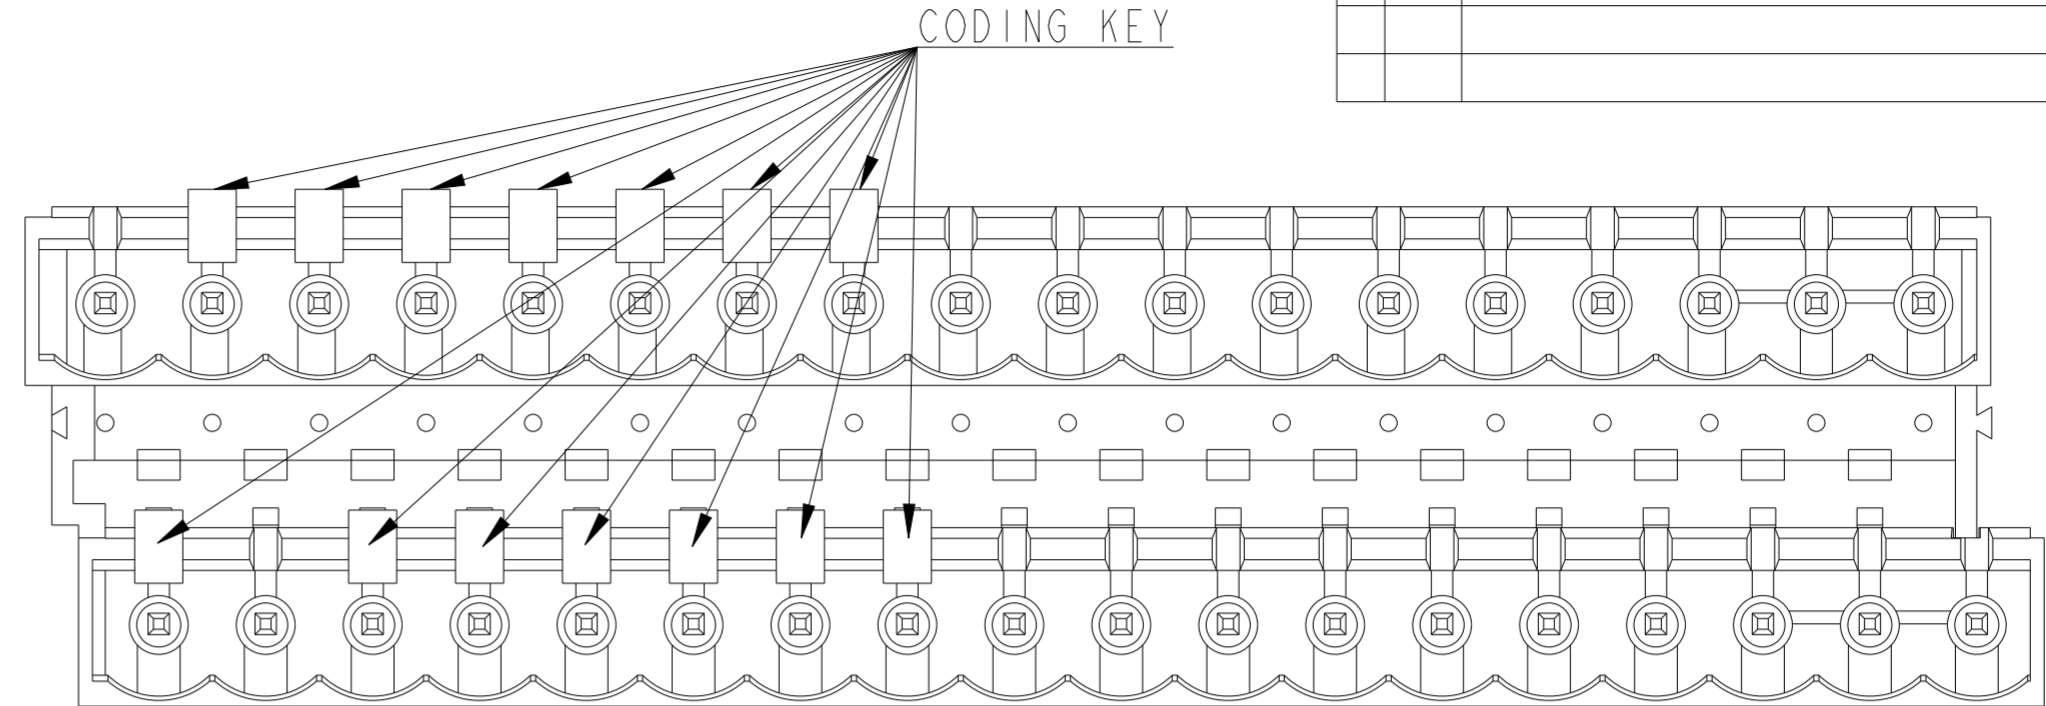


2-284065-9

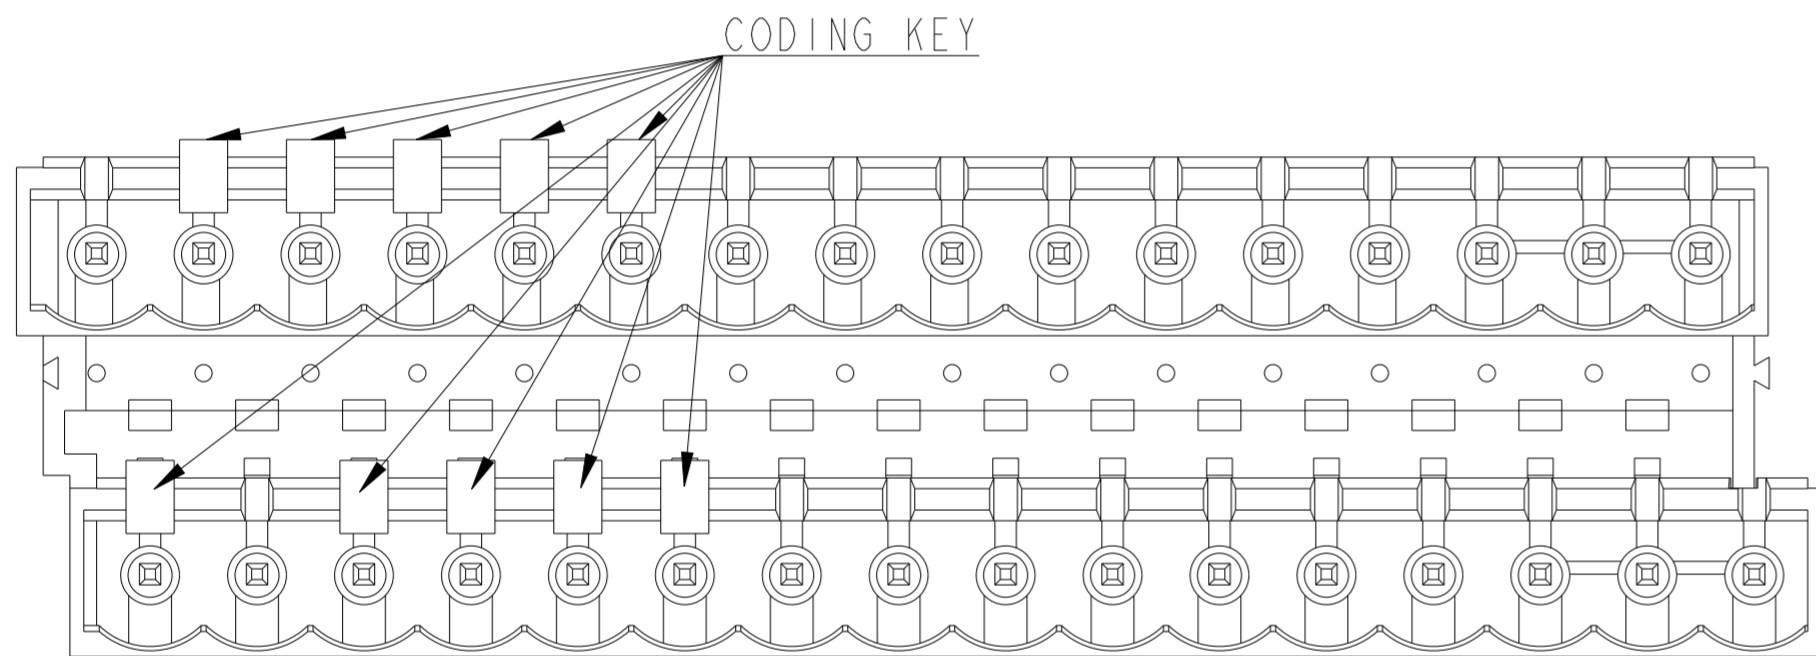

2-284065-7

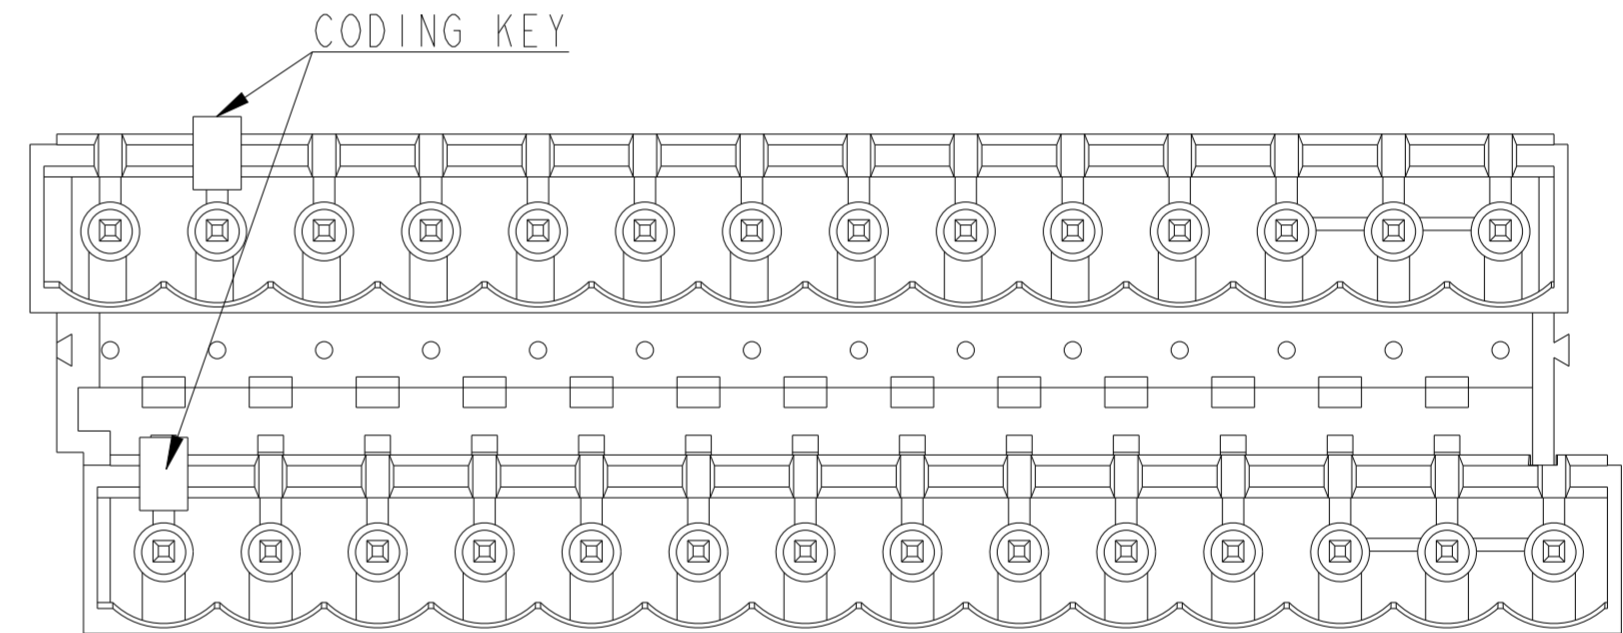


2-284065-8

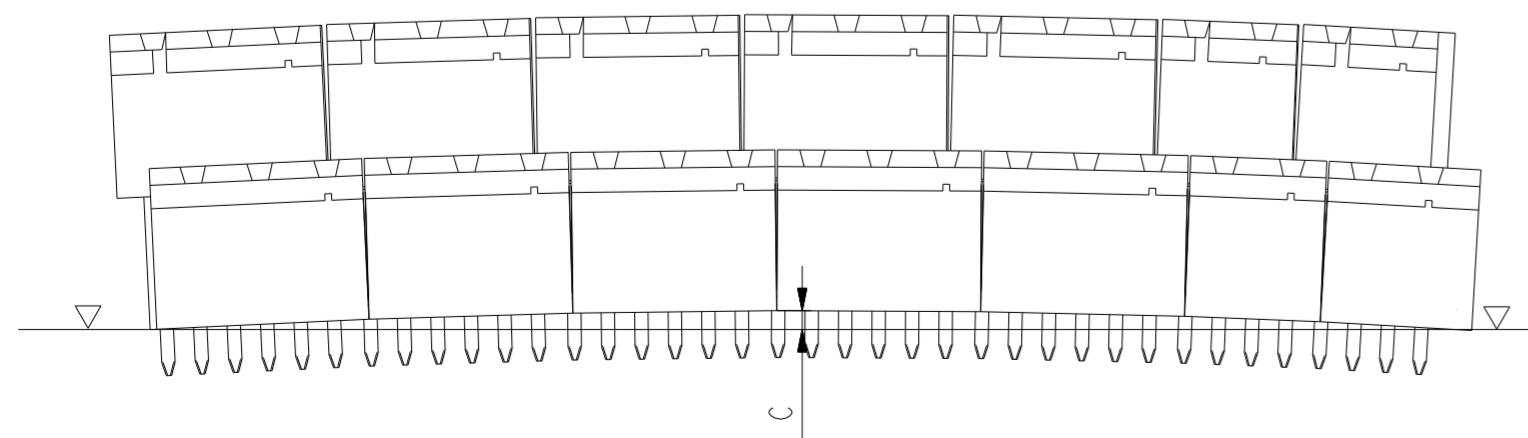


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL 07MAR2008		
DIMENSIONS: mm		CHK C. RICHARD 03JUL2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. RICHARD 03JUL2008	NAME TERMINAL BLOCK, MULTIPLE HEADER. 180 DEGREE, CLOSED ENDS, 5.08mm PITCH	
0 PLC ± 1 PLC ±0.3 2 PLC ±0.25 3 PLC ± 4 PLC ±		PRODUCT SPEC -	SIZE A2	
MATERIAL		FINISH	CAGE CODE 00779	DRAWING NO C-284065
		ANGLES ±2°	RESTRICTED TO -	
		FINISH	SCALE 5:1	SHEET 2 OF 4
			CUSTOMER DRAWING	REV E1


P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

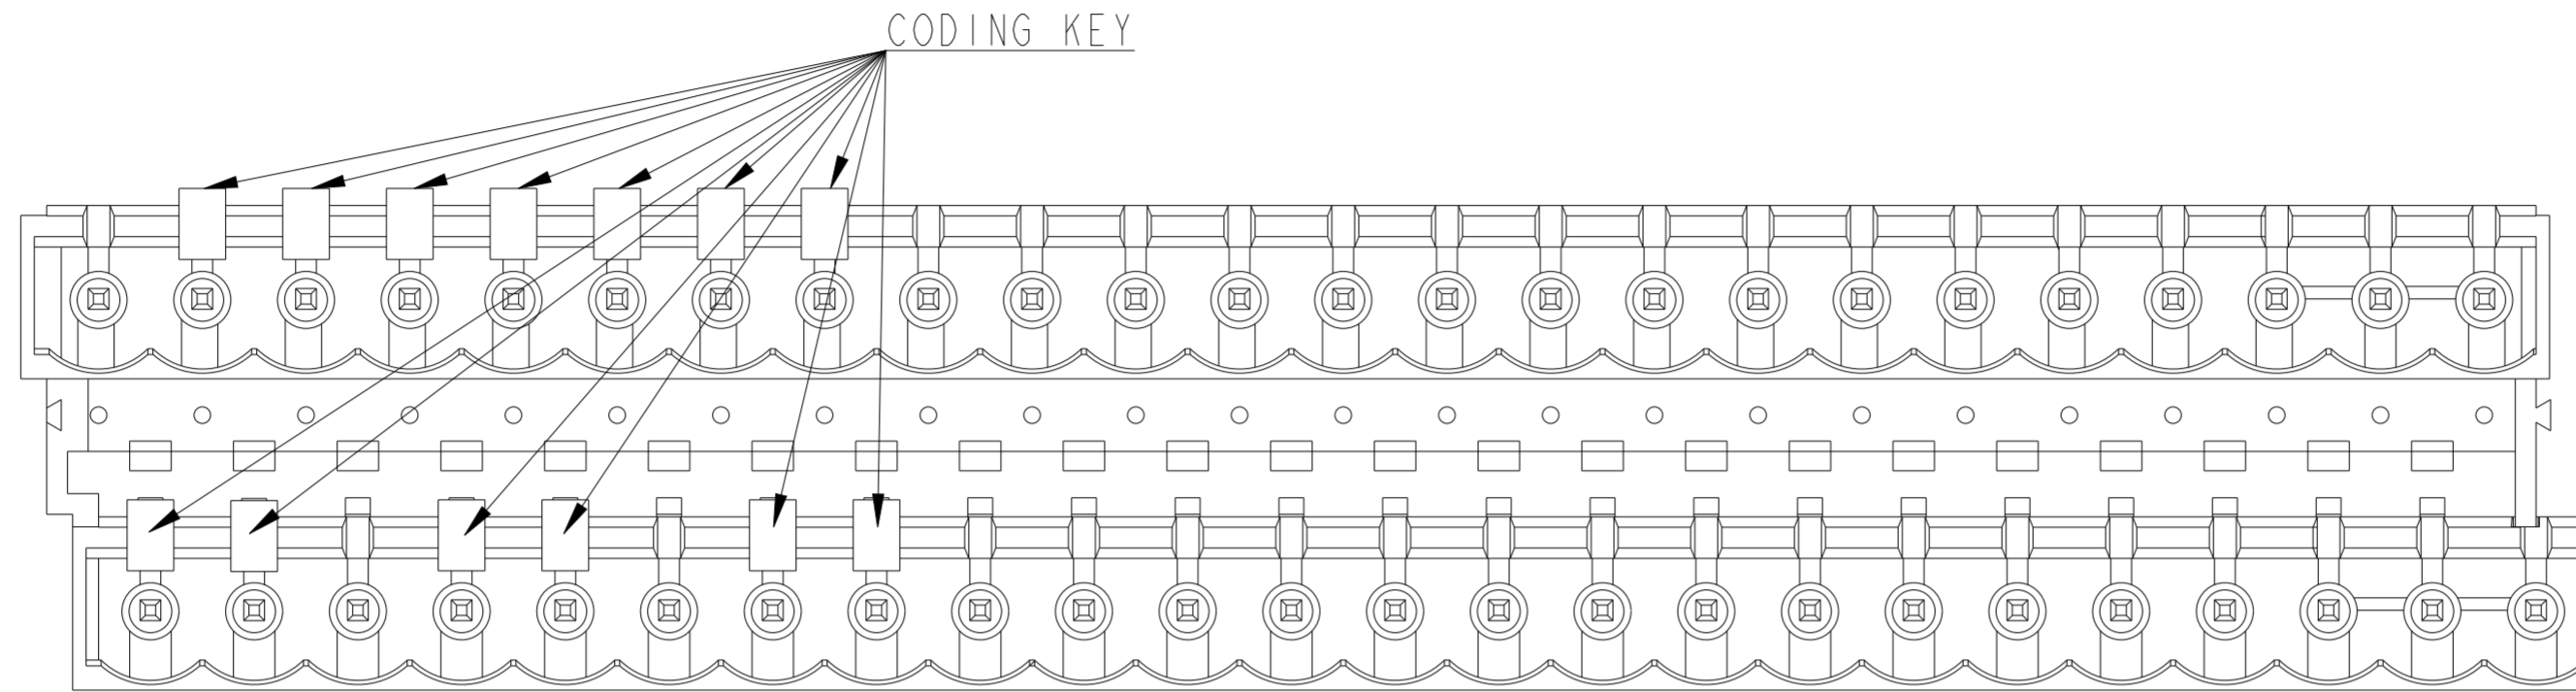


3-284065-0

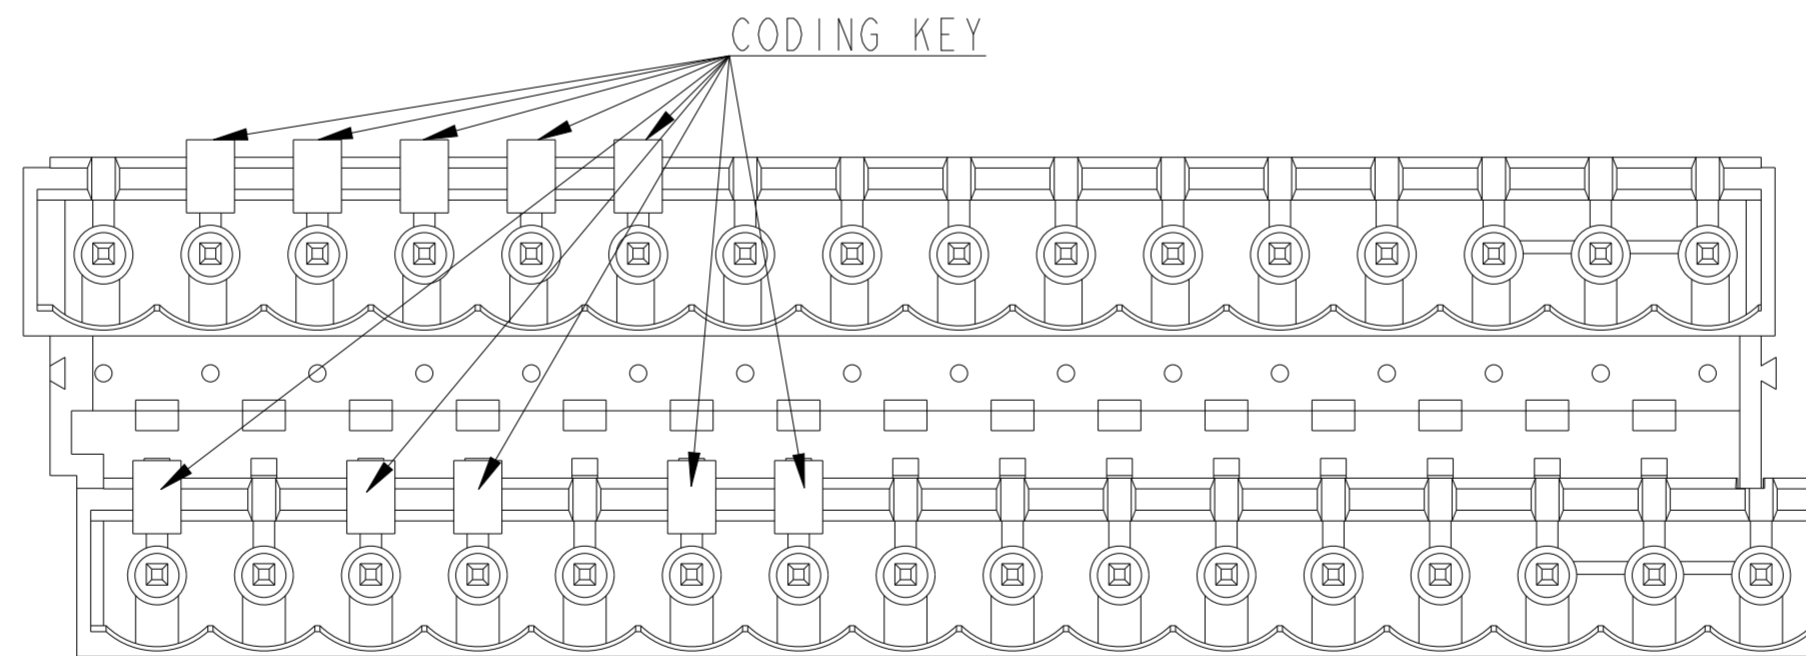


3-284065-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 07MAR2008	 TE Connectivity	
DIMENSIONS: mm		CHK C RICHARD 03JUL2008		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 03JUL2008	NAME TERMINAL BLOCK, MULTIPLE HEADER. 180 DEGREE, CLOSED ENDS, 5.08mm PITCH	
0 PLC ±- 1 PLC ±0.3 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±2° FINISH		PRODUCT SPEC -	SIZE A2	CAGE CODE 00779
MATERIAL		APPLICATION SPEC 114-20079	DRAWING NO C-284065	RESTRICTED TO -
		WEIGHT -	SCALE 5:1	SHEET 3 OF 4
		CUSTOMER DRAWING	REV E1	


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-		SEE SHEET 1	-	-	-

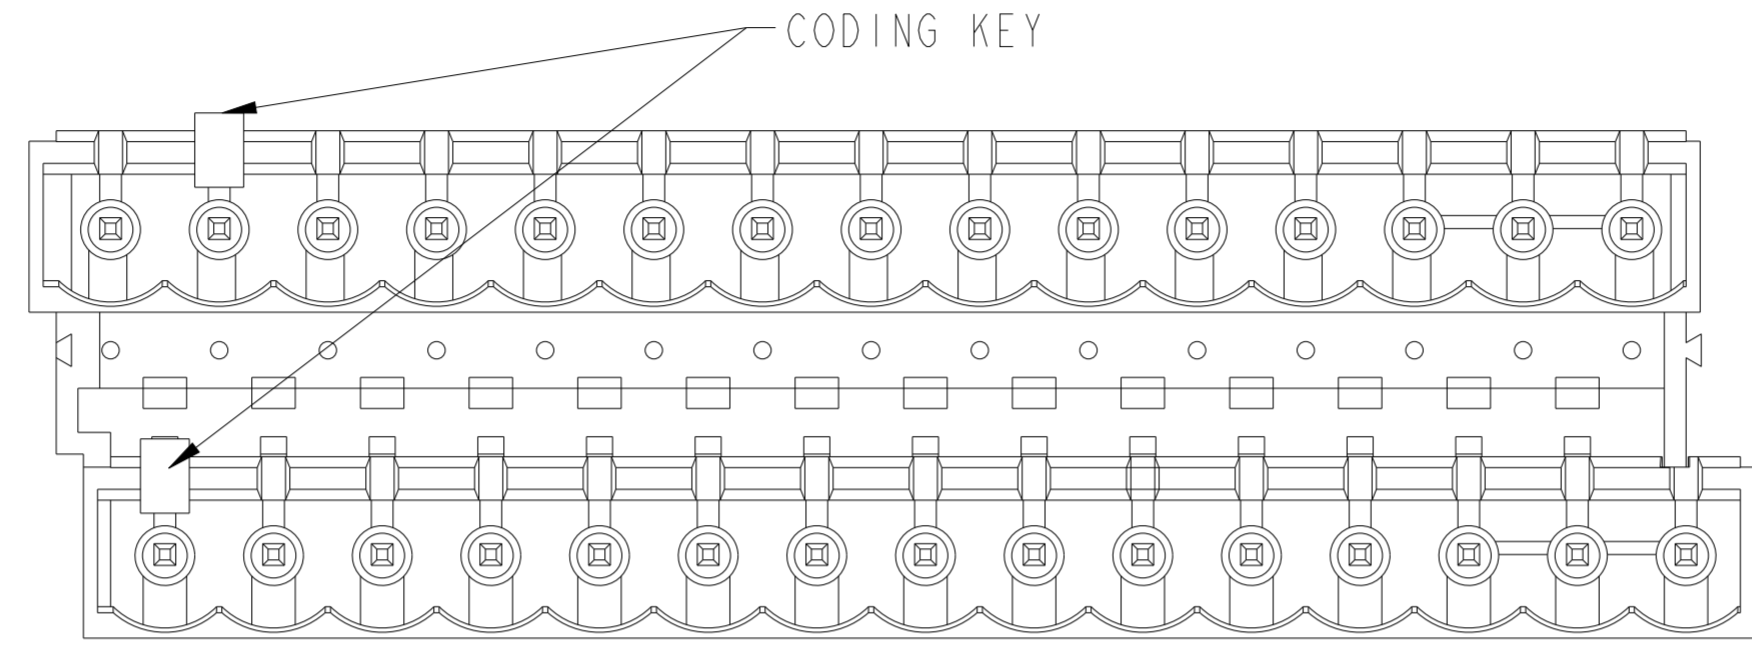

3-284065-2

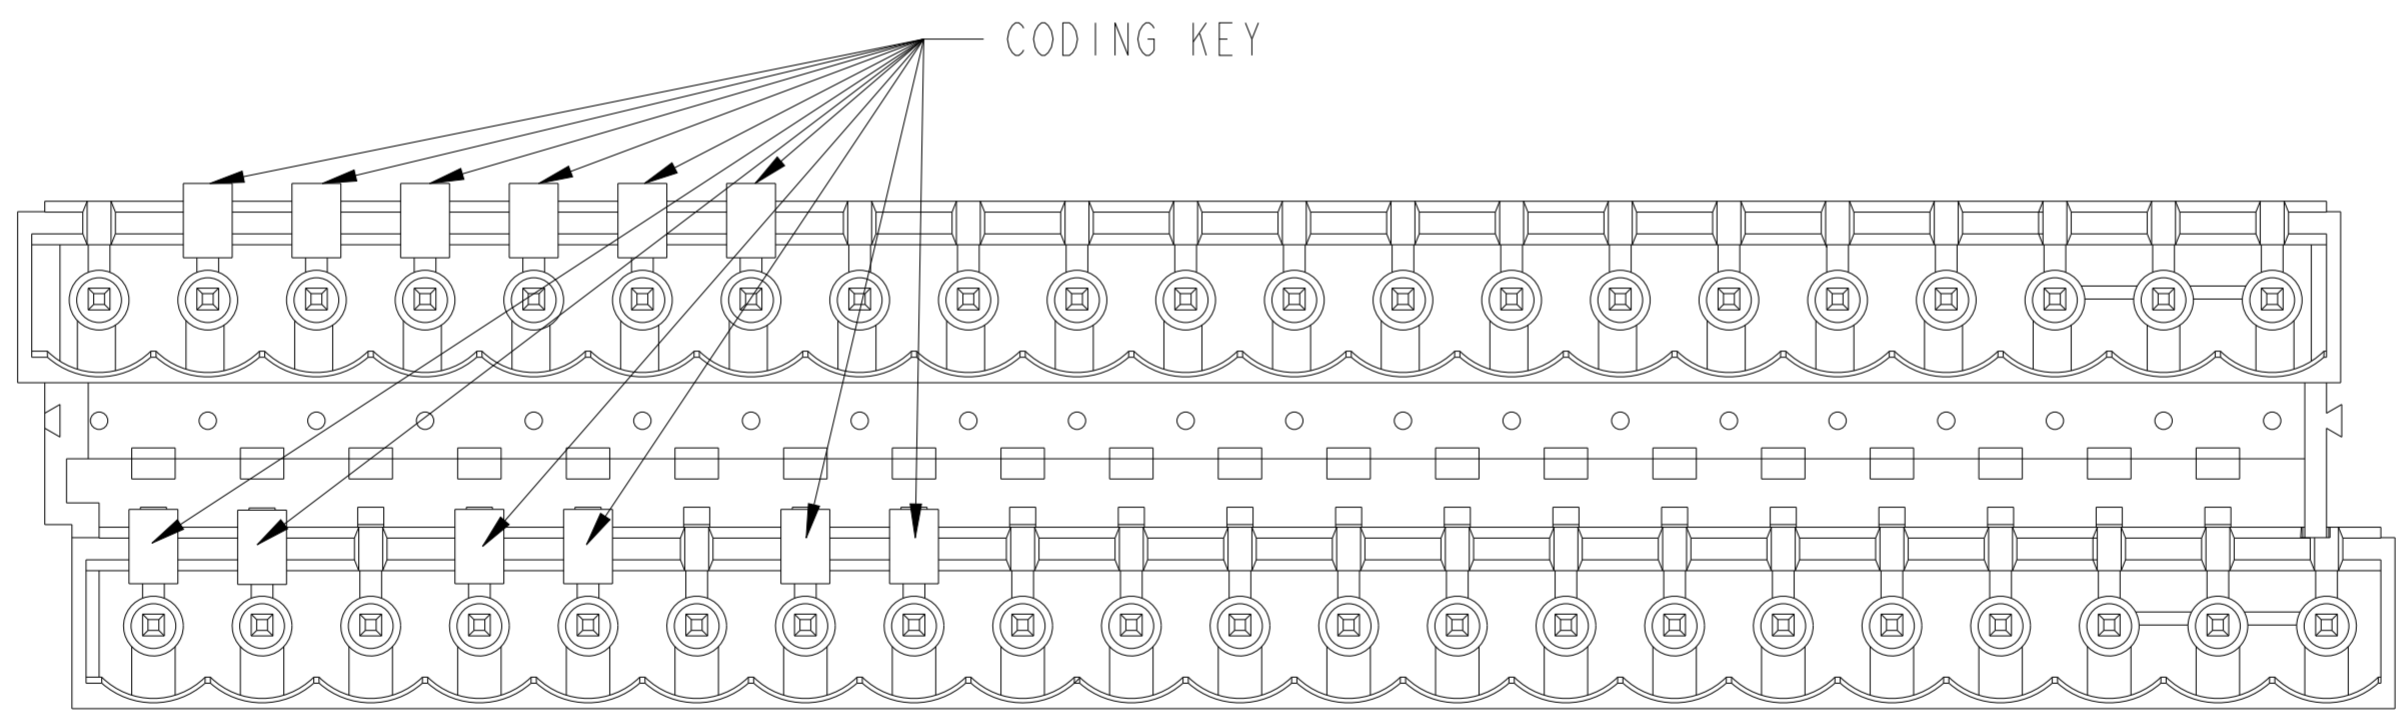

3-284065-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 07MAR2008	 TE Connectivity		
DIMENSIONS: mm		CHK C RICHARD 03JUL2008			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 03JUL2008	NAME TERMINAL BLOCK, MULTIPLE HEADER. 180 DEGREE, CLOSED ENDS, 5.08mm PITCH		
0 PLC ±- 1 PLC ±0.3 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±2° FINISH		PRODUCT SPEC -	SIZE A2	CAGE CODE 00779	DRAWING NO C-284065
MATERIAL		APPLICATION SPEC 114-20079	RESTRICTED TO -	SCALE 5:1	SHEET 4 OF 4
		WEIGHT -	REV E1		
		CUSTOMER DRAWING			