ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00396	Connector, stereo plug, 3.5xL20.5 mm, brass, nickel plated, molding style	1	
2	50-00039	Connector, stereo jack, 3.5x8.0xL24.7 mm, brass, nickel plated, molding style	1	
3	30-01374	Wire, 2C, BC, 28 AWG, 300V, 80C, 4.3 mm, shielded, PVC, nylon braid	1	
4	24-00346	Overmold, audio plug, Ø7.2xL23.3 mm	1	black, PVC
5	24-00036	Overmold, stereo audio jack, Ø11xL45	1	black, PVC

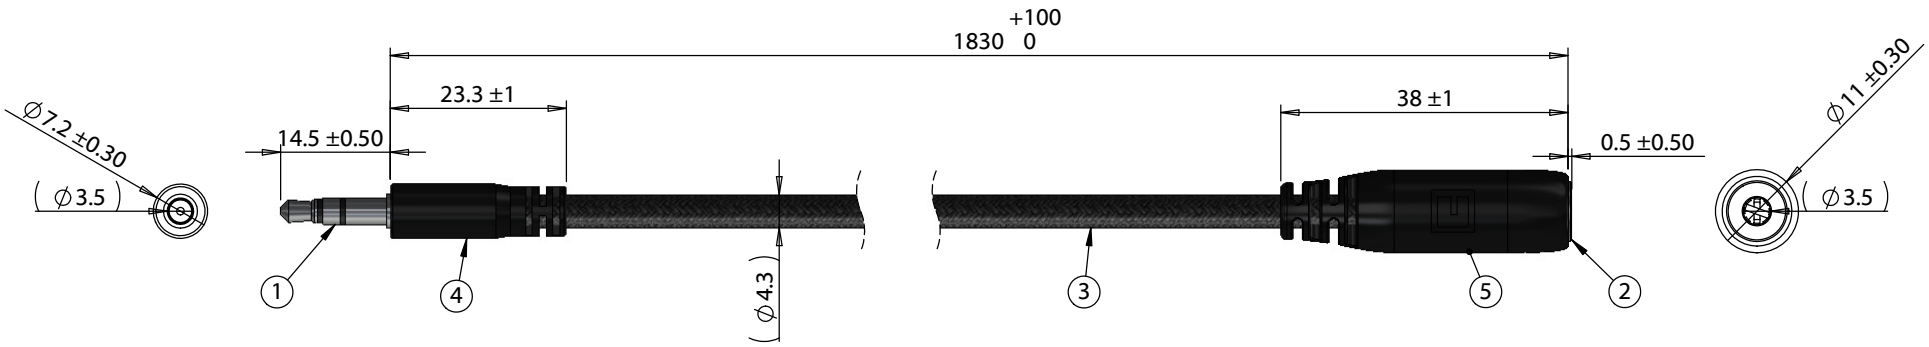





Wiring Diagram

50-00396	wire color	50-00039
A	red	A
B	white	B
C	shield	C

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:
A	8/10/2020	Initial release

Prepared: JC Digitally signed by JC Date: 2020.08.10 14:35:56 -07'00'

Verified: AW Digitally signed by AW Date: 2020.08.10 15:39:37 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 3.5 mm 3C 50-00396 audio plug to 3.5 mm 3C 50-00039 audio jack, 28 AWG, 30-01374

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 10-03720
Scale: 1:1
Sheet 1 of 1

5 4 3 2 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com