
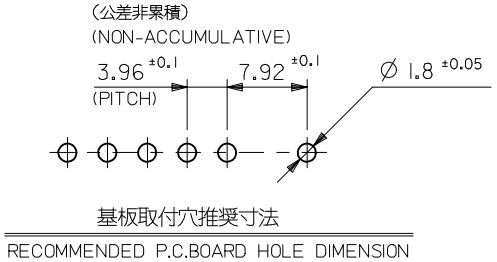
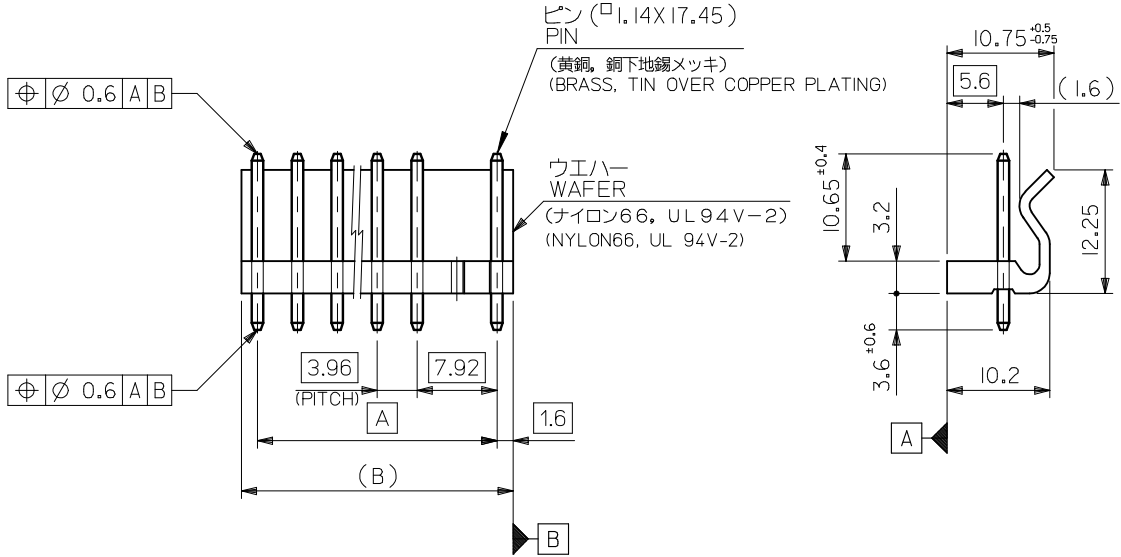


注記  
NOTE

1. ウエハーのそりは、長さ25.4に対して0.24MAX.  
CAMBER MUST BE 0.24 MAX. PER 25.4.

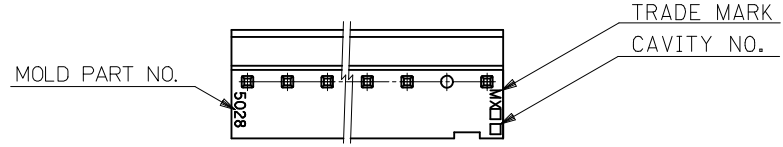

50.72	47.52	09-65-2129	5277-12A	12
42.8	39.6	▲ -2109	▲ -10A	10
38.84	35.64	-2099	-09A	9
34.88	31.68	-2089	-08A	8
30.92	27.72	-2079	-07A	7
26.96	23.76	-2069	-06A	6
23	19.8	-2059	-05A	5
19.04	15.84	-2049	-04A	4
15.08	11.88	▼ -2039	▼ -03A	3
11.12	7.92	09-65-2029	5277-02A	2
B	A	オーダー番号 (EDP NO.) ORDER NO. (EDP NO.)	ENG. NO.	極数 CKTS.

REVISED EC NO: J2016-0865 DRWN: TMIYABE 2016/01/19 CHKD: KASAKAWA 2016/02/18 APPR: KANEKO 2016/03/18	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	± 0.2	DRAWN BY H. HIRAMOTO	DATE '88/09/29	TITLE KK 3.96/7.92 WAFER ASSY WITH LOCK	
	10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '91/06/26	MOLEX INCORPORATED	
	30 OVER	± 0.3	APPROVED BY M. ENOMOTO	DATE '91/06/26	DOCUMENT NO. SD-5277-001	SHEET NO. 1 OF 1
REV	DESCRIPTION	ANGULAR ± 3 °	MATERIAL NO. SEE TABLE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						