


Cable White print  
 ---c AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C  
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

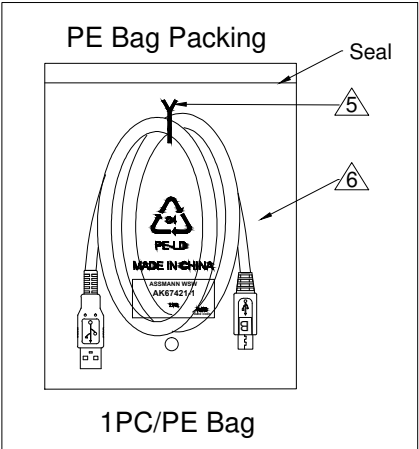

PIN ASSIGNMENT			
P1		P2	
1	Red	1	
2	White	2	
3	Green	3	
5	Black	4	
Shell	Drain+Braid	Shell	

WSW P/N	Jacket color	Length(mm)
AK67421-0.3	Black	300±15
AK67421-0.5	Black	500±15
AK67421-1	Black	1000±20
AK67421-2	Black	2000±20
AK67421-3	Black	3000±30
AK67421-4	Black	4000±40
AK67421-5	Black	5000±50

Electrical test:  
 1. 100% short, open, miss wire test  
 2. Conduct resistance: 2 Ohm max.  
 3. Insulator resistance: 10Mohm min.  
 4. Dielectric test: DC 300V

NO.	NAME.	Q'TY	SPECIFICATION
⑥	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
⑤	TIE	1	Black
④	Out Jacket	NA	Black PVC-45P
③	Cable	1	USB2.0 UL2725 (28#*1P+AL)+28#/2C+AEB Black OD:3.5mm
②	CONN	1	Micro USB 5P B Male Shell:Nickel Pin:G/F Insulator color: Black solder type
①	CONN	1	USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color: White solder type

RoHS compliant  
 Unit: mm

Scale	Free	⑦	Add page 2 for Micro USB B plug	16.02.2022	Luca	Date	Name	Customer-No.
TOLERANCE		⑥	Add a new length	27.01.2022	Luca	Drawn	10.04.2013	Joanna
		⑤	Correct the USB A Male logo	13.12.2019	Winnie	Approved	16.02.2022	Luca
		④	Update	13.07.2018	Xavier			
DIM TOL		③	Add 300mm	20.07.2016	Jesse			
		②	Update drawing	12.04.2016	Amy			
Angle	TOL	Id.	Modification	Date	Name			ASSMANN WSW-No. <b>AK67421-x</b>
								Drawing-No. <b>ASS 7091 CA</b>
						Replace		Sheet 1/2

