


т	۵	п	m	0

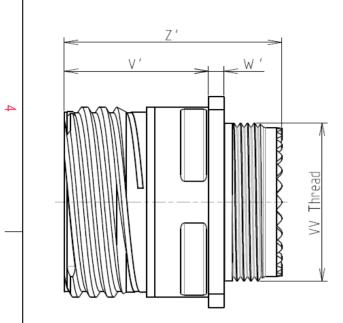

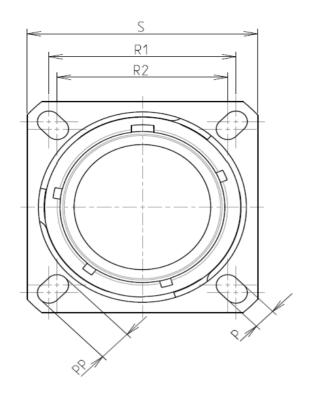



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Composite : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 2000 hours -Salt Spray -Mass : 11.8 g ± 10%

8D 0

G

11

Μ

02

В


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

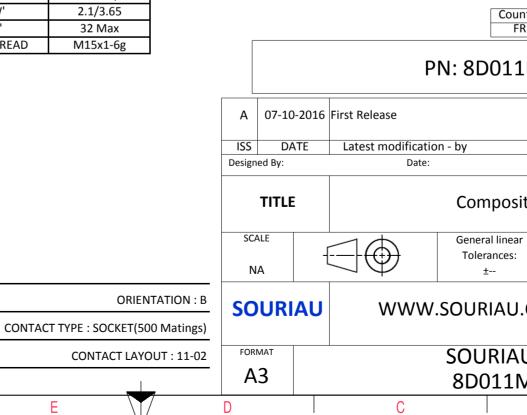

œ		A				
			4			
AS EXAMPLE			3			
any non-conformi s which does not co or of the Parties or ndation, technical r untry Juris FR 1M02BB	omply with by a third party	List	2			
	CUSTOMER D	MOD N° RAWING				
ite Receptacle 8D series						
ar	NPRDS / PROJECT 859					
This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N° M02BB-C		SHEET 1/2				
B		Α				
_		-				

	Ŧ	۵		т	m	D		O	
		Contact Layout						F	Panel Cutou
4	-x .C (2	+Y 					2	QUARE FLANGE RECEPTACLE (TYPE 0)	
	Shell Arrangement size no. 11 -2	tion  X-axis  Y-axis    0  (mm)  (mm)    4  +.095 (2.41)  +.000 (.00)    8 095 (2.41)  +.000 (.00)    Number of  Size  Service	Contact location All				<u> </u>	Dim	ØT_
ယ								ØA ØAA R1 ØT	A
								SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products wh by either of commendat
2								PN: 8	Countr FR D011N
						A ISS Desi		6 First Release Latest modification - by Date:	
_ <b>_</b>							TITLE CALE NA	Gen	eral linear lerances: ±
		-	1				43	8D	URIAU 011M
	Н	G		F	l E	D		С	

