

COIL: @ +25 °C


RESISTANCE	160 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.4 VDC
MUST RELEASE	0.7 VDC

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES:

CUSTOMER DATA SHEET

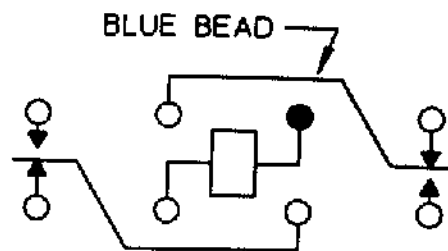

CONTACT RATING: LOW LEVEL TO 5A
28 VDC RESISTIVE 100,000
OPERATIONS MIN.

DR. R.B. 6/11/92 CK. 6/11/92

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO.

TYPE HFWSA RELAY

HFWSA1201G00