

SelecTile ESD™ Mat Kits


Easy-to-Install, Extremely Durable, Static Control Floor Mats

SelecTile ESD™ Mat Kits

Our pre-packaged kits for quick and reliable ESD mats are available with either coin or smooth texture. Kits come complete with tiles, edges, corners and a grounding cord. Made from a durable conductive vinyl composite with 20% recycled content.



2' x 4'

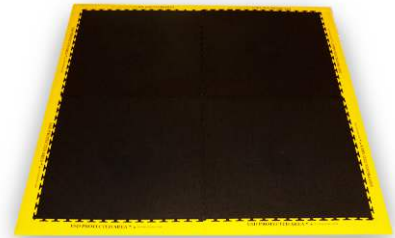

4' x 4'




4' x 6'



4' x 8'

Electrostatic Properties

- Meets the requirements of ANSI/ESD S20.20
- Resistance per ANSI/ESD STM 7.1
 - RTG and RTT - 2.5×10^4 to $< 1.0 \times 10^6$ Ohms
- Walking Voltage Generation per ANSI/ESD STM 97.2
 - < 30 volts

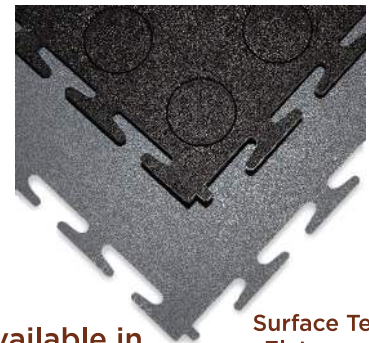

Available in
Black & Gray

Surface Textures
•Flat
•Coin

SelectTile ESD™ Mat Kits

Interlocking Static Control Floor Tiles

Solvent / Stain Resistance

- 5% Acetic Acid
- Acetone
- 28% Ammonia
- Carbon Tetrachloride
- Chloroform
- Cotton Seed Oil
- 95% Ethyl Alcohol
- Ethyl Acetate
- 37% Formaldehyde
- Gasoline
- 30% Hydrogen Peroxide
- Methanol
- Mineral Oil
- 0.5% Muriatic Acid
- 50% Sodium Hydroxide
- 98% Sulfuric Acid
- Tallow
- 2% Tincture of Iodine
- Trichloroethylene

Product Specifications

Dimensions Available:	2' x 4' 4' x 4' 4' x 6' 4' x 8'
Kit Weight:	16 lbs, 29 lbs, 42 lbs, 55 lbs
Thickness:	0.22 Inches
Abrasion Resistance:	<.4 Grams Weight Loss
Smoke Density:	450 or Less
Critical Radiant Flux:	≥ 0.45 Watts/ cm ²
Coefficient of Friction:	0.7 - 0.8 (Depending on Surface)
Recycled Content:	Minimum 20% Post-Industrial Materials