



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THD	Beam Angle	Enclosed Fixture Rated
45 W	120 - 277 V ⚡	> 80	frosted polycarbonate	plastic-coated aluminum	50,000	2.5 KV built-in	-22° - 113°	> 0.9	wet location	< 20%	240°	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-240WW175-UL3	2700K	E26	5,800	128.9 lm / W
GI-CC-240C175-UL3	5000K	E26	5,800	128.9 lm / W

other


Dimensions	Warranty	Weight	Case QTY
5.5" (D) x 9.4" (L)	6 years	1.03 lbs	9 pcs




Features

- ▶ 100% potted drivers- protects electronics against moisture and vibration
- ▶ 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- ▶ Shatterproof
- ▶ Waterproof design for weather-exposed applications
- ▶ Frosted lens design for open fixtures

Luminous Intensity Distribution

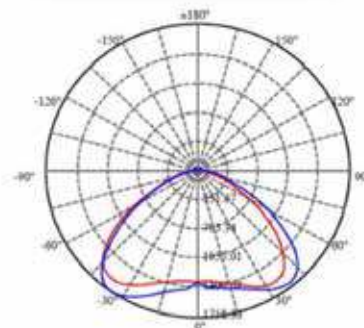

Lux vs Distance

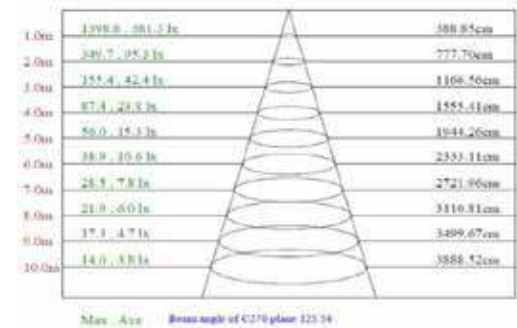

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

