
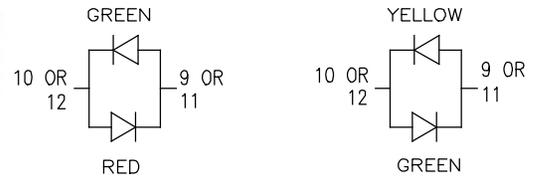
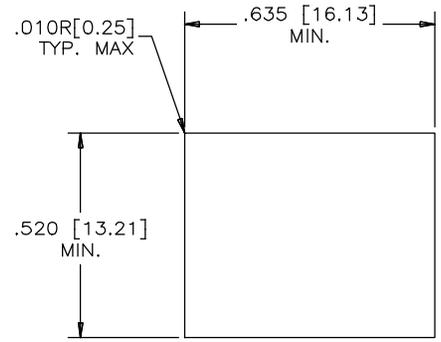
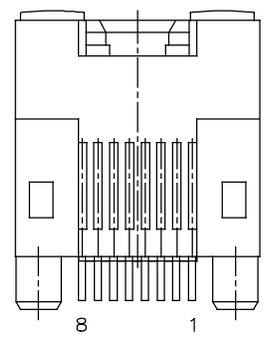
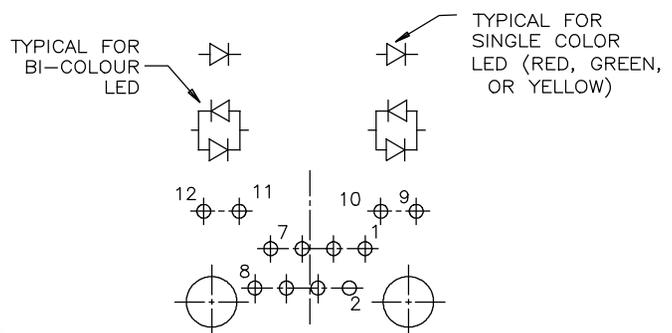
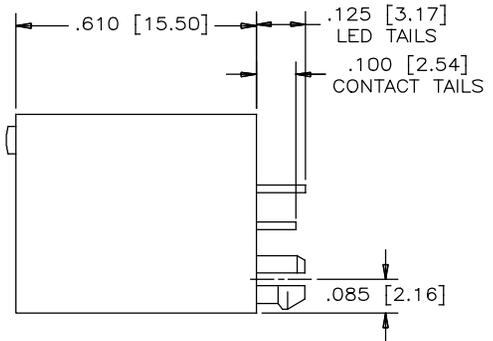


A B C D E F G H

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	PROPOSAL	JUL04/06	L.CHAN
D	REVISE FOR DIRECTION OF BOARD LOCK	FEB13/17	L.CHAN

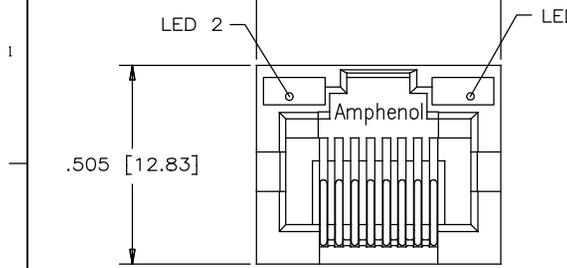

RECOMMENDED PANEL CUTOUT

BI-COLOUR LED DETAIL
(RED/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

MATERIALS:


PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS: PHOSPHOR BRONZE
(FLAT) PLATING: 50 μ" [1.27 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM
FOR 5 SEC MAXIMUM.

AMPHENOL PART NUMBER: RJHSE-N08X

REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

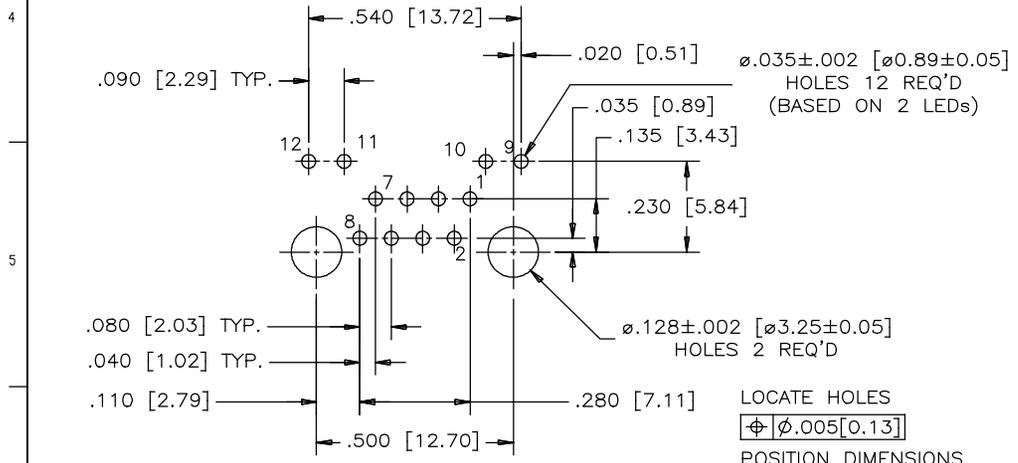

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
⊕ ⌀.005 [0.13]
POSITION DIMENSIONS
ARE BASIC

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	DATE JUL04/06
PRIMARY UNITS INCH	CHECKED CHIGOW	JUL04/06
SECONDARY MILLIMETER	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.30	ENG. REL. NO.	
2 DECIMAL PLACES ±0.25	REF.	
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

Amphenol Canada Corp.
www.amphenolcanada.com

TITLE SINGLE-PORT HIGH SPEED MODULAR JACK,
VERTICAL MOUNT, BLACK HOUSING,
8 POSITIONS, 8 FLAT CONTACTS, WITH LED OPTIONS
UNSHIELDED, WITHOUT FLANGE - RoHS COMPLIANT

DWG. NO. P-RJHSE-N08X REV D

CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1

A B C D E F G H