

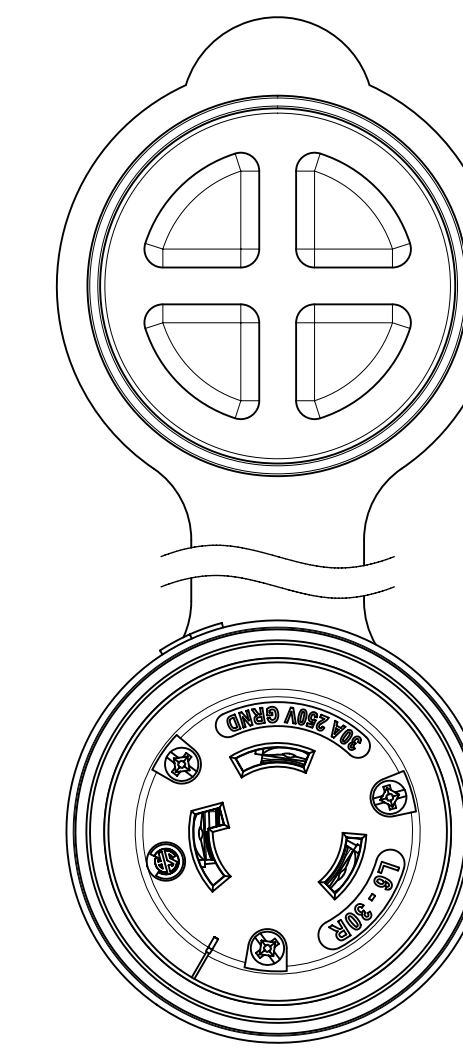
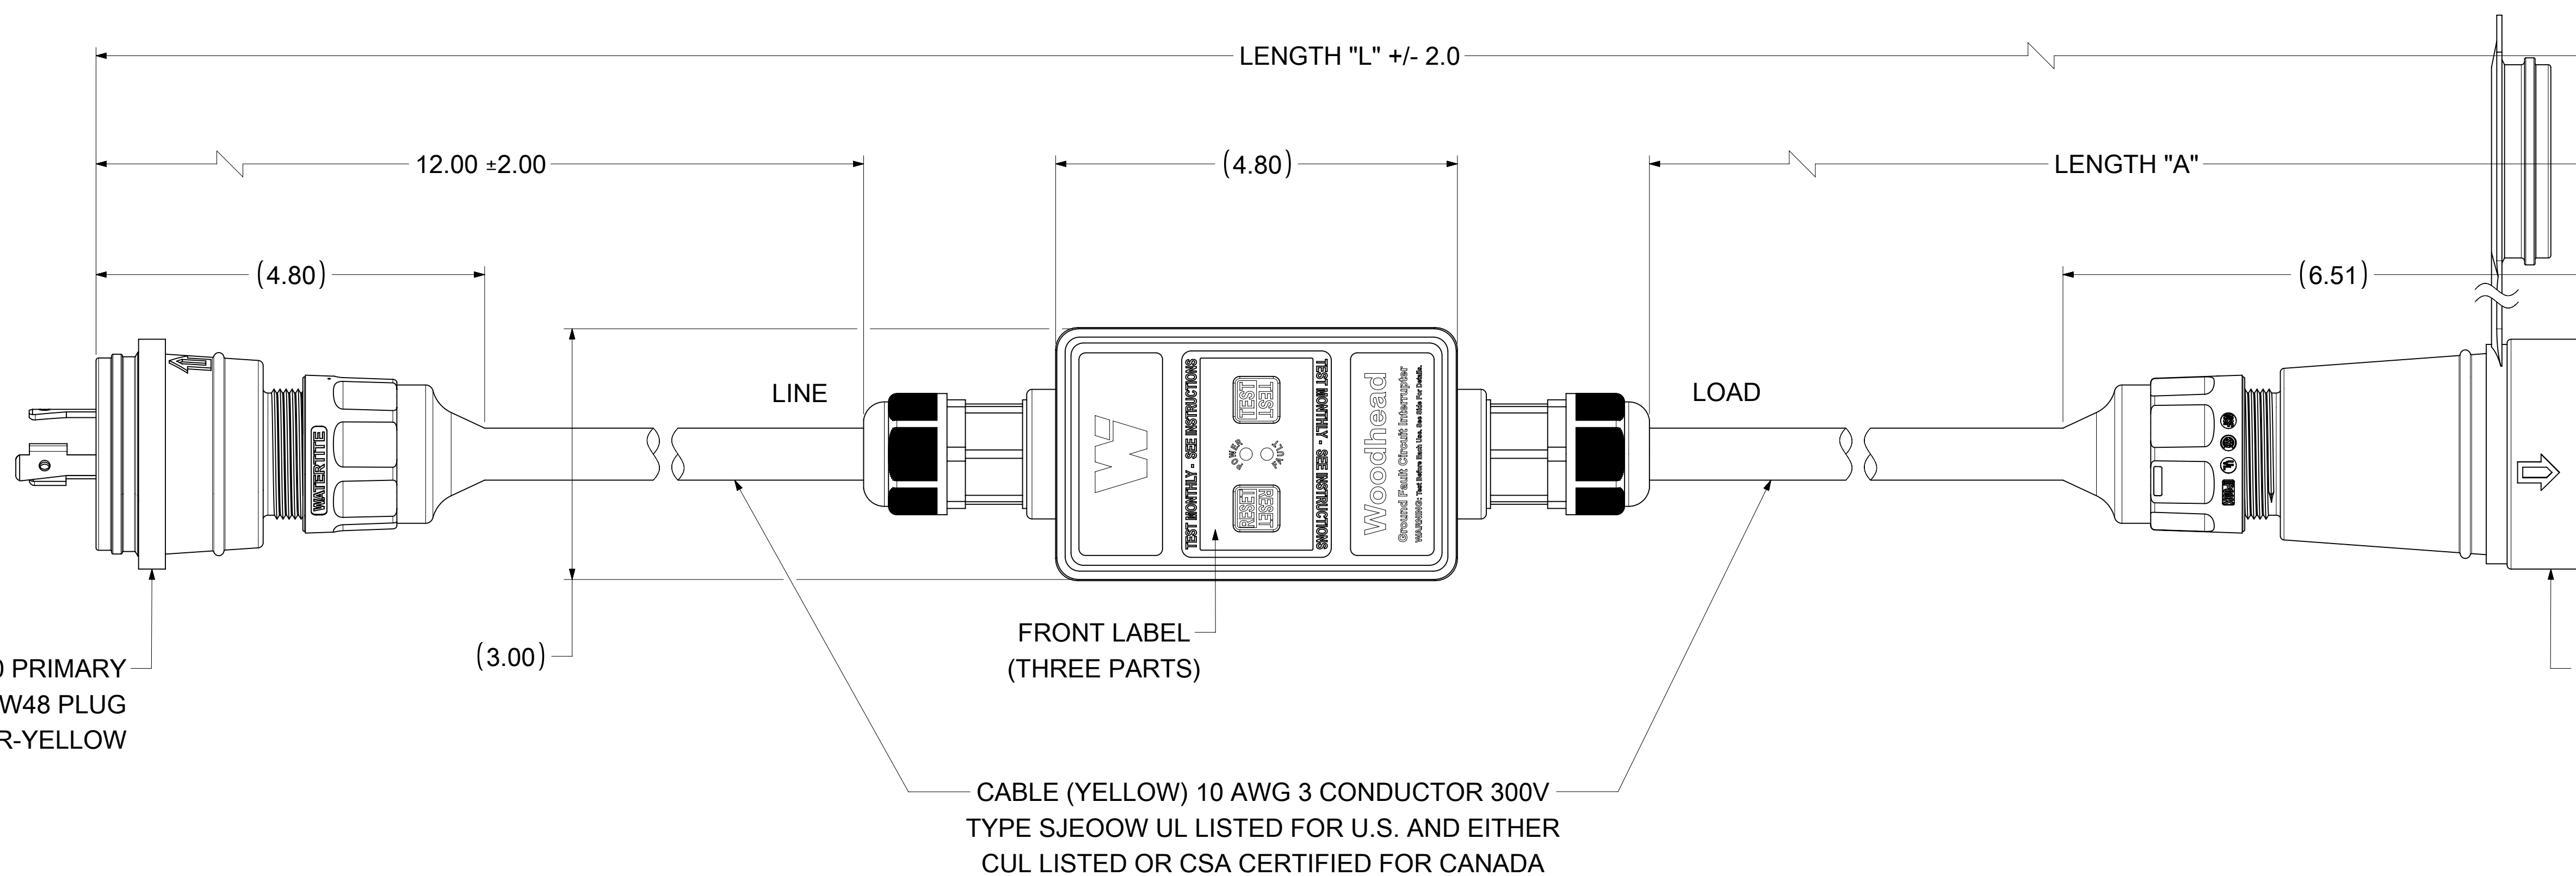
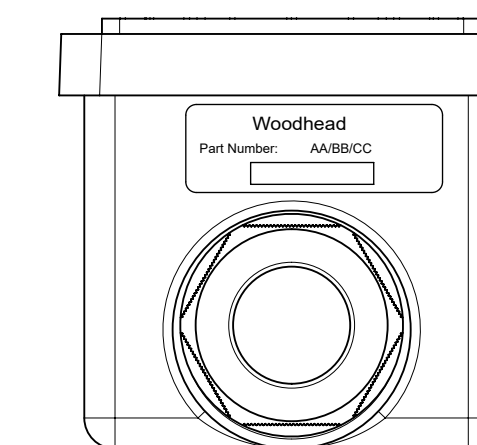


NEMA L6-30 PRIMARY
WOODHEAD #28W48 PLUG
COLOR-YELLOW

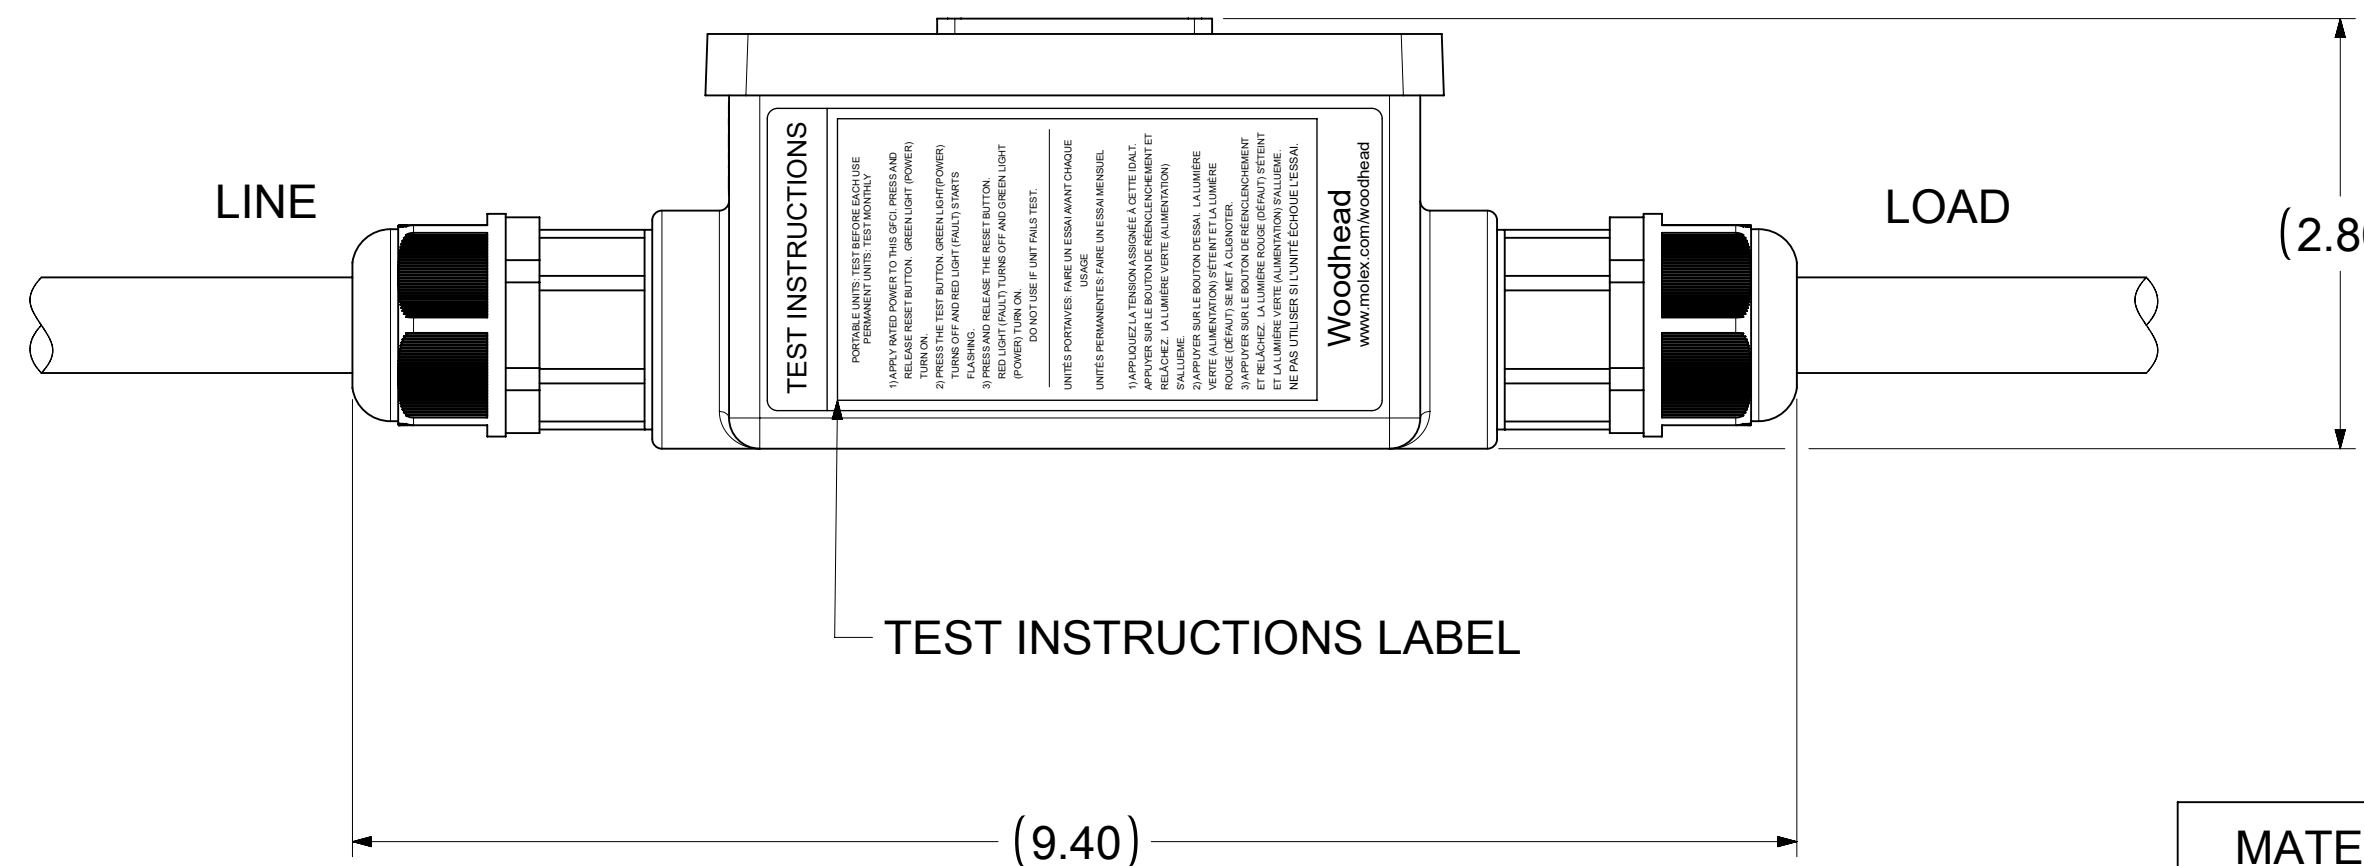

NEMA L6-30 SECONDARY
WOODHEAD #29W48 CONNECTOR
COLOR-YELLOW

CABLE (YELLOW) 10 AWG 3 CONDUCTOR 300V
TYPE SJE00W UL LISTED FOR U.S. AND EITHER
CUL LISTED OR CSA CERTIFIED FOR CANADA

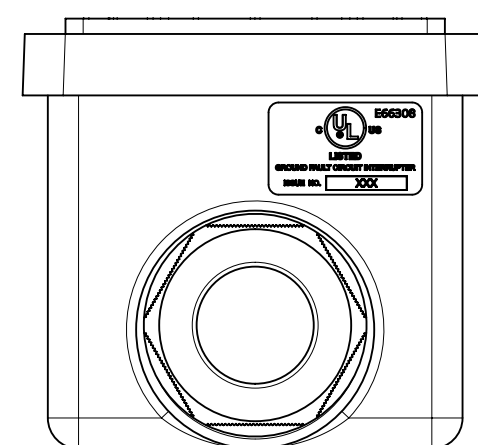

TEST INSTRUCTIONS LABEL

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	240VAC
RATED CURRENT:	UP TO 30 AMPS
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	180 AMPS, 0.45PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 4X/6P

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530193	30054-1A	2 FT 9.4 IN.	1 FT	AUTO
1301530199	30054-6A	7 FT 9.4 IN.	6 FT	AUTO
1301530196	30054-25A	26 FT 9.4 IN.	25 FT	AUTO
1301530194	30054-1M	2 FT 9.4 IN.	1 FT	MANUAL
1301530200	30054-6M	7 FT 9.4 IN.	6 FT	MANUAL
1301530197	30054-25M	26 FT 9.4 IN.	25 FT	MANUAL

FUNCTIONAL SYMBOLS FA = 0 FC = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NEW SALES DRAWING CREATED		
	DIMENSION UNITS INCH	SCALE NTS	 30A/240V INLINE GFCI AUTO 2FT WATERTITE NEMA		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 666699 DRWN: PPURSTANDEL 2021/07/06 CHK'D: DNGUYEN62 2021/08/16 APPR: HKNEELAND 2021/08/17			
DIVISIONAL SYMBOLS	ANGULAR TOL ± °		INITIAL REVISION:		
	4 PLACES ±	3 PLACES ±	DRWN: PPURSTANDEL 2021/07/06 APPR: HKNEELAND 2021/08/17		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING D-SIZE	SERIES 130153	MATERIAL NUMBER 1301530193
			SEE TABLE	CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1