


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MAX. BUNDLE DIA.	PACKAGE QTY.	"L" LENGTH +/- .3" [7]
MLT4SH-LP	4" [102]	50	17.1" [434]
MLT6SH-LP	6" [152]	50	23.4" [594]
MLT8SH-LP	8" [203]	50	29.7" [754]
MLT10SH-LP	10" [254]	50	35.9" [912]
MLT12SH-Q	12" [305]	25	42.2" [1072]

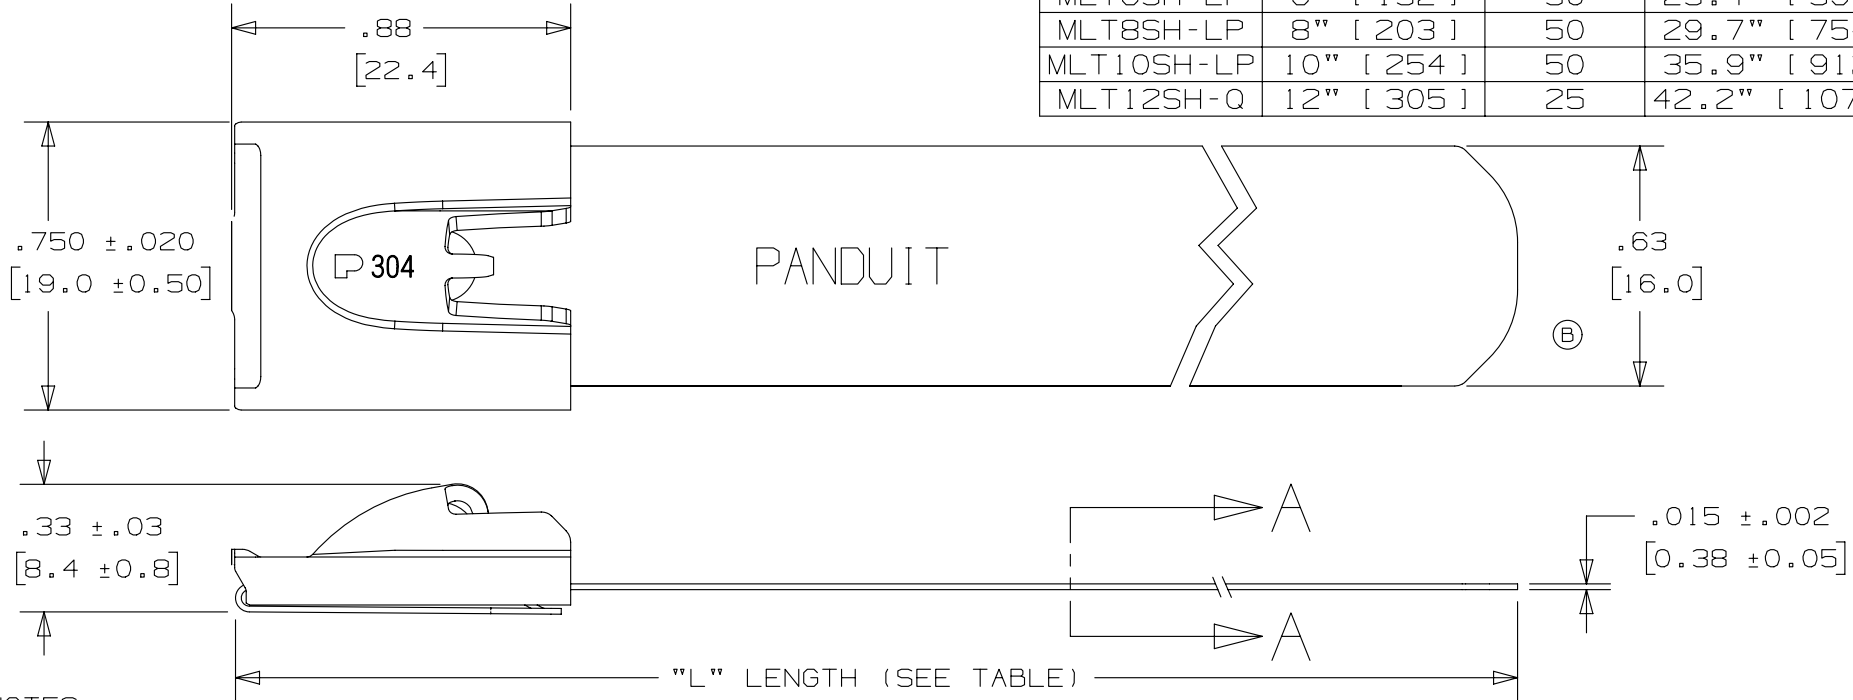

NOTES:

1. APPLICATION TOOLS - RTIHT
2. MINIMUM LOOP TENSILE STRENGTH - 900 LBS. (4005 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES: .XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

SECTION A-A
SCALE: 4x
BROKEN EDGES TO ELIMINATE SHARPNESS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	4/13	JAMB	MIM	RGRO	UPDATED DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01047
03A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING FOR REFERENCE ONLY. ORIG CAD FILE SPEC WAS S41163_02	-----
02	6/05	JAMB	EJD	---	ⓑ ADDED NEW TIP CONFIGURATION	SS00011
01	8/04	JAMB	DPN	JJB	Ⓐ REMOVED "AISI NO.5"	11907
00	1/04	JAMB	DPN	JJB	DRAWING RELEASED	11307

TITLE						
METAL LOCKING TIE - SUPER HEAVY DUTY						
CUSTOMER DRAWING						
ITEM REVISION NAME		N41163BS/04		PANDUIT		
DATASET FILE NAME		N41163BS/04A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL:		
.x ± .1 [2.54]		.xxx ± .005 [.127]		304 STAINLESS STEEL		
.xx ± .01 [.25]		ANGLES ± 5 °				
			THIRD ANGLE PROJECTION		DRAWING NUMBER:	
					N41163BS_DC	
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE
JAMB	1/04	DPN	2:1			A