

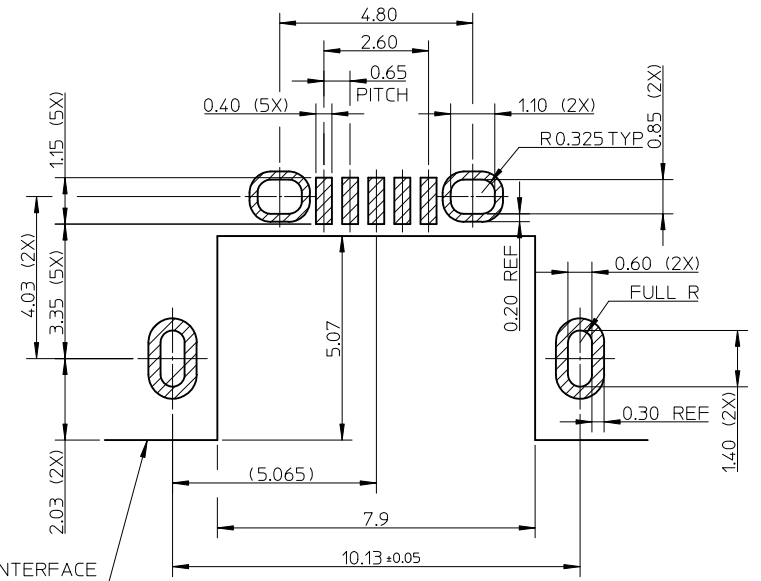
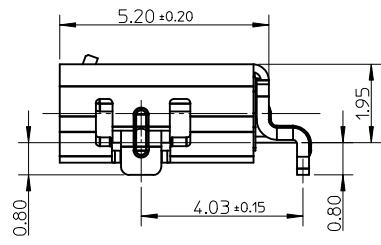




- NOTES:
- MATERIAL:
 - HOUSING: LCP, BLACK, UL94V-0;
 - TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
 - SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
 - PLATING:
 - TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75 MICRON Pd/Ni;
 - SOLDER TAIL AREA: GOLD FLASH;
 - UNDER PLATING: NICKEL 2.0 MICROMN MINIMUM.
 - SHELL: 127 MICRON MATTE TIN;
 - UNDER PLATING: NICKEL 127 MICRON MINIMUM.
 - TAIL COPLANARITY 0.08mm MAXIMUM.
 - PRODUCT SPECIFICATION: PS-47642-001.
 - PACKAGING SPECIFICATION: PK-47654-001.
 - COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

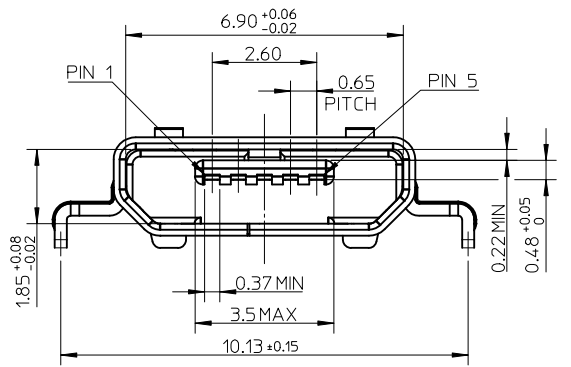




CONNECTOR FRONT INTERFACE & PCB FRONT EDGE
 RECOMMENDED PCB LAYOUT (Thickness=0.9mm)
 GENERAL TOLERANCE: ±0.05mm

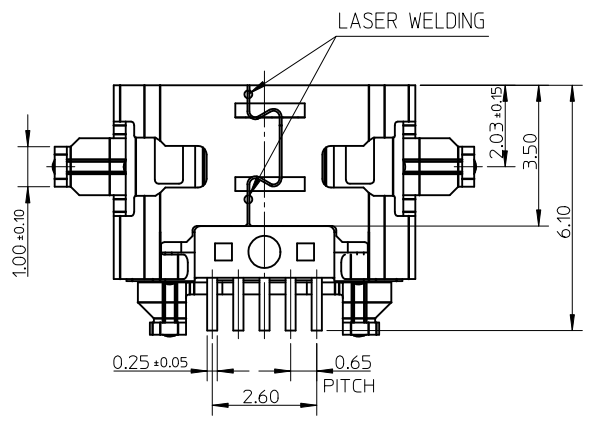


NEW RELEASE EC NO: SH2012-0399 DRWN: XQZHANG CHKD: XQZHANG APPR: AYIN	2012/06/01 2012/06/04 2012/06/11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		$F_A = 0$ $F_G = 0$ $F_P = 0$	mm	INCH	MM ONLY	1:1	METRIC	MICRO USB B REC. MID-MOUNT TYPE		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.20 ± --- 1 PLACE ± 0.25 ± --- 0 PLACE ± --- ± ---	ANGULAR ± 3 °		DRAWN BY	DATE	TITLE			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		47665-1111	SD-47665-111	1 OF 1				
MATERIAL NO. 47665-1111 DOCUMENT NO. SD-47665-111		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

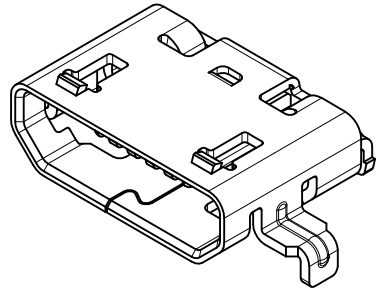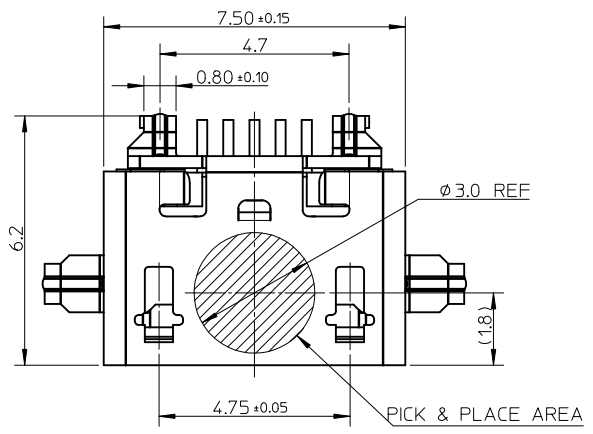

- NOTES:
- MATERIAL:
 - HOUSING: LCP, BLACK, UL94V-0;
 - TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
 - SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
 - PLATING:
 - TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75 MICRON Pd/Ni;
 - SOLDER TAIL AREA: GOLD FLASH;
 - UNDER PLATING: NICKEL 2.0 MICROMN MINIMUM.
 - SHELL: 127 MICRON MATTE TIN;
 - UNDER PLATING: NICKEL 127 MICRON MINIMUM.
 - TAIL COPLANARITY 0.08mm MAXIMUM.
 - PRODUCT SPECIFICATION: PS-47642-001.
 - PACKAGING SPECIFICATION: PK-47654-001.
 - COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

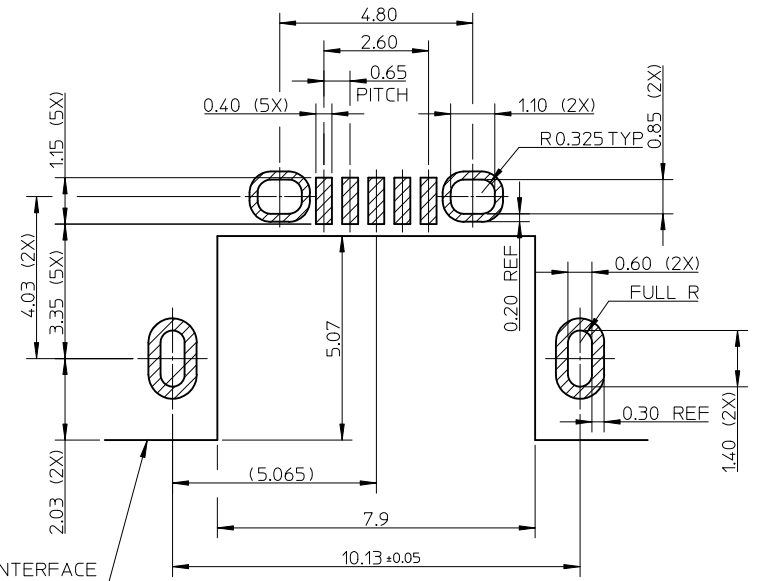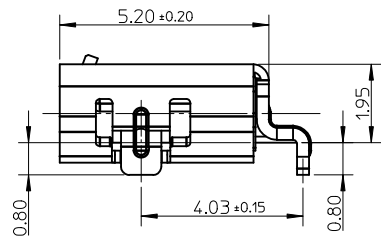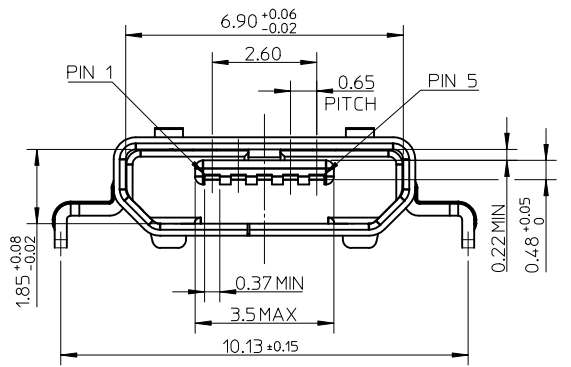

CONNECTOR FRONT INTERFACE & PCB FRONT EDGE
 RECOMMENDED PCB LAYOUT (Thickness=0.9mm)
 GENERAL TOLERANCE: ±0.05mm

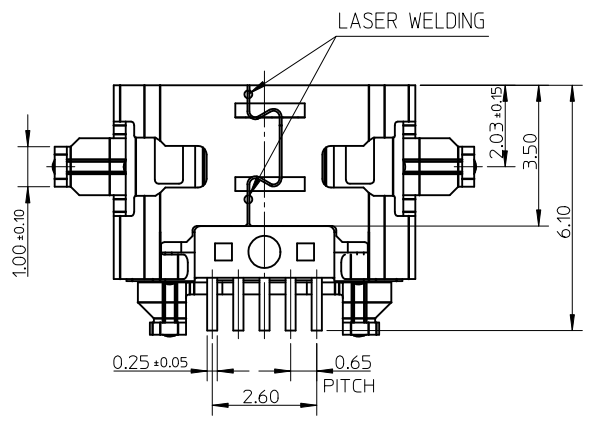

NEW RELEASE EC NO: SH2012-0399 DRWN: XQZHANG CHKD: XQZHANG APPR: AYIN	2012/06/01 2012/06/04 2012/06/11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		$F_A = 0$ $F_G = 0$ $F_P = 0$	mm	INCH	MM ONLY	1:1	METRIC	MICRO USB B REC. MID-MOUNT TYPE		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.20 ± --- 1 PLACE ± 0.25 ± --- 0 PLACE ± --- ± ---	ANGULAR ± 3 °		DRAWN BY	DATE	TITLE			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE	MATERIAL NO.	DATE	DOCUMENT NO.			
A	REV			A3	47665-1111	2012/05/02	SD-47665-111			
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO.		1 OF 1		