

MATERIALS AND FINISHES

4.3-10 PLUG CONNECTOR
SEE SD-73162-680

N PLUG CONNECTOR
SEE SD-73141-459

SHRINK TUBE: PE

CABLE: FLEXIFORM 401 FJ

LABEL: PET

(ALL MATERIAL COMPLIANT RoHS)

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0-3GHz

WITHSTAND VOLTAGE(AC): 1500V @0.5mA

RETURN LOSS: $\leq -25\text{dB}$ (1700-2700MHz),


PIM3(2x43dBm): $\leq -160\text{dBc}$ @1800MHz/2100MHz/2600MHz

WATER-PROOF: IP68 (WHEN MATED)

NOTE 1:

PACKAGING BY PLASTIC BAG

NOTE 2: CABLES SHIPPED
WITH POLYETHYLENE DUST
CAPS ON CONNECTORS

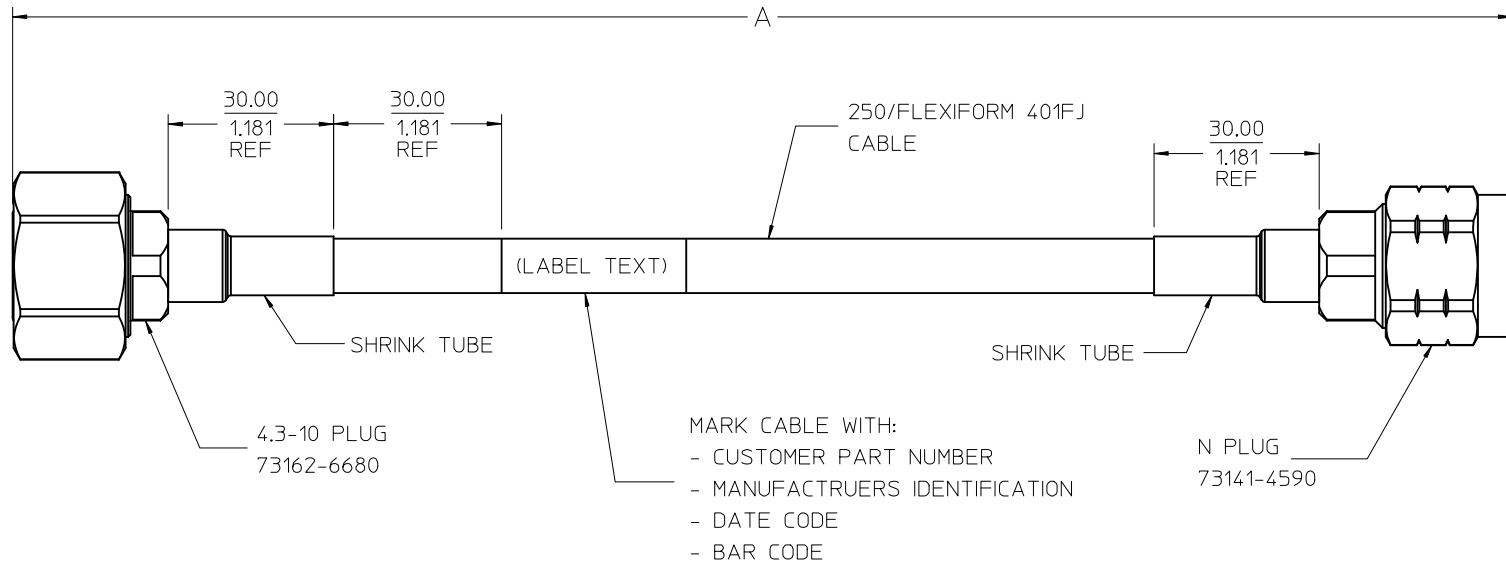

-----	-----	-----	-----
73135-6680	8.543±.118	217.00±3.00	09-140-01
PART NO.	IN	MM	LABEL TEXT/CUSTOMER PN.
A			

IEC60169-16	N INTERFACE
IEC61169-54	4.3-10 INTERFACE
SPECIFICATION	DESCRIPTION

CHG: NEW RELEASE PER PDRJ1606974	EC NO: URF2017-0042	QUALITY SYMBOLS
	DRWN:YHUANG11 2016/07/01	▽=0
	CHKD:MXU11 2016/07/01	▽=0
	APPR:MYE08 2016/08/01	▽=0
	REV A	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
0 PLACE ± --- ± ---
ANGULAR ± 2°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE
MM/IN	
DRAWN BY	DATE
YHUANG11	2016/07/01
CHECKED BY	DATE
MXU11	2016/07/01
APPROVED BY	DATE
MYE08	2016/08/01
MATERIAL NO.	DOCUMENT NO.
SEE TABLE	SD-73135-668

TITLE	THIRD ANGLE PROJECTION
4.3-10 PLUG TO N PLUG WITH 250/401 FJ CABLE CA-4.3-10-N, 50 OHMS	
molex	
SHEET NO.	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	