


Power Double Lock

TE Internal #: 2005251-1 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Glow Wire Power Double Lock Plug

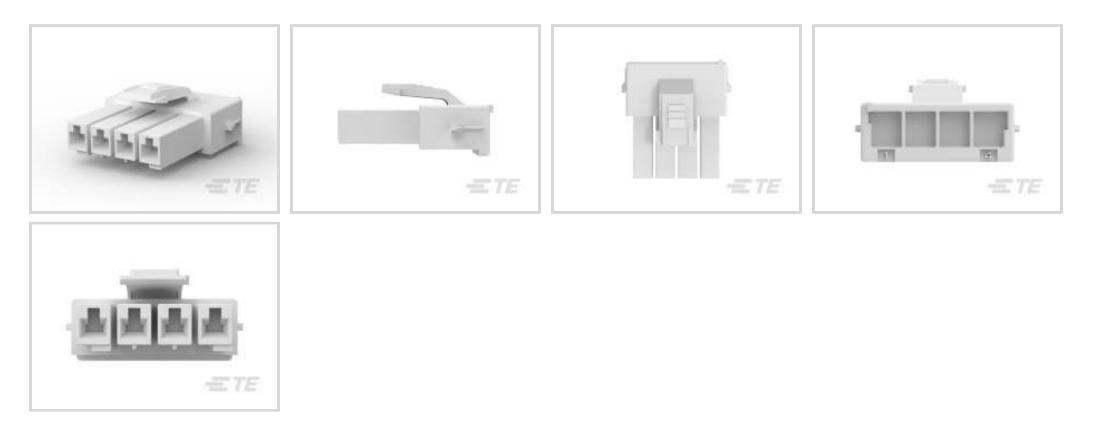

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 3.96 mm [.156 in]

All Glow Wire Power Double Lock Plug (55)

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	1
Electrical Characteristics	
Operating Voltage	300 VAC
Contact Features	

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	PA 66
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Agency/Standard	CNR, USR
Approved Standards	CSA/C22.2 No. 182.3-M1987, UL 1977
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)
Packaging Features	
Packaging Quantity	250
Packaging Method	Bag
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235)

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Power Double Lock

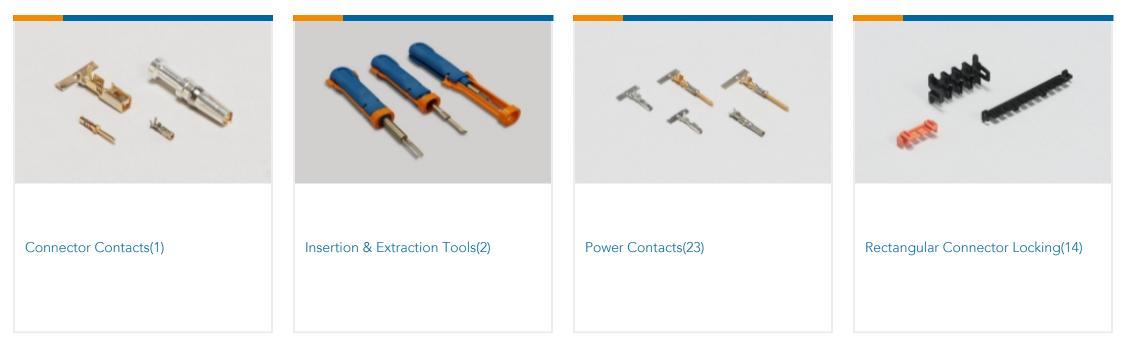

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock





Customers Also Bought



Documents

Product Drawings PDL 4P PLUG 3.96 S/R(GWT) NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2005251-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2005251-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2005251-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

& For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 4 Position, 3.96 mm [. 156 in] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



Product Specifications Application Specification

English

Product Environmental Compliance Product Compliance

English

Product Compliance

English