

## DC-B 6-HD-M25-M


Order No.: 1602054



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1602054>

DUPLICON, aluminum stackable housing for DUPLICON contact inserts, type B6, IP67 protection, with two locking latches, gasket and an M25 cable screw connection thread (without cable screw connection)

### Commercial data

GTIN (EAN)	
sales group	D070
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 407 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
07/05/2004



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Design	DC-B6
Height	37 mm
Color	pearl gray

Locking type	With locking latch
Cable exit	Lateral
Type of the screw connection	With M25 thread
Pg screw connection	None
Degree of protection	IP65/IP66/IP67
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	EMC-conductive
Seal material	NBR
Material lock	Stainless steel
Material grip body interlock	PA

### Certificates / Approvals




Certification VDE-PZI

### Accessories

Item	Designation	Description
<b>General</b>		
1602326	DC-B 6-A-HD-G	DUPLICON, profile gasket for stackable housing, made of conductive EPDM
1690574	HC-M-KV-M25(11-16)	Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 11 - 16 mm, WAF 27, screw connection: M25
1646007	HC-M-KV-M25(14-21)	Metal screw connection up to 5 bar, thread length: 7 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M25
<b>Marking</b>		
0816854	EML (26,5X12)R SR	Labels for thermal transfer printers, lettering field: 26.5 mm x 12 mm, 1 roll = 2,500 labels

**Diagrams/Drawings**

Dimensioned drawing

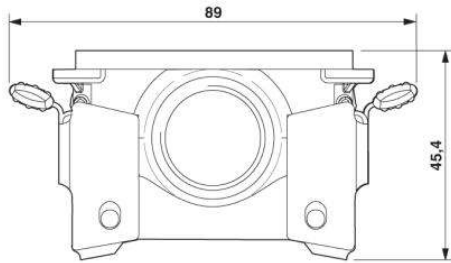

Dimensional drawing

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;