

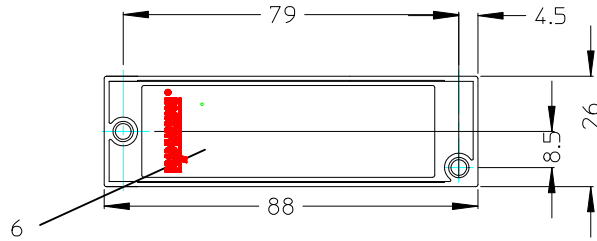
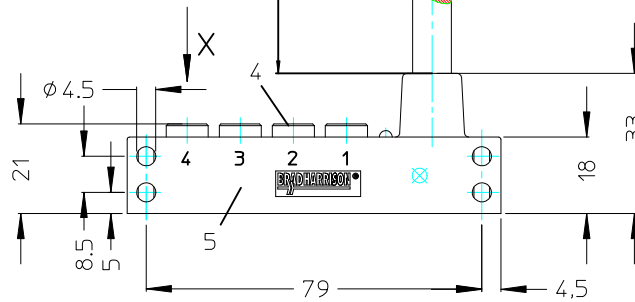
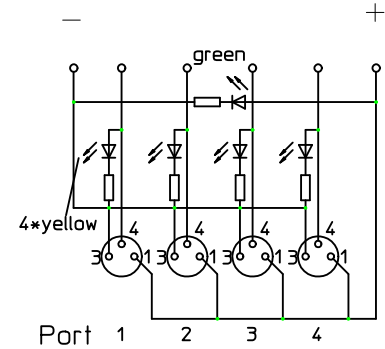


SAP-NUMBER	OLD PART NUMBER	FINISHED LENGTH
1201135063	BNY401P-FBM-05	5000
1201130024	BNY401P-FBM-10	10000

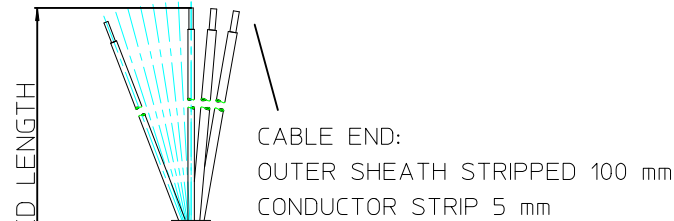

Ansicht X



Contact configuration	wire colour		wire mm ²	Port	M8 connector Contact-No.
M8 connector 	brown	(+)	0.75	1-4	1
	blue	(-)	0.75	1-4	3
	white		0.34	1	4
	green		0.34	2	4
	yellow		0.34	3	4
	grey		0.34	4	4

CLOSURE CAP

SAP no. 1203080677
Quantity 2

VOLTAGE RATING	10 - 30 VDC
AMPERAGE RATING PER PORT	2 A MAX./PORT 6 A MAX. TOTAL
PROTECTION	IP 67
OPERATING TEMPERATURE	-25°C / +90 °C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PUR	BLACK
2	CONTAC SOCKET	BRASS	GOLD OVER NICKEL
3	O-RING	VITON	---
4	RECEPTACLE SHELL	BRASS	NICKEL PLATED
5	HOUSING	PBT	YELLOW
6	LABEL	ABS	WHITE
7	LENS	PA	CLEAR
8	CABLE	PUR/PVC	---

NEW RELEASE
EC NO: WEU2010-0248
DRWN:SBH 2010/01/08
CHKD:APOHL WEU 2010/01/08
APPR:NSTAUDIGEL 2010/01/29

DESCRIPTION
A

QUALITY SYMBOLS
▽=0
◻=0

	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± 0.3	± ---
ANGULAR ± ---°		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY: SBH
DATE: 2010/01/08

CHECKED BY: APOHL WEU
DATE: 2010/01/08

APPROVED BY: NSTAUDIGEL
DATE: 2010/01/29

MATERIAL NO.
SEE TABLE

SIZE
A3

SCALE: _____ DESIGN UNITS: **METRIC**

THIRD ANGLE PROJECTION

TITLE
**M8-MPIS 4 PORT CABLE
90 DEGREE 3 POL OUTLINE**

molex MOLEX INCORPORATED

DOCUMENT NO. **SD-120113-021** SHEET NO. **1 OF 1**

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION