


## CUSTOMER DRAWING

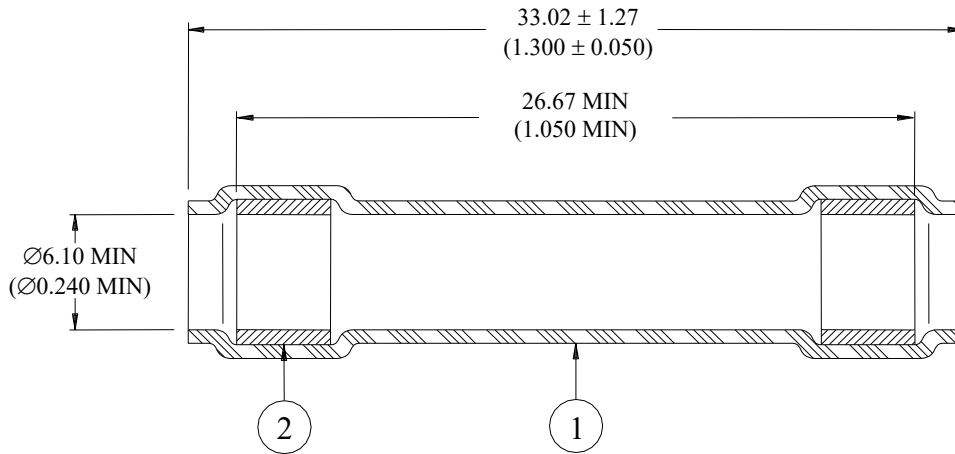


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified fluoropolymer.
2. MELTABLE INSERT: Environment resistant modified thermoplastic fluoropolymer. Color: Clear

### APPLICATION

1. This device is designed to provide immersion resistant 1 to 1 splices in wires having insulations rated for at least 135°C and conductor falling within the wire size range as listed above.
2. Continuous Operating Temperature of 200°C (392°F)
3. Free recovered I.D. of sealing sleeve is 1.27 (0.050) maximum (through inserts).

			TITLE: <b>SEALING SLEEVE</b>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		<b>Raychem Devices</b>	DOCUMENT NO.:  <b>D-200-09</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV:  <b>C1</b>	DATE:  April 22, 2019	
PREPARED BY: <b>YNGUYEN</b>	CAGE CODE: <b>06090</b>	REVISED PER. <b>ECO-19-006051</b>	SCALE: DO NOT SCALE	SIZE: A	SHEET: 1 of 1