


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/17/07	-	INITIAL RELEASE
A	06/06/12	-	ADD NOTES

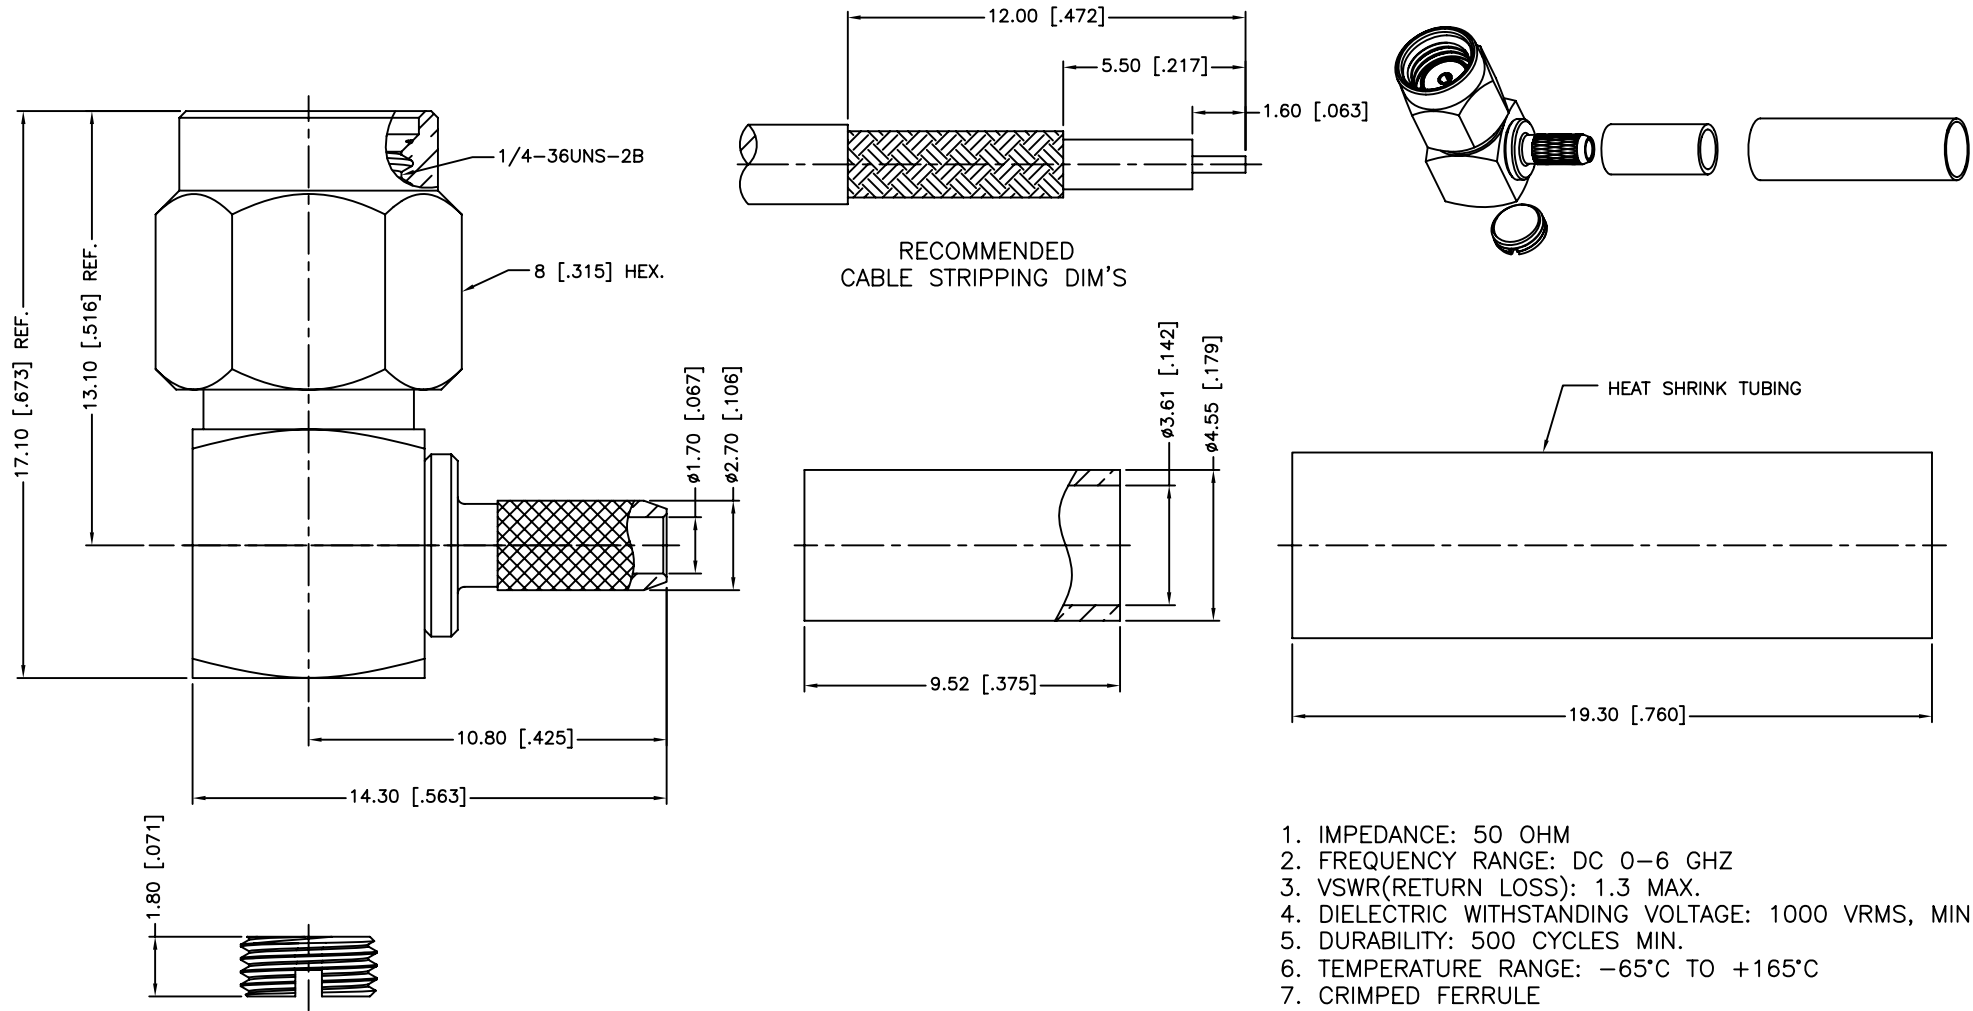

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-6 GHZ
3. VSWR(RETURN LOSS): 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C
7. CRIMPED FERRULE
HEX. CRIMP SIZE .151"
8. CONTACT PIN TO SOLDER

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION					
9	HEAT SHRINK TUBING	BLACK	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN M.ZHANG	06/06/12	Amphenol Connex SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG-316U/D,188A/U DOUBLE BRAID CABLE)					
8	FERRULE	COPPER	GOLD							1	CHECKED	
7	COVER	BRASS	GOLD							1	ISSUED	
6	GASKET	SILICON RUBBER	RED							1	SHEET	1 OF 1
5	RETAINER RING	SUS 304	NATURAL	1	PART NO.			132182RP				
4	CONTACT PIN	BERYLLIUM COPPER	GOLD	1	CAD FILE			C:/CONNEX/132182RP.DWG				
3	INSULATOR	PTFE	NATURAL	1	DWG. NO.			132182RP.DWG				
2	HOUSING WITH BARREL	BRASS	GOLD	1	REV.			A				
1	SHELL	BRASS	GOLD	1	SIZE			A				
				DO NOT SCALE DRAWING	SCALE			NA				