



Part Number:	SW121308-2	
	DRAWN	CJ 7/9/2020
	CHECKED	P.D. 7/9/2020
Description:	Waterproof Speaker	APPROVED
		J.S. 7/9/2020
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		

Top View

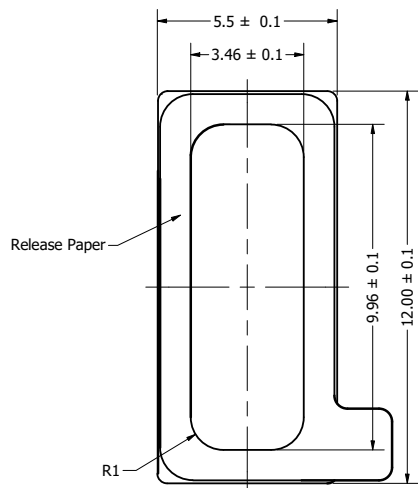


3.44 ± 0.1 Total height with release paper


Side View (1)

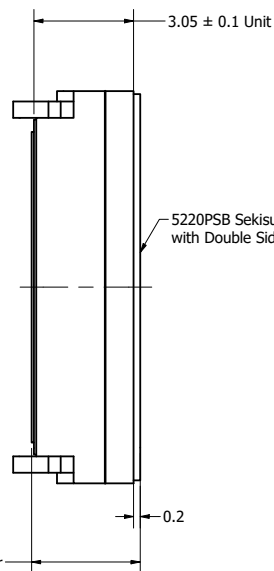


Bottom View

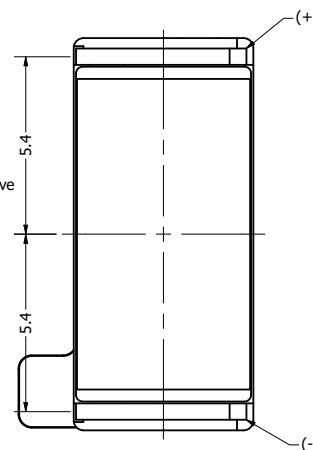

Side View (2)



Suggested Pad Layout

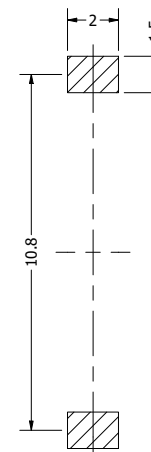

Items	Specifications	Conditions
Sound Pressure Level	89	dB (@ 0.4W/10cm), In 2cc chamber
Resonant Frequency	1,300	Hz, In 2cc chamber
Frequency Range	1,300 ~ 20,000	Hz, In 2cc chamber
Nominal Power	0.4	W, In 2cc chamber
Max. Power	0.6	W, In 2cc chamber
Impedance	8	Ω
Cone Material	PEEK	
Mount Type	Flush Mount	
IP Rating	IPX8	
Storage Temperature	-30 ~ +70	°C
Operating Temperature	-20 ~ +60	°C

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
	Released from Engineering	7/9/2020	J.S.

NOTES

- 1) All dimensions are in mm unless otherwise noted
- 2) All tolerances are ± 0.2 mm unless otherwise noted
- 3) All parts meet RoHS
- 4) Subject to change or redrawn without notice