


UNIT OF MEASURE	A	B	C	D	E	LENGTH OVERALL	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.180	.168	.097	.149	.037	4.34	.75	18 lbs.
MM	4.57	4.27	2.46	3.78	.94	110.	19.1	8.165 kg.

UNIT OF MEASURE	F	G	H	J	L	W
INCHES	3.915	.364	.810	.033	.736	.307
MM	99.44	9.25	20.57	.84	18.69	7.80

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

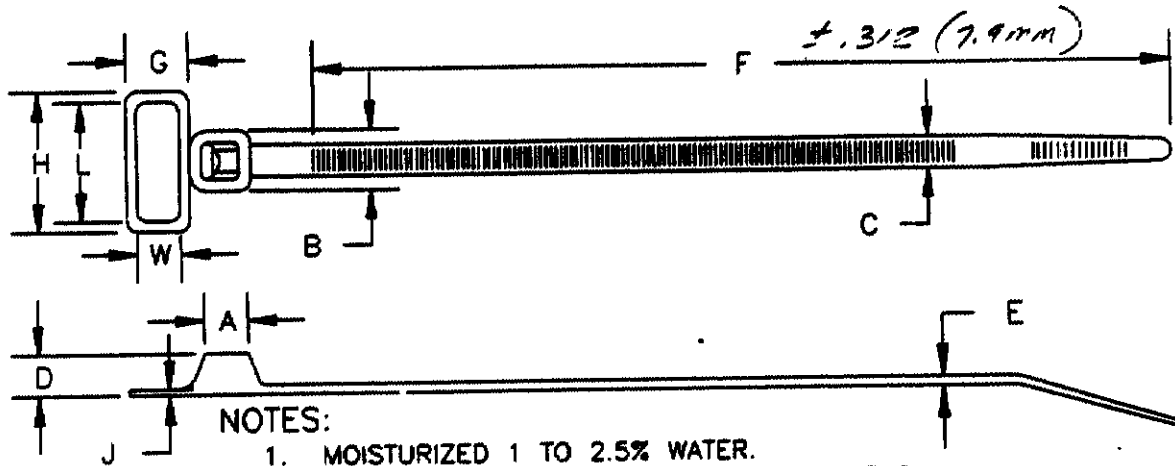

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.

APC ENGINEERING

JUL 13 1990

ISSUED BY *Accu*

CUSTOMER DRAWING UNPUBLISHED

	6-603230-9	NATURAL 200 FTY34D	
	1-603230-9	NATURAL 100 FTY34C	
	DWG SIZE	PART No.	DESCRIPTION
		REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)	

LOC	D
DIST	1

QTY. REQ'D. PER ASSY.

PARTS LIST

MATERIAL	NYLON 6/6	HEAT TREAT		FINISH	
DIMENSIONS ARE IN INCHES		DRAWN BY:	DATE:	APPROVED BY:	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		AD-TER/VL	5/25/90		
2 PL DEC ±		CHECK BY:	6/90	RELEASE:	
3 PL DEC ± .039		BJM		7. Hamed 6/90	
4 PL DEC ±		AMP AMP INCORPORATED Harrisburg, Pa.			
ANGLES ±					
SURF TEXTURE: J		NAME: IDENTIFICATION CABLE TIE 4-1/4 INCH			
REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.					

SCALE:	A	DRAWING No.:	603230	SHEET :	1 OF 1	REV.:	C
P	F	LTR	REVISION RECORD	APP	DATE		