
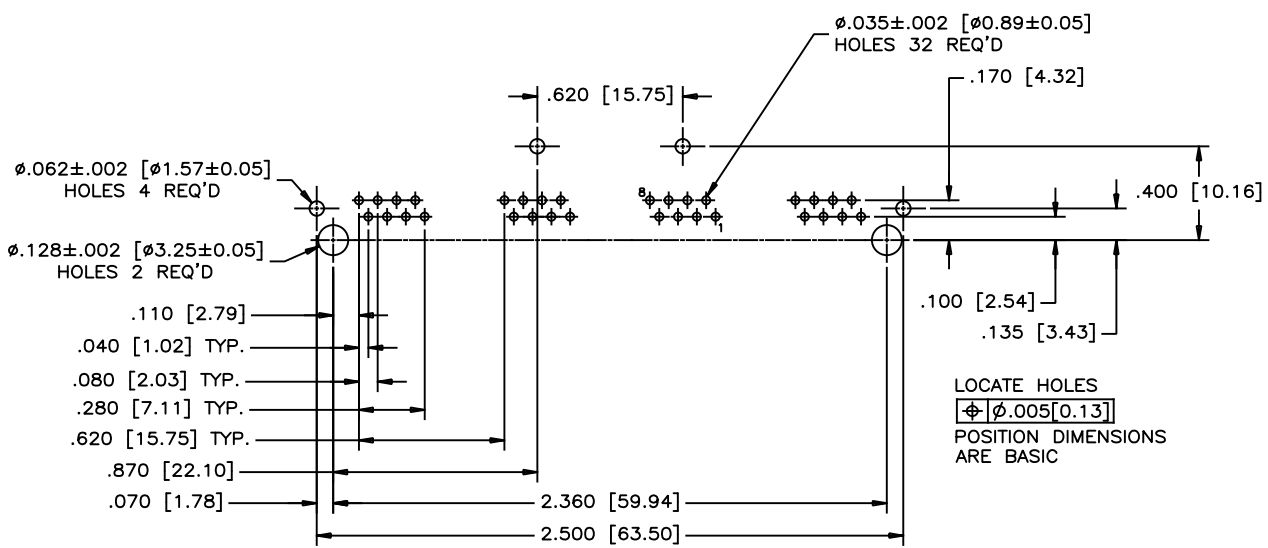
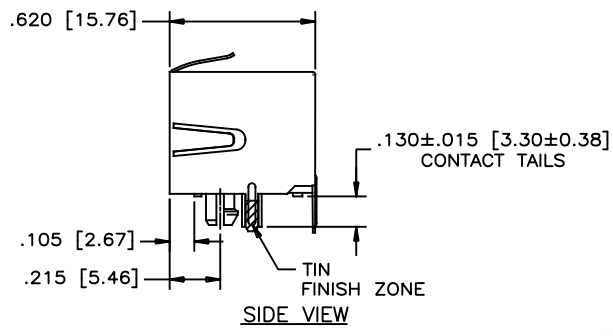


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN05/19	L.CHAN

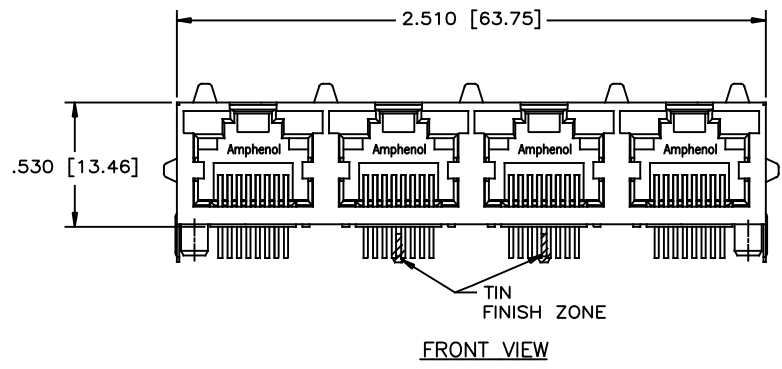

MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0,
 COLOR BLACK

CONTACTS:
 PHOSPHOR BRONZE
 PLATING: GOLD PLATING ON MATING SURFACE.
 [SEE PART NUMBER FOR THICKNESS]
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING AT 260°C MAXIMUM FOR
 5 SEC MAXIMUM.


SHIELD: STAINLESS STEEL WITH MATTE TIN FINISH ON SOLDER TAIL

LOCATE HOLES
 $\phi \pm .005 [0.13]$
 POSITION DIMENSIONS
 ARE BASIC

PART NUMBER: RJHSE-X380-A4

GOLD PLATING

E=RJ45 FLAT CONTACT 6μ"
 G=RJ45 FLAT CONTACT 15μ"
 J=RJ45 FLAT CONTACT 30μ"
 5=RJ45 FLAT CONTACT 50μ"

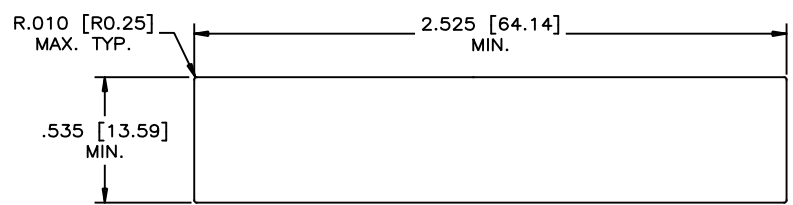

UNLESS SPECIFIED OTHERWISE	DRAWN <i>W.QIU</i>	DATE <i>JUN05/19</i>
PRIMARY UNITS INCH	CHECKED <i>L.CHAN</i>	DATE <i>JUN05/19</i>
SECONDARY MILLIMETERS	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.025	ENG. REL. NO.	
2 DECIMAL PLACES ±0.020	REF.	
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

Amphenol Canada Corp. Commercial Products	
TITLE 4 PORT, HIGH SPEED, MODULAR JACK, 8P8C, 0.13" LONG TAIL SHIELDED W/O LED'S - RoHS COMPLIANT	
DWG. NO. P-RJHSE-X380-A4	REV A
CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.