


# Keystone jack RJ45 Cat 5e Vertical Type Dual IDC

KJ7-8P8C-C5E-90-LA

**Hyperline**  
CABLING SYSTEMS

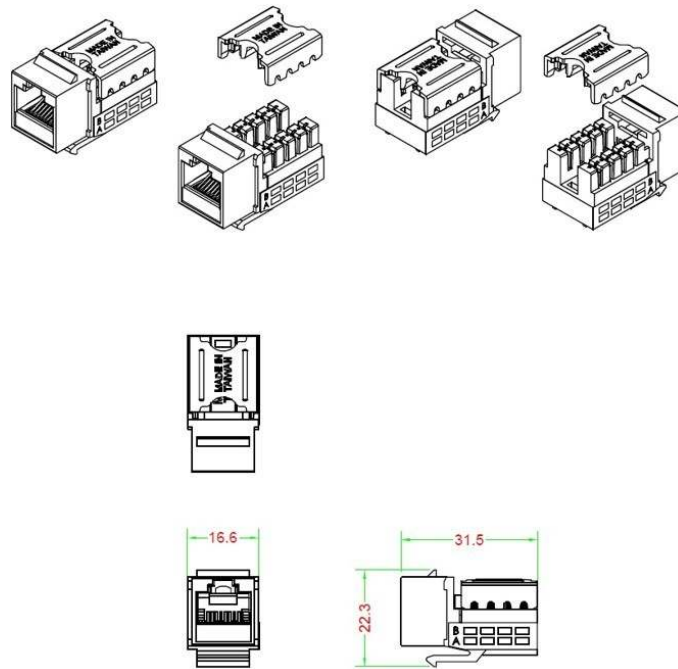

## Performance:

Meets C5e EIA/TIA 568B Standard.

## Materials:

Body : Fireproof ABS UL-94V0  
Jack : 8P8C 6 micro inches gold plated  
PCB : FR-4 / UL-94V0  
IDC Cap : Fireproof ABS UL-94V0  
IDC Body : Fireproof ABS UL-94V0  
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.  
For 110 punch-down Tool

## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)  
Contact Resistance : 20m ohms (max.)  
Current Rating : 1.5 Amps .  
DC Resistance : 0.1 ohms (max.)  
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 m

## Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)  
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

## Ordering

KJ7-8P8C-C5E-90-LA	Keystone Jack RJ45 Cat 5e Vertical Type Dual IDC Almond
--------------------	---