
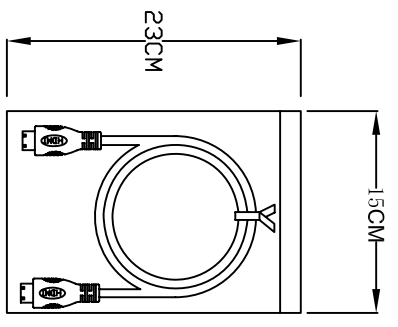


1. Wiring Diagram.

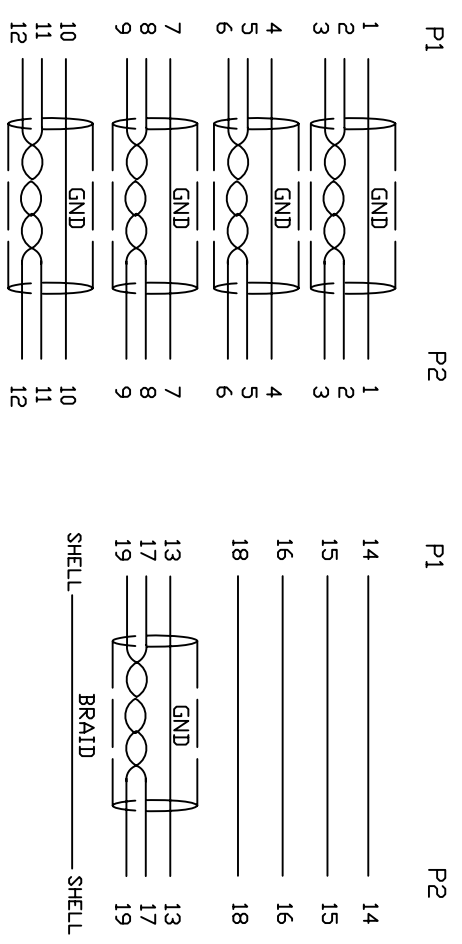

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

5	COPER	W/20MM*L35MM	1			A	INITIAL RELEASE	2015/10/10
4	PVC	45P PVC BLACK OVERMOLD	25g			REVECHN#	DESCRIPTION	DATE
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g					
2	CONN	HDMI C TYPE MALE PIN G/F ,SHELL PLATED NICKEL, INSULATION BLACK	2		P1,P2			
1	CABLE	UL20276 《30AWG (7/0.1TS) *JP+EA+AL/MY》*5+30AWG (7/0.1TS) *4C +AEM(16/6/0.12AM) OD6.0 BLACK	1		3000mm			
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF				
BILL OF MATERIAL								
DRAWN <i>EDWIN LAI</i> DATE <i>10/10/15</i>							TITLE HDMI C/M TO HDMI C/M CABLE	
CHECKED <i>Wm C</i> DATE <i>10/10/15</i>							DWN NO. 742-20010-00300	
APPROVAL							CUSTOMER P/N:	
							SHEET 1 OF 1	
							REV	