used for: D-SUB COMBINATION

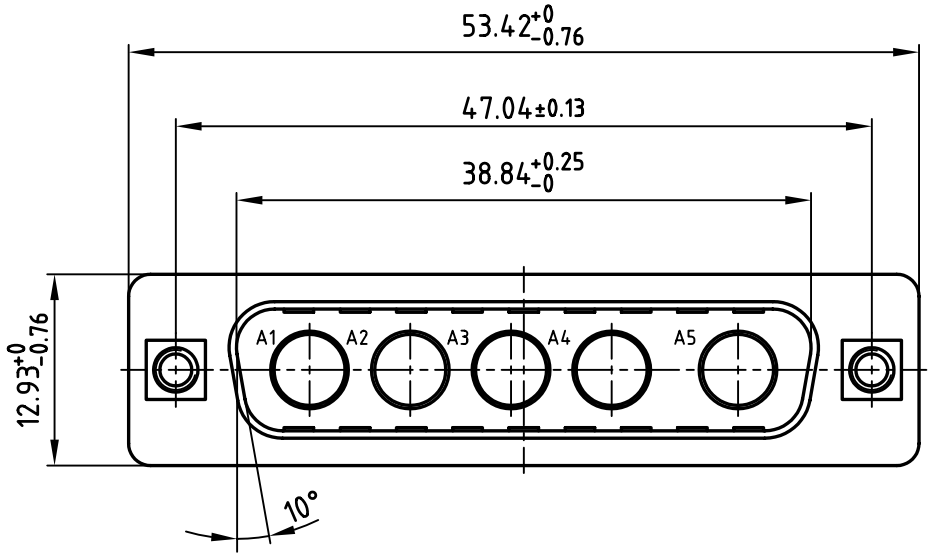

5:1

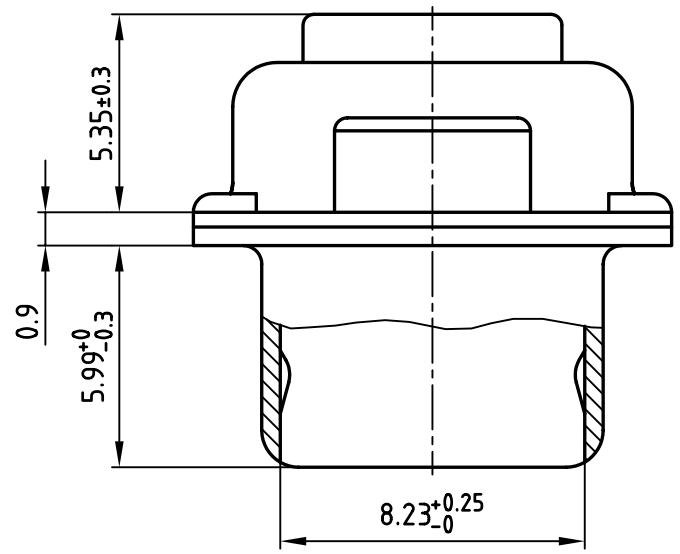

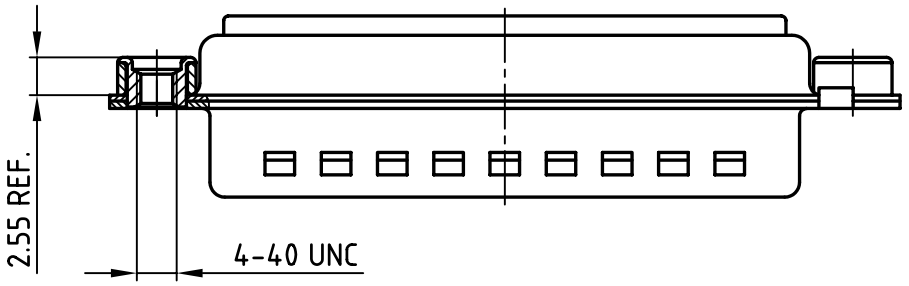



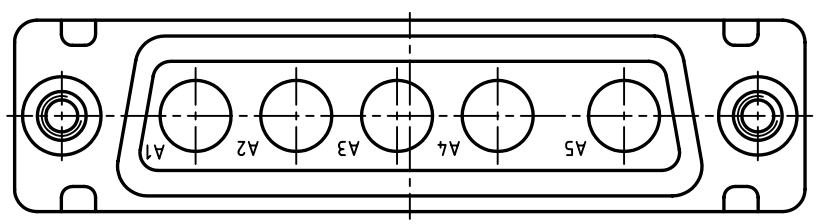

Directive 2002/95/EC „RoHS“ Compliant

NOTES:

1. METALSHELLS: STEEL; min. 320µin TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
4. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB

CFMT5W5P-K121

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

	date	name
2000		
drawn	05.10.	Parei
appd.	05.10.	Schrader
norm		
d-old		

scale: 2:1 (5:1)

material: SEE NOTES

title:
D-SUB COMBINATION MALE
5W5P
WITHOUT CONTACTS

dwg no: 13K1A093A

AutoCAD 2000 | DIN-A 3 | sh: 1/1

product no: 3005W5PXX99A30X