


## S23F1C-P15PJH0-030S series\_f, type\_s2



### General information

Part number	S23F1C-P15PJH0-030S
Termination	crimp
Size	3
Locking principle	push
Coding	1_halfshell
Cable Diameter	cable_mini_03
Cable outlet	bend_relief

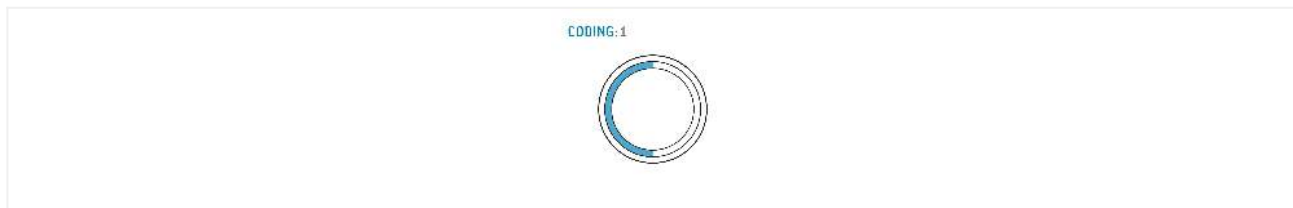

### Contact insert description

Number of contacts	15
Contact type	pins
Contact diameter	09mm
Insulator material	peek
Wire cross section	20-24_awg
Termination	crimp

reverse\_gender\_on\_request

### Technical information

Max. creepage and air clearance distance	12_mm	08_mm
Nominal current single contact	10_a	iec_60512_5_2
Nominal current insert	5 A	vde_0298_4
Test voltage	1_kv_ac	saе_13441

safety\_text

### Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated\_unmated

## Material and surface treatments

<b>Housing</b>	m_chrome
<b>Contact</b>	cu_alloy_gold

safety\_text\_2  
ul\_text  
illustrative\_text