

**Ratings**

Voltage: 300 V  
 Temperature: -80~200 °C  
 Flammability: VW-1  
 Oil resistance: 60 °C  
 ≥50% elongation and tensile strength after aging

**Conductor**

Conductor count: 1  
 Gauge: 14 AWG 2.04 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.37mm x 19  
 Resistance at 20 °C: 8.96 Ω /km max


**Insulator**

Material: Fluorinated ethylene propylene (FEP)  
 Color: black  
 Diameter: Ø 2.51 ± 0.1  
 Nominal thickness: 0.33 mm  
 Resistance at 20 °C: 2.5 MΩ /kft min

**Wire marking:** E339579 UL AWM STYLE 1332 14AWG 200°C 300V  
 VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

**Mechanical Tests**

After aging at 232±1°C for 7 days  
 Minimum tensile strength 1.76 kgf/mm<sup>2</sup>  
 Minimum elongation 200% original

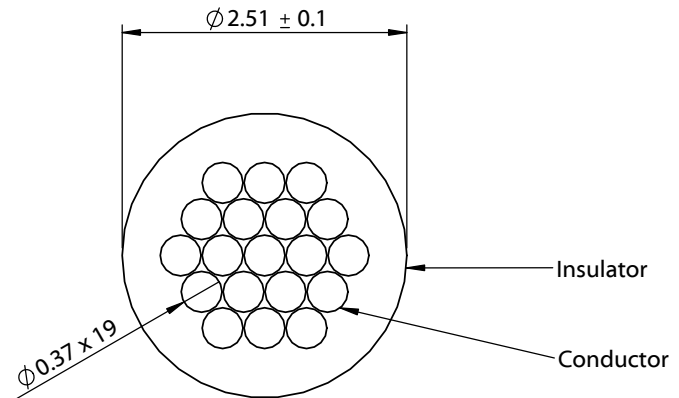

Revision:	Date:	Description:	Prepared: <b>MP</b> <small>Digitally signed By: MP Date: 2022.05.24 12:41:55 -07'00'</small>	Notes:	<b>TENSILITY</b> <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	05/20/2022	Initial release	Verified: <b>PB</b> <small>Digitally signed by PB Date: 2022.05.24 12:11:24 -07'00'</small>	RoHS compliant  Function test: no open, no short circuit, no Intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, hook-up, TS, 14 AWG, UL 1332, 300V, 200C, 2.51 mm, FEP, black	Size: A Part number: <b>30-02522</b>
					Scale: 15:1  Sheet 1 of 1

5

4

3

2

1