


CUSTOMER DRAWING

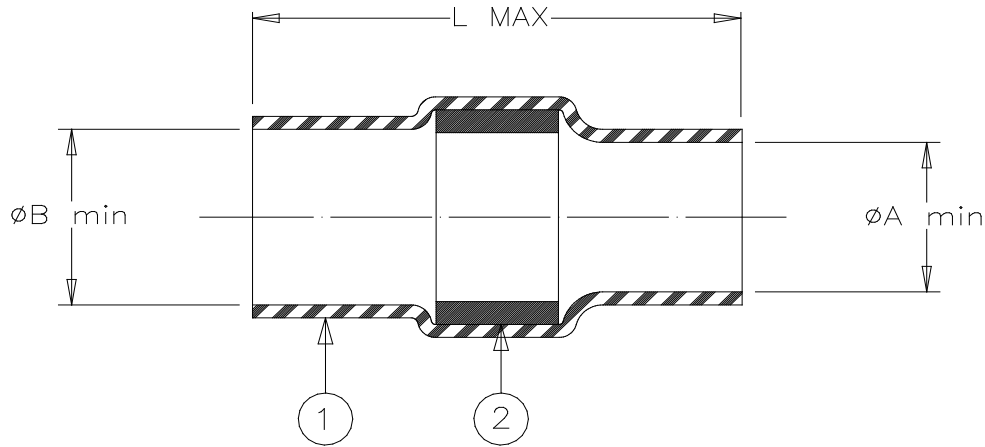

Product Revision		Product Dimensions			Cable Dimensions	
Part Name		A min	B min	L max	D max	E min
B-055-03	I	43	46	103	42	28


MATERIAL


- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Cd18 per ANSI J-STD-006.
 FLUX: TYPE ROM1 per ANSI J-STD-004.

APPLICATION

- This controlled soldering device is designed for termination of a tin plated or bare copper shield on a cable having an insulation rated for at least +85°C.
- Temperature range: -55°C to +125°C.

For best results, prepare the cable as shown:

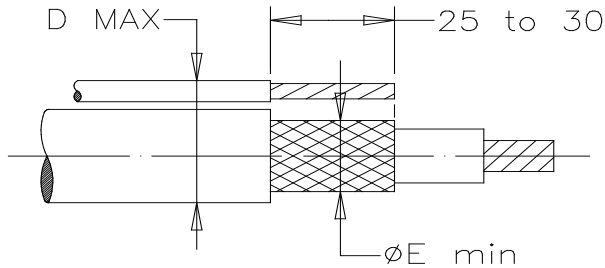

		Raychem Devices	TITLE: SHIELD TERMINATION LOW TEMPERATURE				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.			DOCUMENT NO.: B-055-03				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: ECO-16-009232	REPLACES: B05503			
DRAWN BY: R. MAPALO	DATE: 15-Oct-98	REV.: SEE TABLE	DOC ISSUE: C1	SCALE: NONE	SIZE: A	SHEET: 1 of 1	