

## General Description

The TMR2003 linear sensor utilizes a unique push-pull Wheatstone bridge composed of four TMR sensor elements. The TMR2003 is available in a 3 mm X 3 mm X 1.45 mm SOT23-5 package.

## Features and Benefits

- Tunneling Magneto resistance (TMR) Technology
- High Sensitivity
- Low Power Consumption
- Excellent Thermal Stability
- Compatible with Wide Range of Supply Voltages
- No need for set/reset calibration

## Applications



- Weak Magnetic Field Sensing
- Current Sensors
- Position and Displacement Sensing



TMR2003


## Transfer Curve

The following figure shows the response of the TMR2003 to an applied magnetic field in the range of  $\pm 5$  Oe and  $\pm 200$  Oe when the TMR2003 is biased at 1V.

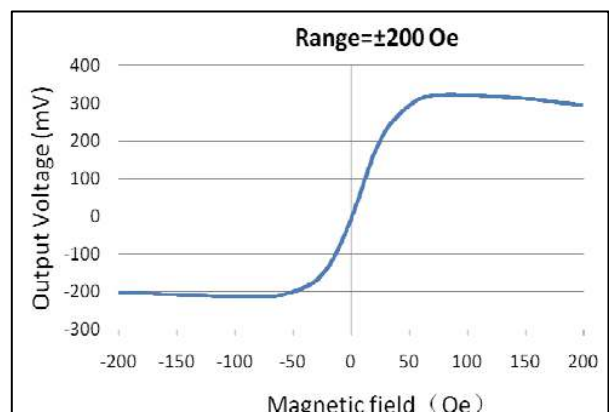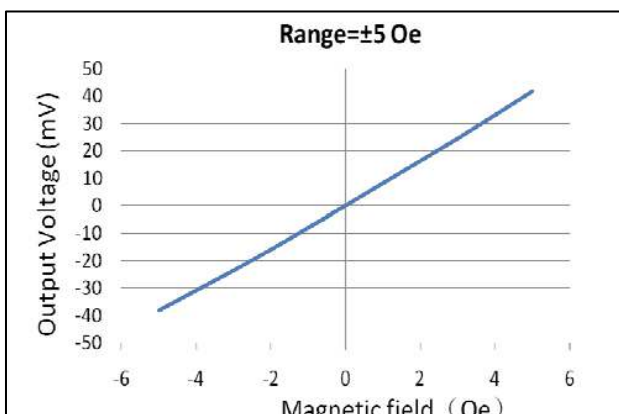

## Pin Configuration

(Arrow indicates direction of applied field that generates a positive output voltage.)

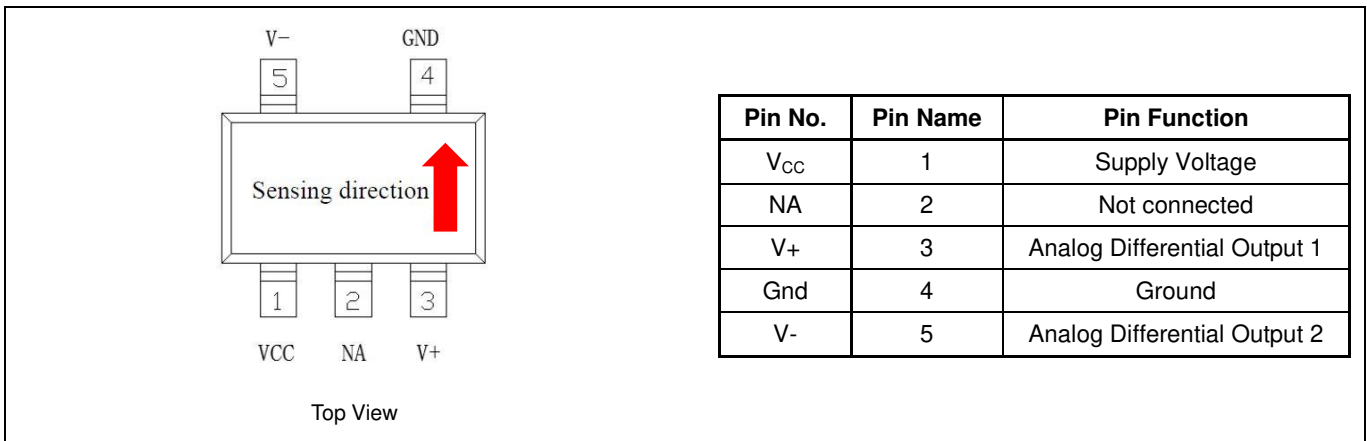

## Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Supply Voltage	V <sub>CC</sub>	7	V
Reverse Supply Voltage	V <sub>RCC</sub>	7	V
Max Exposed Field	H <sub>E</sub>	4000	Oe <sup>(1)</sup>
ESD Voltage	V <sub>ESD</sub>	4000	V
Operating Temperature	T <sub>A</sub>	-40~125	°C
Storage Temperature	T <sub>stg</sub>	-50 ~150	°C

## Specification (V<sub>CC</sub>=1.0V, T<sub>A</sub>=25°C, Differential Output)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	V <sub>CC</sub>	Operating		1	7	V
Supply Current	I <sub>CC</sub>	Output Open		18 <sup>(2)</sup>		μA
Resistance	R			56		kOhm
Sensitivity	SEN	Fit @±5Oe		6		mV/V/Oe
Saturation Field	H <sub>sat</sub>		-35		55	Oe
Non-Linearity	NONL	Fit @±5Oe		1		%FS
Offset Voltage	V <sub>offset</sub>		-30		30	mV/V
Hysteresis	Hys	Fit @±5Oe		0.4		Oe
Temperature Coefficient of Resistance	TCR	H = 0 Oe		-620		PPM/°C
Temperature Coefficient of Sensitivity	TCS			-1100		PPM/°C


Notes:

(1) 1 Oe (Oersted) = 1 Gauss in air = 0.1 millitesla = 79.8 A/m.


(2) Custom sensor resistance may be available upon request.

## Package Information

SOT23-5L package

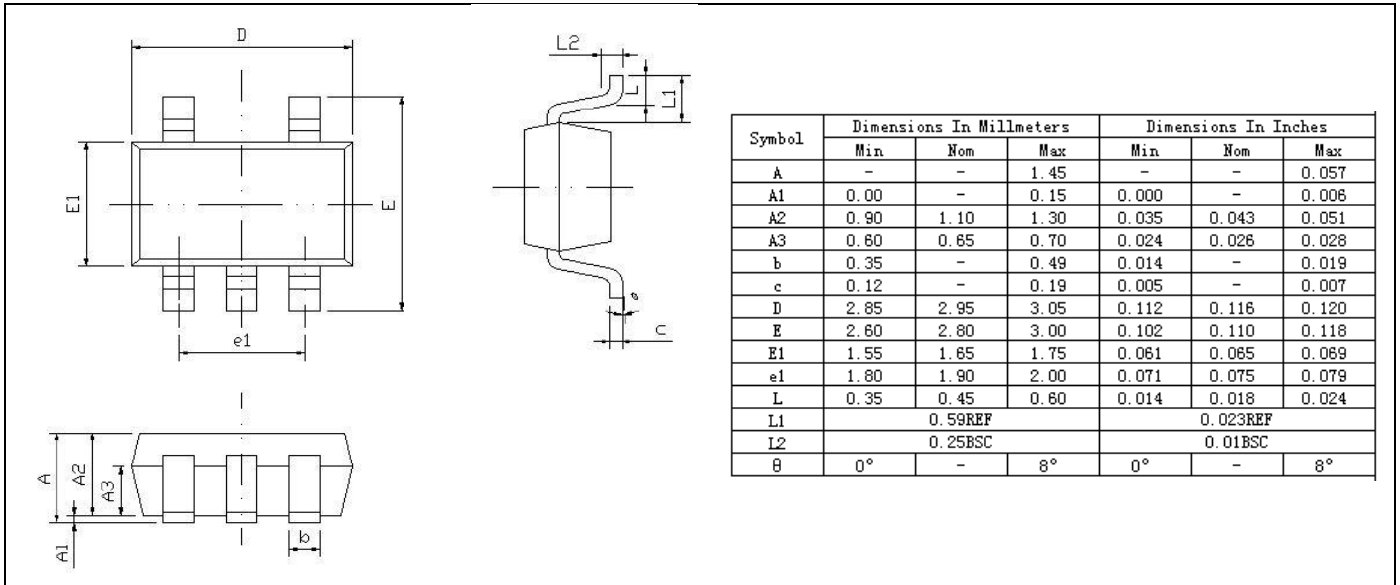

## TMR Sensor Position

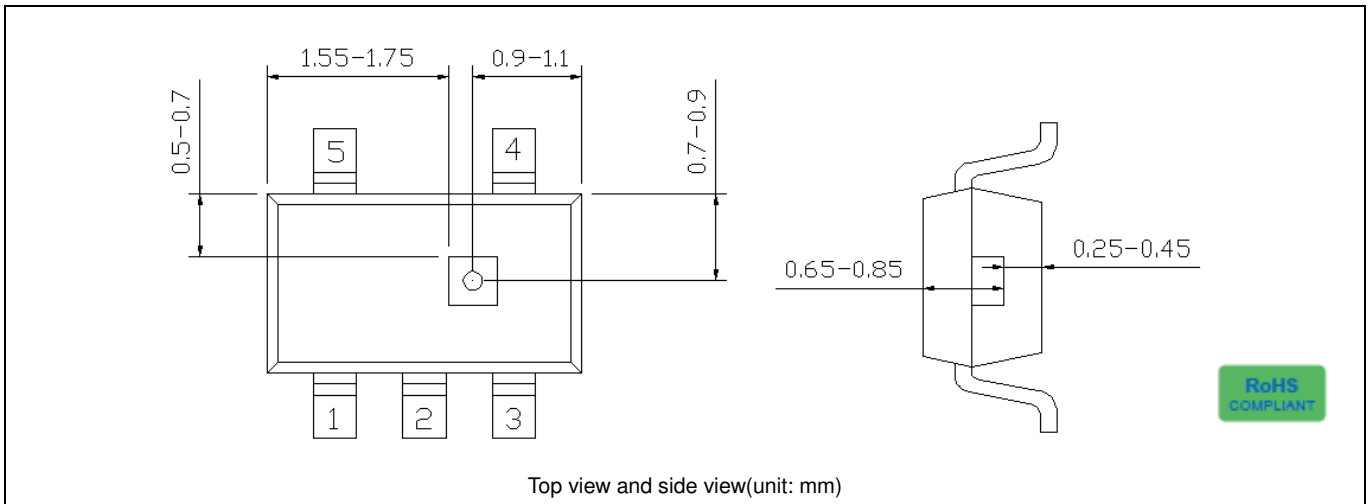



**MultiDimension Technology Co., Ltd.**

Address: No.7 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, 215634, China

Web: [www.dowaytech.com/en](http://www.dowaytech.com/en)

Email: [info@dowaytech.com](mailto:info@dowaytech.com)

The information provided herein by MultiDimension Technology Co., Ltd. (hereinafter MultiDimension) is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. MultiDimension reserves the right to make changes to product specifications for the purpose of improving product quality, reliability, and functionality. MultiDimension does not assume any liability arising out of the application and use of its products. MultiDimension's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify MultiDimension for any damages resulting from such applications.