MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-ENCLOSED

2ML1 5

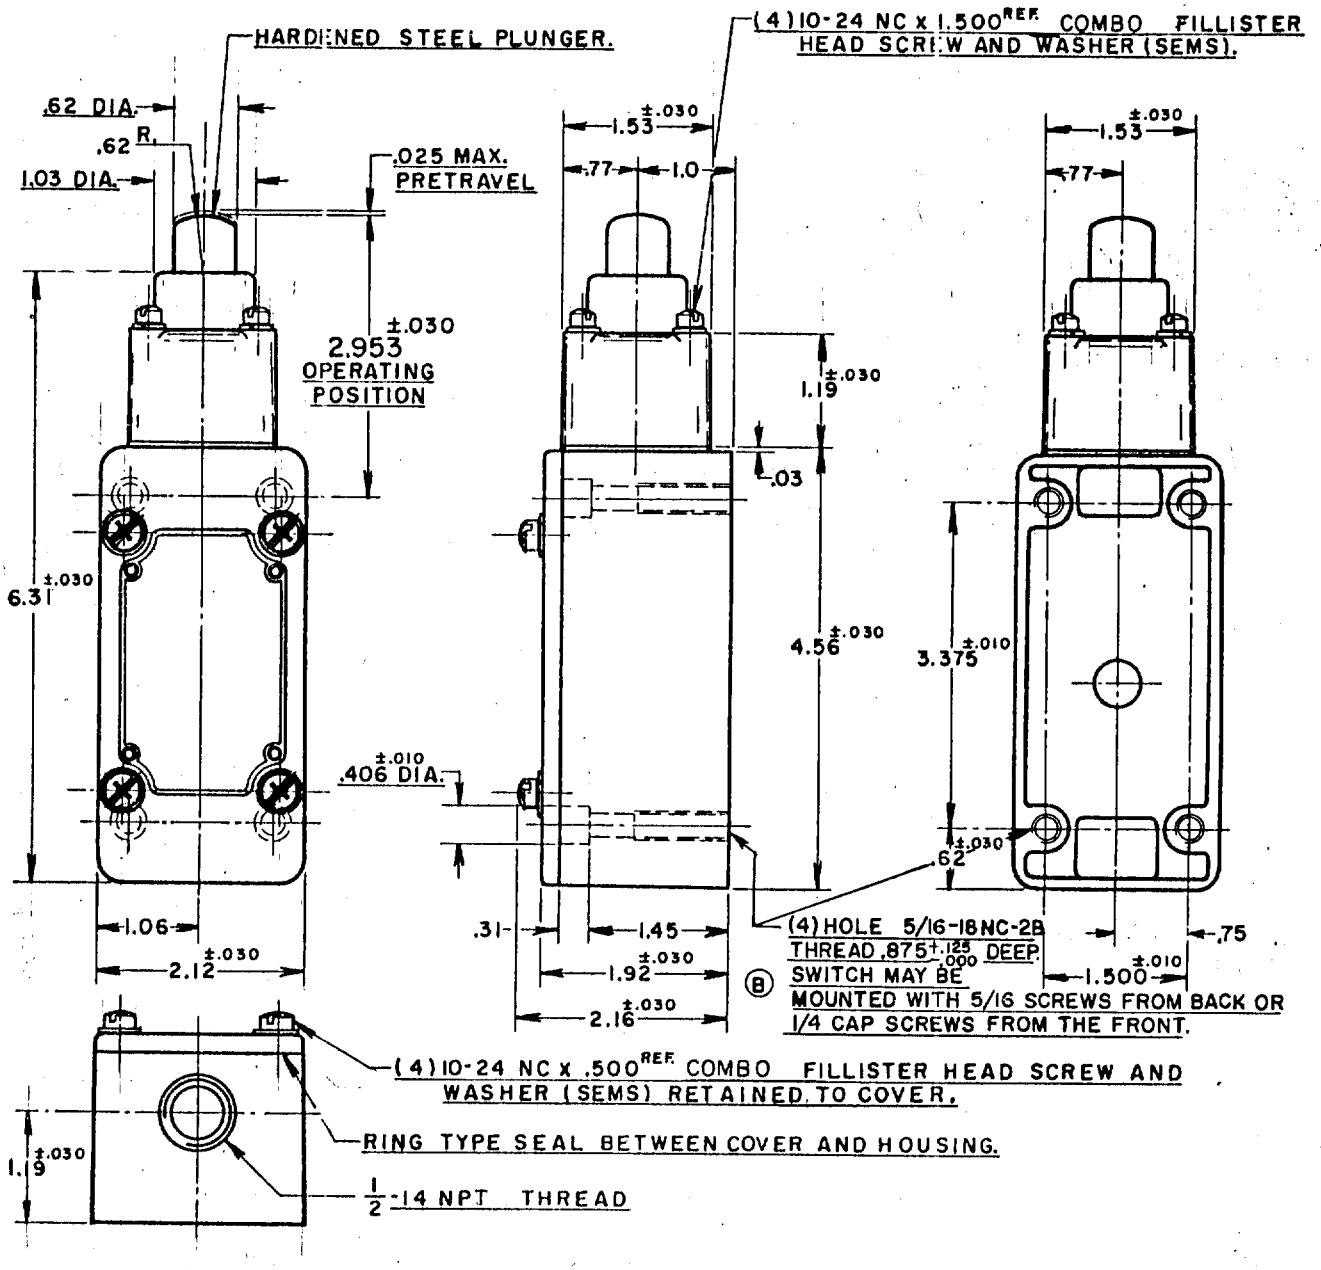

NOTE-

1-IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT.
2-SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 30° F.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS (TENTATIVE)

OPERATING FORCE	6 LBS. APPROX.
RELEASE FORCE	4 LBS. APPROX.
DIFFERENTIAL TRAVEL	.005 MAX.
OVERTRAVEL	.500 MIN.
SWITCH-BASIC REPLACEMENT	MKI

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
S.P.D.T.	

20A-120,240,480 OR 600 VAC; 3/4 HP-120 VAC; 1 1/2 H.P.-240 VAC; 1/2 A-115 VDC; 1/4 A-230 VDC
PILOT DUTY RATING: 600 VAC MAX.

SCALE 1/2 TO 1
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

(M) 2ML1 ISSUE 5 | REPLACES | RELEASE NO. | CHECK | ENT 19 OCT 56 | CHECK | J.U.M. 13 OCT 56 | CHECK | G.C.H. 24 OCT. 56 | CHECK | DRAWN R.L.Z. 12 OCT. 56