## Product data sheet Characteristics

### **HMIZSURDP5**

Remote control cable, Harmony SCU, 5 m for panel



#### Main

Range of Product	Harmony SCU
Product or Component Type	Remote control cable

### Complementary

Cable length	16.40 ft (5 m)	
--------------	----------------	--

### Ordering and shipping details

Category	22569 - MAGELIS XBT-GT (AND XBT-G)	
Discount Schedule	MC2	
GTIN	3606480564673	
Nbr. of units in pkg.	1	
Package weight(Lbs)	30.69 oz (870 g)	
Returnability	No	
Country of origin	CN	

### **Packing Units**

PCE	
2.83 in (7.2 cm)	
7.24 in (18.4 cm)	
10.51 in (26.7 cm)	
S03	
6	
11.95 lb(US) (5.42 kg)	
11.81 in (30 cm)	
11.81 in (30 cm)	
15.75 in (40 cm)	
PAL	
48	
95.59 lb(US) (43.36 kg)	
27.56 in (70 cm)	
23.62 in (60 cm)	
31.50 in (80 cm)	
	2.83 in (7.2 cm) 7.24 in (18.4 cm) 10.51 in (26.7 cm) S03 6 11.95 lb(US) (5.42 kg) 11.81 in (30 cm) 11.81 in (30 cm) 15.75 in (40 cm) PAL 48 95.59 lb(US) (43.36 kg) 27.56 in (70 cm) 23.62 in (60 cm)


### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	<sup>™</sup> REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS  Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	₫Yes
China RoHS Regulation	China RoHS Declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

# Product data sheet Dimensions Drawings

## **HMIZSURDP5**


### **Dimensions**

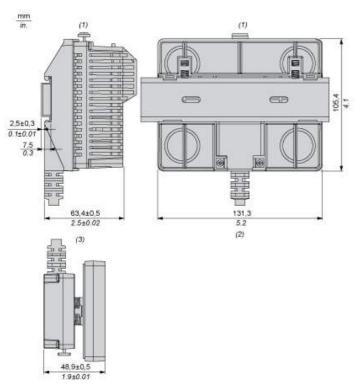



- (1) Rear module
- (2) Rear module remote cable
- (3) Panel remote cable

### **HMIZSURDP5**

### Recommended Mounting position









- (1) (2) Horizontal mounting
- Vertical mounting

### No Recommended Mounting Position



### Clearance

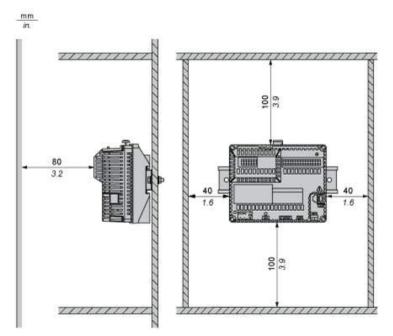

Keep adequate spacing for proper ventilation to maintain an ambient temperature between 0...50 °C (32...122 °F) for horizontal installation and 0...40 °C (32...104 °F) for vertical installation.