


# IGBT Module

## Single switch

Short Circuit SOA Capability  
Square RBSOA

$I_{C80} = 1800 \text{ A}$   
 $V_{CES} = 1700 \text{ V}$   
 $V_{CE(sat) \text{ typ.}} = 2.3 \text{ V}$

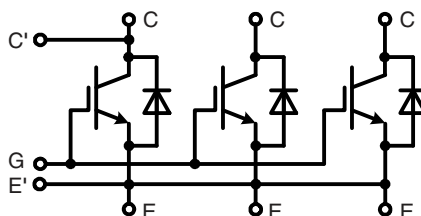

### IGBT

Symbol	Conditions	Maximum Ratings		
$V_{CES}$ V	$V_{GE} = 0 \text{ V}$	1700		
$V_{GES}$ V		$\pm 20$		
$I_{C80}$ A	$T_C = 80^\circ\text{C}$	1800		
$I_{CM}$ A	$t_p = 1 \text{ ms}; T_C = 80^\circ\text{C}$	3600		
Symbol	Conditions	Characteristic Values		
$t_{SC}$ $\mu\text{S}$	$V_{CC} = 1000 \text{ V}; V_{CEM \text{ CHIP}} = \leq 1700 \text{ V};$ ( $T_{VJ} = 25^\circ\text{C}$ , unless otherwise specified)	<b>min.</b>	<b>typ.</b>	<b>max.</b>
$V_{CE(sat)}^*$	$V_{GE} \leq 15 \text{ V}; T_{VJ} \leq 125^\circ\text{C}$ $I_C = 1800 \text{ A}; V_{GE} = 15 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.3	2.6	V
$V_{GE(th)}$	$I_C = 240 \text{ mA}; V_{CE} = V_{GE}$	4.5		6.5 V
$I_{CES}$	$V_{CE} = 1700 \text{ V}; V_{GE} = 0 \text{ V}; T_{VJ} = 125^\circ\text{C}$			120 mA
$I_{GES}$	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}; T_{VJ} = 125^\circ\text{C}$			500 nA
$t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $E_{on}$ $E_{off}$	Inductive load; $T_{VJ} = 125^\circ\text{C};$ $V_{GE} = \pm 15 \text{ V}; V_{CC} = 900 \text{ V};$ $I_C = 1800 \text{ A}; R_G = 0.82 \Omega;$ $L_\sigma = 60 \text{ nH}$	285		ns
		230		ns
		950		ns
		240		ns
		530		mJ
		670		mJ
$C_{ies}$ $C_{oes}$ $C_{res}$		$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$	166	
	16.5			nF
	7.0			nF
$Q_{ge}$	$I_C = 1800 \text{ A}; V_{CE} = 900 \text{ V}; V_{GE} = \pm 15 \text{ V}$	15.1		$\mu\text{C}$
$R_{thJC}$				0.009 K/W

### Features

- NPT<sup>3</sup> IGBT
- Low-loss
- Smooth switching waveforms for good EMC
- Industry standard package
- High power density
- AISiC base-plate for high power cycling capacity
- AlN substrate for low thermal resistance

### Typical Applications

- AC power converters for
  - industrial drives
  - windmills
  - traction
- LASER pulse generator

\* Collector emitter saturation voltage is given at chip level

**Diode**

Symbol	Conditions	Maximum Ratings	
$I_{F80}$	$T_C = 80^\circ\text{C}$	1800	A
$I_{FSM}$	$V_R = 0\text{ V}; T_{VJ} = 125^\circ\text{C}; t_p = 10\text{ ms};$ half-sinewave	16500	A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$V_F$ *	$I_F = 1800\text{ A}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.65		2.0 V
		1.70		V
$I_{RM}$ $t_{rr}$ $Q_{RR}$ $E_{rec}$	$V_{CC} = 900\text{ V}; I_C = 1800\text{ A};$ $V_{GE} = \pm 15\text{ V}; R_G = 1.5\ \Omega; T_{VJ} = 125^\circ\text{C}$ Inductive load; $L_\sigma = 60\text{ nH}$	1470		A
		870		ns
		770		$\mu\text{C}$
		530		mJ
$R_{thJC}$				0.017 K/W

\* Forward voltage is given at chip level

**Module**

Symbol	Conditions	Maximum Ratings	
$T_{JM}$	max. junction temperature	+150	$^\circ\text{C}$
$T_{VJ}$	Operating temperature	-40...+125	$^\circ\text{C}$
$T_{stg}$	Storage temperature	-40...+125	$^\circ\text{C}$
$V_{ISOL}$	50 Hz	4000	V~
$M_d$	Mounting torque	Base-heatsink, M6 screws	4 - 6 Nm
		Main terminals, M8 screws	8 - 10 Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$d_A$	Clearance distance	terminal to base	23	mm
		terminal to terminal	19	mm
$d_S$	Surface creepage distance	terminal to base	33	mm
		terminal to terminal	33	mm
$L_\sigma$	Module stray inductance, C to E terminal		10	nH
$R_{term-chip}$ *)	Resistance terminal to chip		0.085	m $\Omega$
$R_{thCH}$	per module; $\lambda$ grease = 1 W/m $\cdot$ K		0.006	K/W
<b>Weight</b>			1500	g

\*)  $V = V_{CE(sat)} + R_{term-chip} \cdot I_C$  resp.  $V = V_F + R_{term-chip} \cdot I_F$

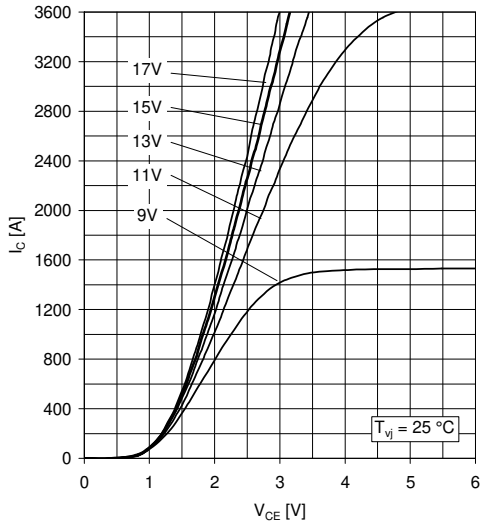


Fig. 1 Typical output characteristics, chip level

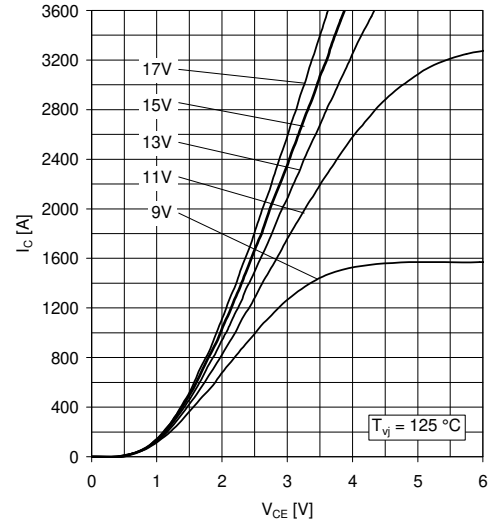


Fig. 2 Typical output characteristics, chip level

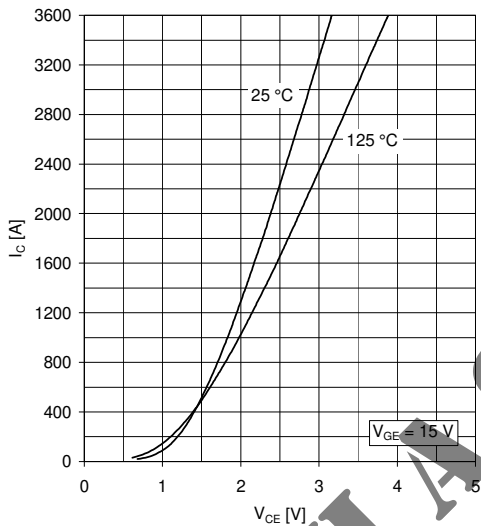


Fig. 3 Typical onstate characteristics, chip level

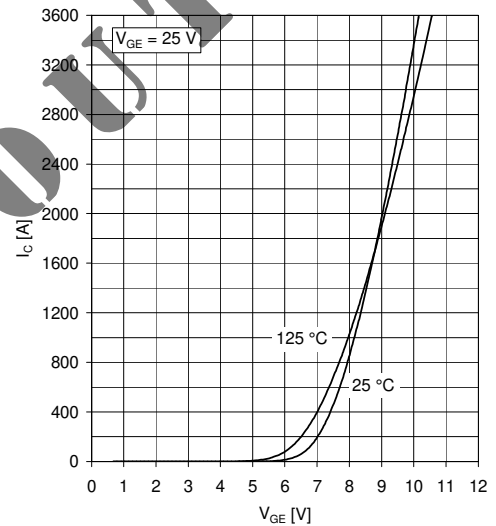


Fig. 4 Typical transfer characteristics, chip level

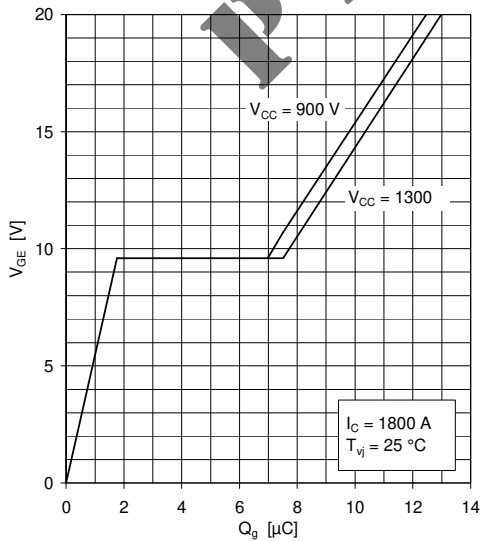


Fig. 5 Typical gate charge characteristics

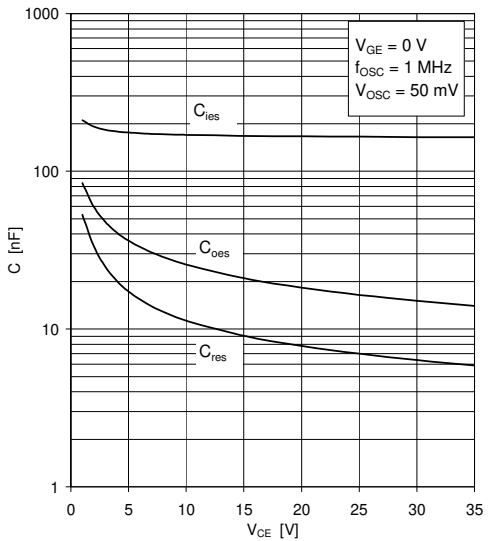


Fig. 6 Typical capacitances vs collector-emitter voltage

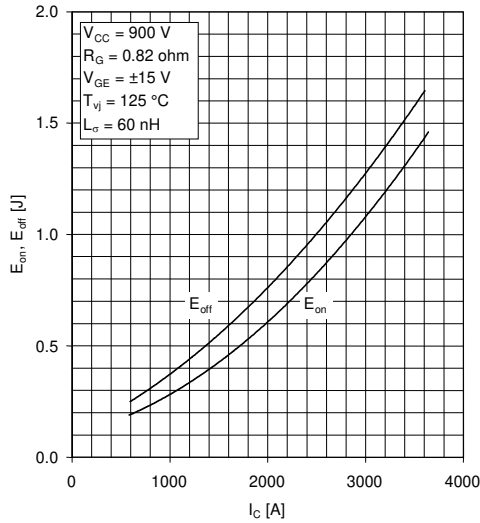


Fig. 7 Typical switching energies per pulse vs collector current

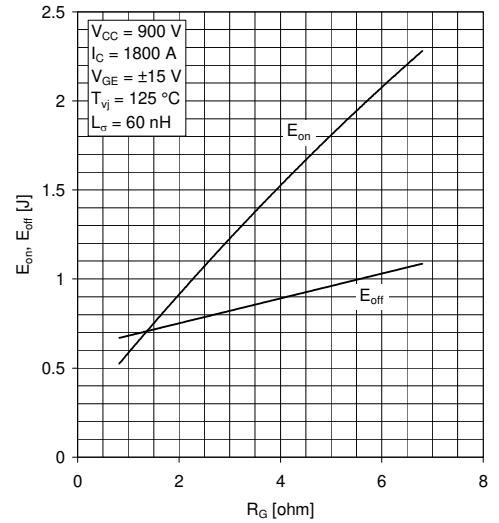


Fig. 8 Typical switching energies per pulse vs gate resistor

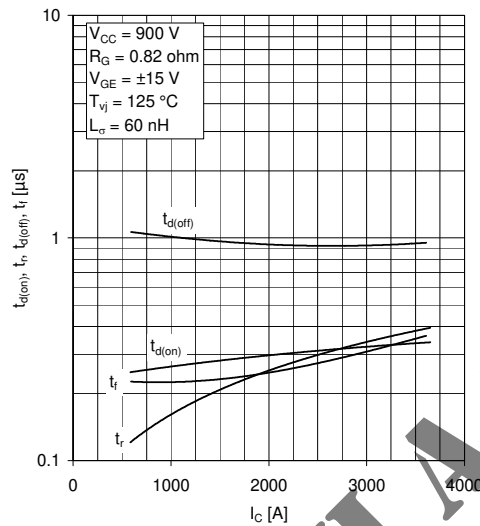


Fig. 9 Typical switching times vs collector current

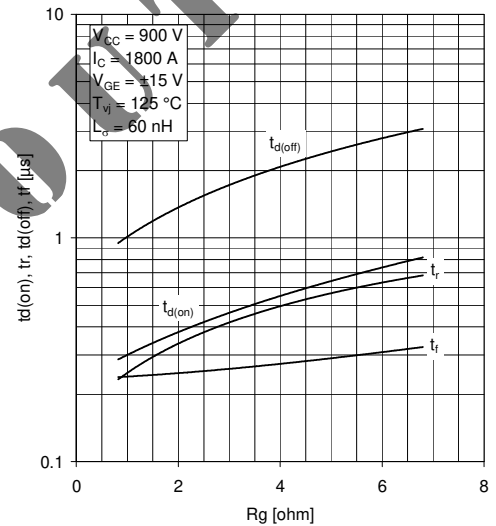


Fig. 10 Typical switching times vs gate resistor

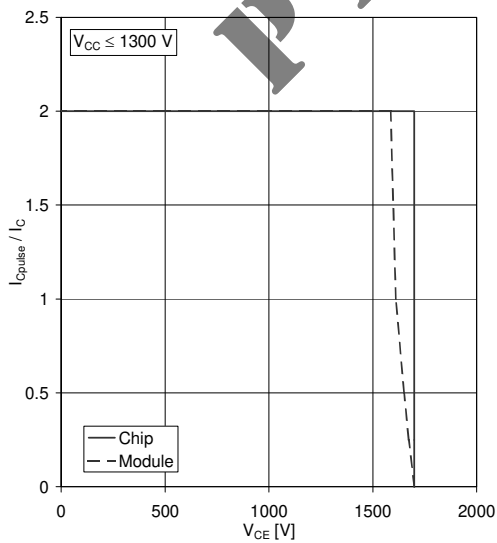


Fig. 11 Turn-off safe operating area (RBSOA)

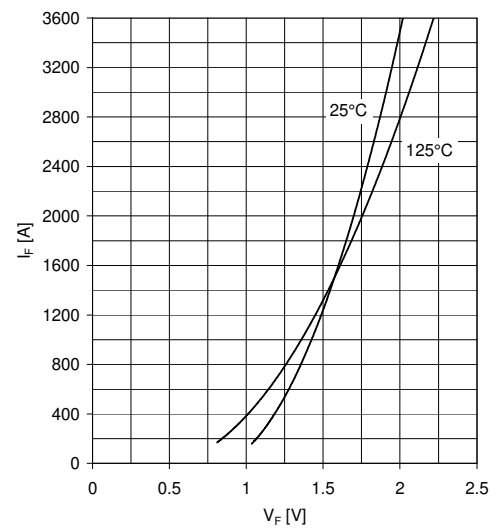


Fig. 12 Typical diode forward characteristics, chip level

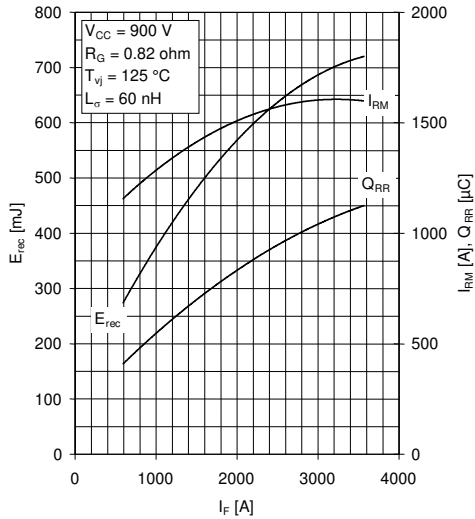


Fig. 13 Typical reverse recovery characteristics vs forward current

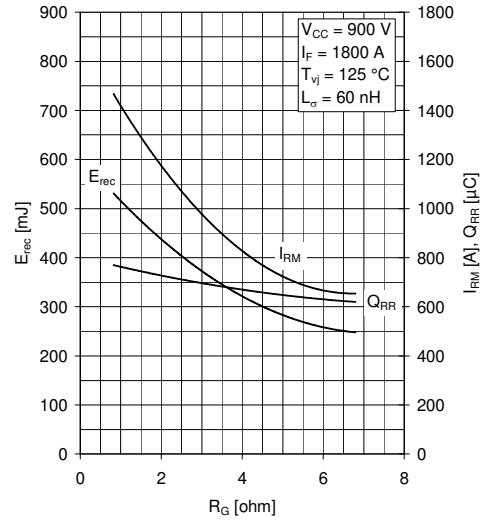


Fig. 14 Typical reverse recovery characteristics vs gate resistor


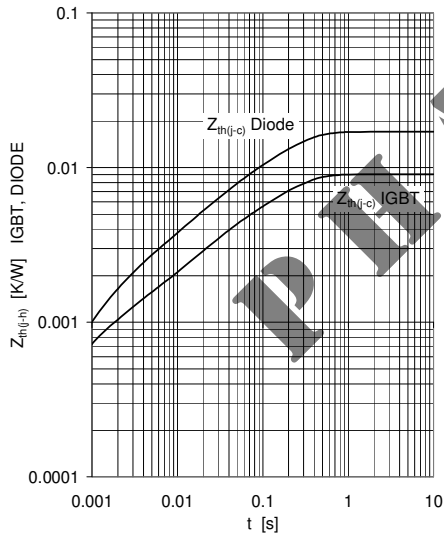


Fig. 15 Thermal impedance vs time

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

i	1	2	3	4
<b>IGBT</b> R <sub>i</sub> (K/kW)	5.97	1.99	0.619	0.465
τ <sub>i</sub> (ms)	179	22	2.4	0.54
<b>DIODE</b> R <sub>i</sub> (K/kW)	11.1	3.36	1.27	1.34
τ <sub>i</sub> (ms)	189	30	7.4	1.4

## Outline drawing

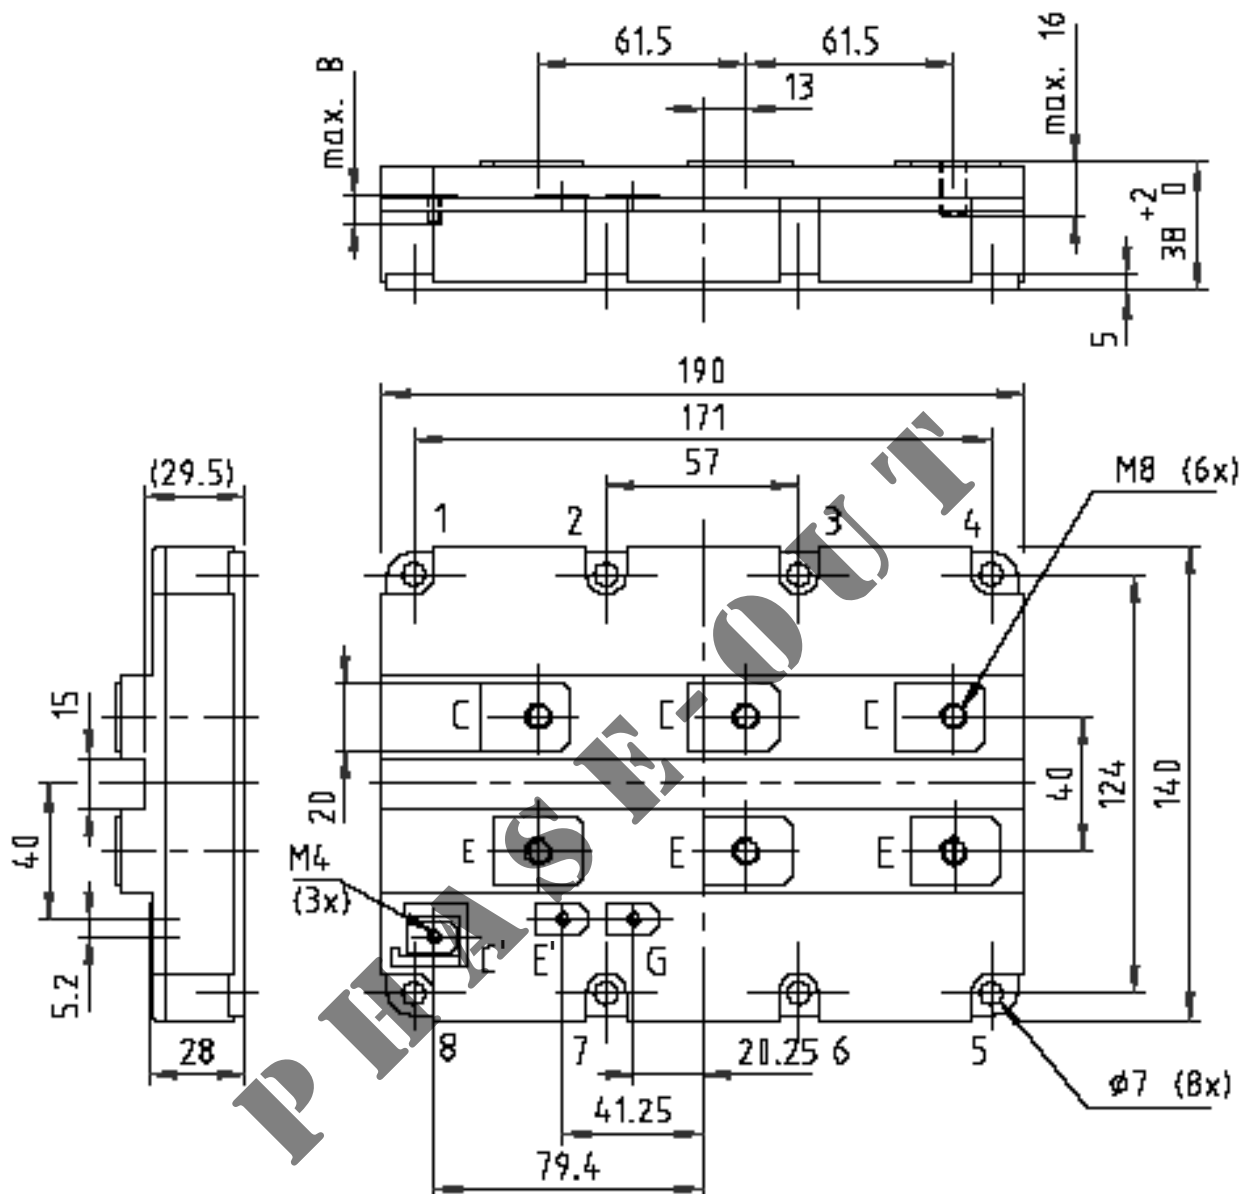

Note: all dimensions are shown in mm