292254-9 ACTIVE

AMP CT

TE Internal #: 292254-9 Connector Assembly, Plug to Plug Relay Header, Wire-to-Panel, 9 Position, .078 in [2 mm] Centerline, 1 Row, Natural, Mating Retention, Signal, AMP CT

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Connector Assembly

Connector & Housing Type: Plug to Plug Relay Header

Connector System: Wire-to-Panel

Number of Positions: 9

Centerline (Pitch): 2 mm [.078 in]

Features

E

Product Type Features

Connector Product Type	Connector Assembly	
Connector & Housing Type	Plug to Plug Relay Header	
Connector System	Wire-to-Panel	
Sealable	No	
Configuration Features		
Number of Positions	9	
Number of Rows	1	
Electrical Characteristics		
Operating Voltage	125 V	
Body Features		
Primary Product Color	Natural	
Contact Features		
Contact Retention Within Housing	Without	

Connector Assembly, Plug to Plug Relay Header, Wire-to-Panel, 9 Position, .078 in [2 mm] Centerline, 1 Row, Natural, Mating Retention, Signal, AMP CT



Mating Retention With Connector Mounting Type Panel Dusing Features Nylon Housing Material Nylon Centerline (Pitch) 2 mm[
Contact Current Rating (Max)4 AAchanical AttachmentWithoStrain ReliefWithoPanel Mount FeatureWithPanel Mount Feature TypeLatcheMating Retention TypeLockinMating Retention TypePanelConnector Mounting TypePanelHousing MaterialNylonCenterline (Pitch)2 mm[es Ig Latch
Attachment Attain Relief Panel Mount Feature Panel Mount Feature Type Aating Retention Type Atting Retention Type Connector Mounting Type Panel Susing Features Housing Material Nylon Centerline (Pitch)	es Ig Latch
Strain ReliefWithoPanel Mount FeatureWithPanel Mount Feature TypeLatcheMating Retention TypeLockinMating RetentionWithConnector Mounting TypePanelSousing FeaturesNylonCenterline (Pitch)2 mm[es Ig Latch
Panel Mount FeatureWithPanel Mount Feature TypeLatcheMating Retention TypeLockinMating RetentionWithConnector Mounting TypePanelSusing FeaturesNylonCenterline (Pitch)2 mm[es Ig Latch
Panel Mount Feature TypeLatcherMating Retention TypeLockinMating RetentionWithConnector Mounting TypePanelSousing FeaturesNylonCenterline (Pitch)2 mm[g Latch
Mating Retention Type Lockin Mating Retention With Connector Mounting Type Panel Dusing Features Nylon Centerline (Pitch) 2 mm[g Latch
Mating Retention With Connector Mounting Type Panel Dusing Features Nylon Housing Material Nylon Centerline (Pitch) 2 mm[
Connector Mounting Type Panel Dusing Features Nylon Centerline (Pitch) 2 mm[Mount
Jousing Features Housing Material Nylon Centerline (Pitch) 2 mm[Mount
Housing Material Nylon Centerline (Pitch) 2 mm[
Centerline (Pitch) 2 mm[
	66
	.078 in]
mensions	
Connector Length 21.78	mm[.857 in]
anel Thickness (Recommended) .81 – 1	.6 mm[.032 – .063 in]
Connector Height 12 mm	n[.472 in]
Connector Width 6 mm[.236 in]
age Conditions	
Operating Temperature Range -40 – 1	05 °C[-40 – 221 °F]
peration/Application	
Circuit Application Signal	
dustry Standards	
Agency/Standard CSA, l	JL
Approved Standards UL Red	cognized
JL Flammability Rating UL 94	
ckaging Features	/-0
Packaging Quantity 300	/-()
Packaging Method Bag &	/-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

Connector Assembly, Plug to Plug Relay Header, Wire-to-Panel, 9 Position, .078 in [2 mm] Centerline, 1 Row, Natural, Mating Retention, Signal, AMP CT



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Melamine (3% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series AMP CT

Connector Assembly, Plug to Plug Relay Header, Wire-to-Panel, 9 Position, .078 in [2 mm] Centerline, 1 Row, Natural, Mating Retention, Signal, AMP CT



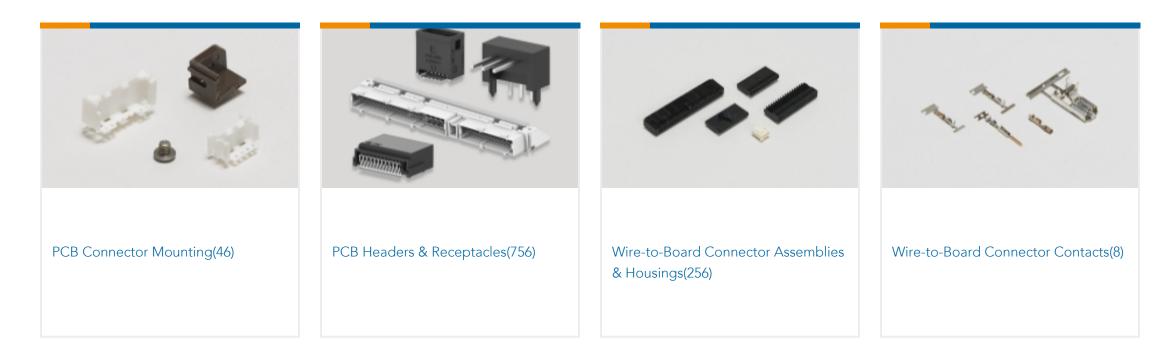

Customers Also Bought



AMP MINI D/R HDR HSG 28P NATU	AMP CT MT AMP-IN HDR-H YEL 4P	REC ASSY FOR MINI CT HYBIRD DR	1.5MM CT MT REC ASSY 13P BLACK
THE REPORT OF			
TE Part #2-353293-5 1.5MM CT MT REC ASS'Y 5P BLACK	TE Part #9-292112-1 MT REC ASSY (#26,28)		

Documents

Product Drawings CT RELAY HDR ASSY 9P NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_292254-9_D.2d_dxf.zip

Connector Assembly, Plug to Plug Relay Header, Wire-to-Panel, 9 Position, .078 in [2 mm] Centerline, 1 Row, Natural, Mating Retention, Signal, AMP CT



English

Customer View Model ENG_CVM_CVM_292254-9_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_292254-9_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

Product Specification

Japanese

Product Environmental Compliance MD_292254-9_070220182325_dmtec

English

MD_292254-9_070220182325_dmtec

English