
MODELS:

SRX42UBDPWD / SRX42UBDPWDEXP SmartRack[®] Euro-Series Deep and Wide Rack Enclosure



- Enclosures ship fully assembled for rapid deployment, but • can be knocked down for easy reassembly in confined spaces
- 1200 mm depth and 800 mm width allows extra space for cable management and hot-swap, removable power supplies
- Modular design optimized for quick configuration . and reconfiguration
- Ideal for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS

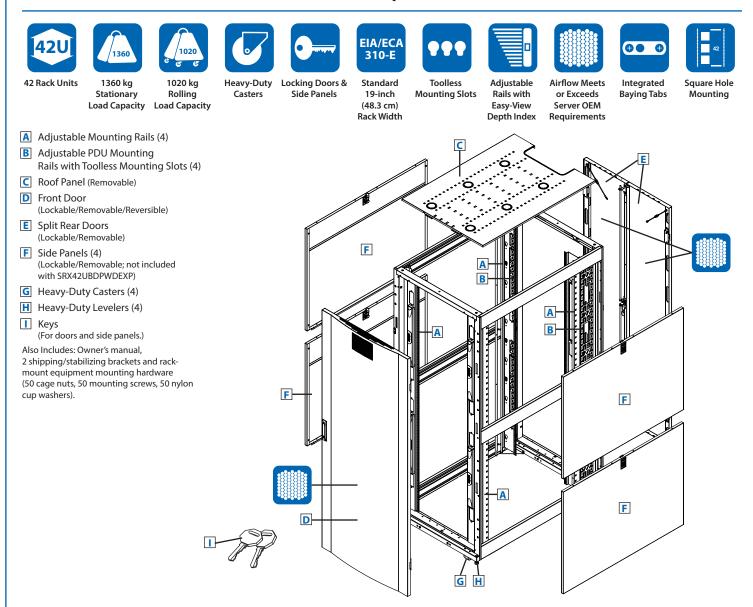

((h) us # EIA 💊 ——
Specifications	Electronic Industries Alliance
Model	SRX42UBDPWD
Rack Spaces	42U
Stationary Load Capacity	1360 kg
Rolling Load Capacity	1020 kg
Unit Dimensions (H x W x D)	1994 x 800 x 1246 mm
Shipping Dimensions (H x W x D)	2119 x 850 x 1288 mm
Unit Weight	170 kg
Shipping Weight	192 kg
Certifications	UL 60950, IP20; EIA/ECA-310-E, ETSI,
	RoHS Compliant

SRX42UBDPWDEXP

129 kg


151 kg

(Identical to SRX42UBDPWD, but without side panels)

Certi Model

Unit Weight

Shipping Weight

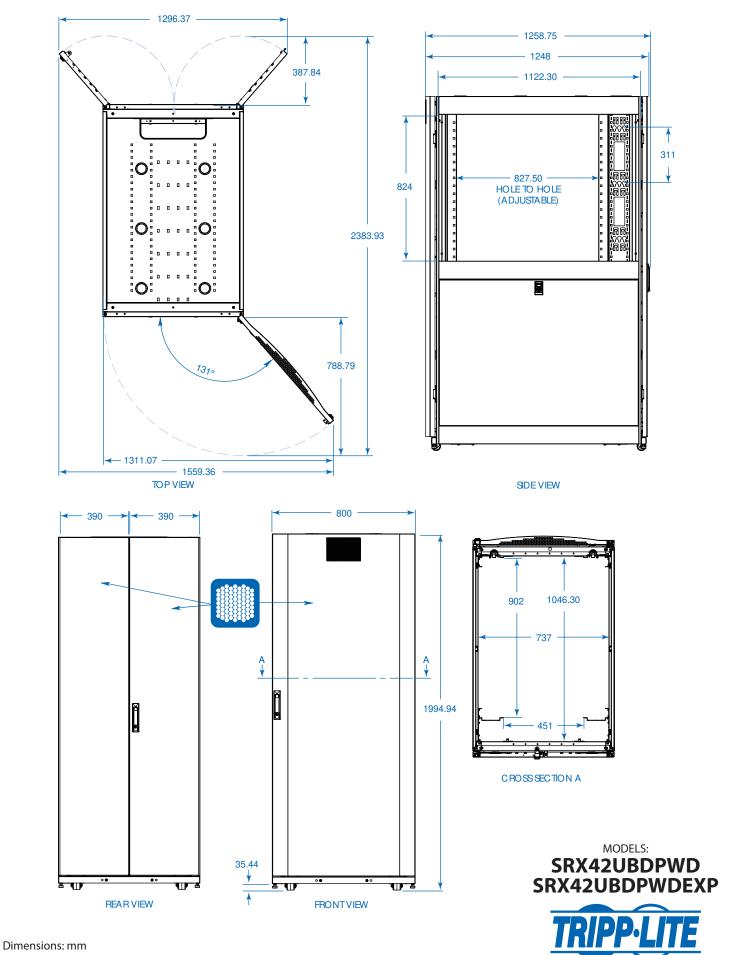

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

