

AMP Signal Double Lock

TE Internal #: 917724-2

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Printed Circuit Board, AMP

Signal Double Lock


View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors





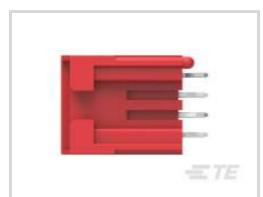





Rectangular Power Connector Type: Header

Connector & Housing Type: Plug Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 2.5 mm [.098 in]

Contact Retention Within Housing

Features

| Product Type Features | |
|--------------------------------------|-----------------------|
| Header Type | Fully Shrouded |
| Rectangular Power Connector Type | Header |
| Connector & Housing Type | Plug |
| Connector System | Wire-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features | |
| Number of Positions | 4 |
| Electrical Characteristics | |
| Operating Voltage | 250 VDC |
| Contact Features | |
| Contact Mating Area Plating Material | Tin |
| Contact Current Rating (Max) | 3 A |

Without



| Contact Type | Pin |
|--|--------------------------------------|
| PCB Contact Termination Area Plating Material | Pre-Tin |
| Contact Mating Area Plating Material Thickness | .8 – 2.5 μm[31 – 98.42 μin] |
| Termination Features | |
| Termination Method to Printed Circuit Board | Through Hole - Press-Fit |
| Mechanical Attachment | |
| Connector Mounting Type | Board Mount |
| Housing Features | |
| Centerline (Pitch) | 2.5 mm[.098 in] |
| Housing Color | Red |
| Housing Material | Nylon 66 GF |
| Usage Conditions | |
| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F] |
| Operation/Application | |
| Circuit Application | Power & Signal |
| Industry Standards | |
| UL Flammability Rating | 12mm Flame Test per Standard UL 746C |
| Glow Wire Rating | Glow Wire |
| Packaging Features | |
| Packaging Method | Bag |
| | |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |



Solder Process Capability


Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



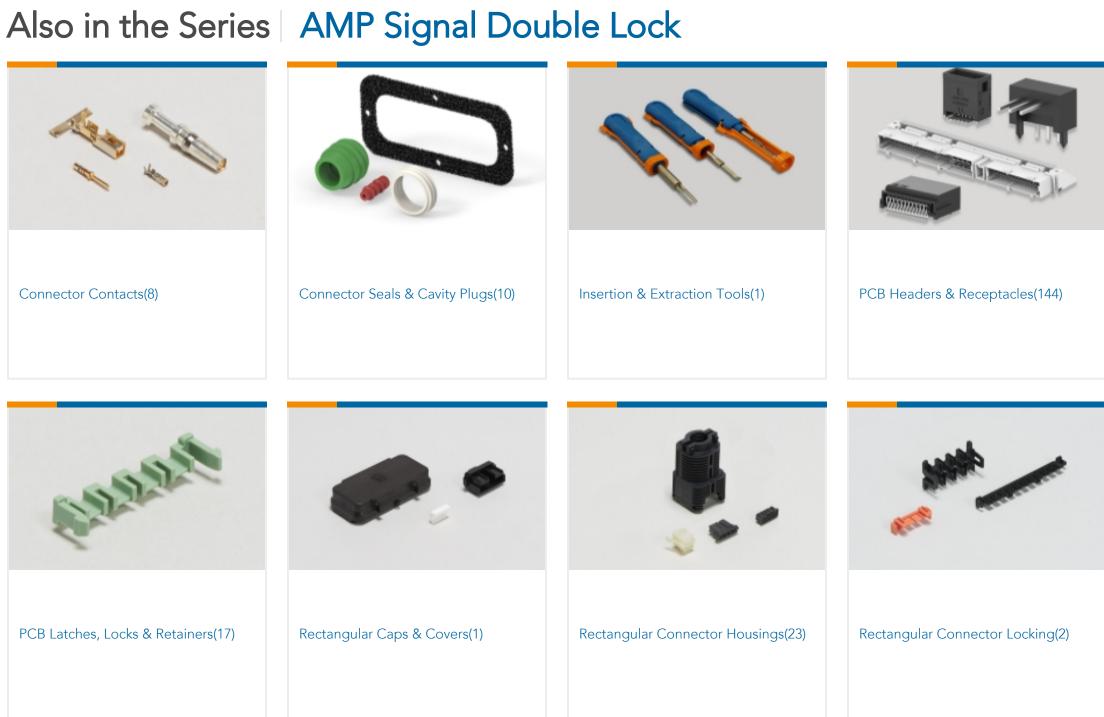





Rectangular Power Connectors(3)



Standard Rectangular Connectors(1)



Wire-to-Board Connector Assemblies & Housings(76)




Wire-to-Board Connector Contacts(6)

Customers Also Bought







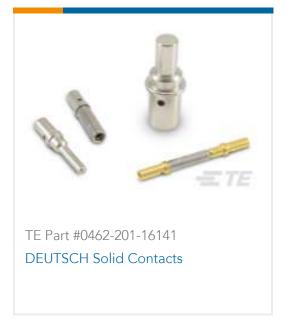







Documents

Product Drawings

2.5MM SDL 4P, HDR ASSY, HIGH, RED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_917724-2_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_917724-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_917724-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use



Datasheets & Catalog Pages

1773458-3_2.5MM_SIGNAL_DOUBLE_LOCK_CONNECTORS

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English