
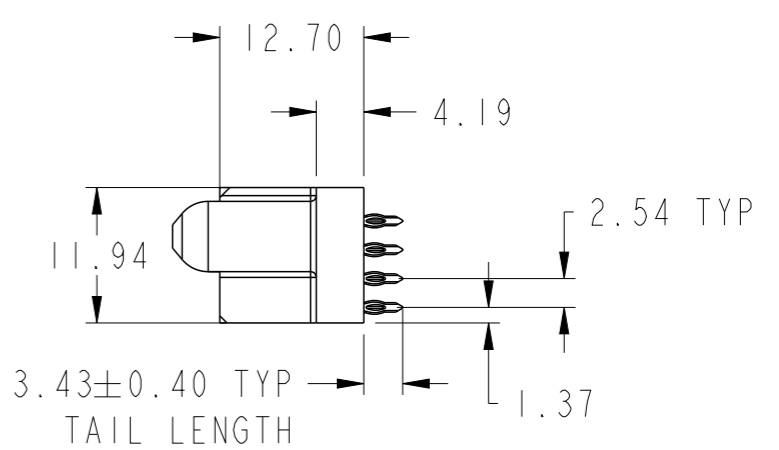
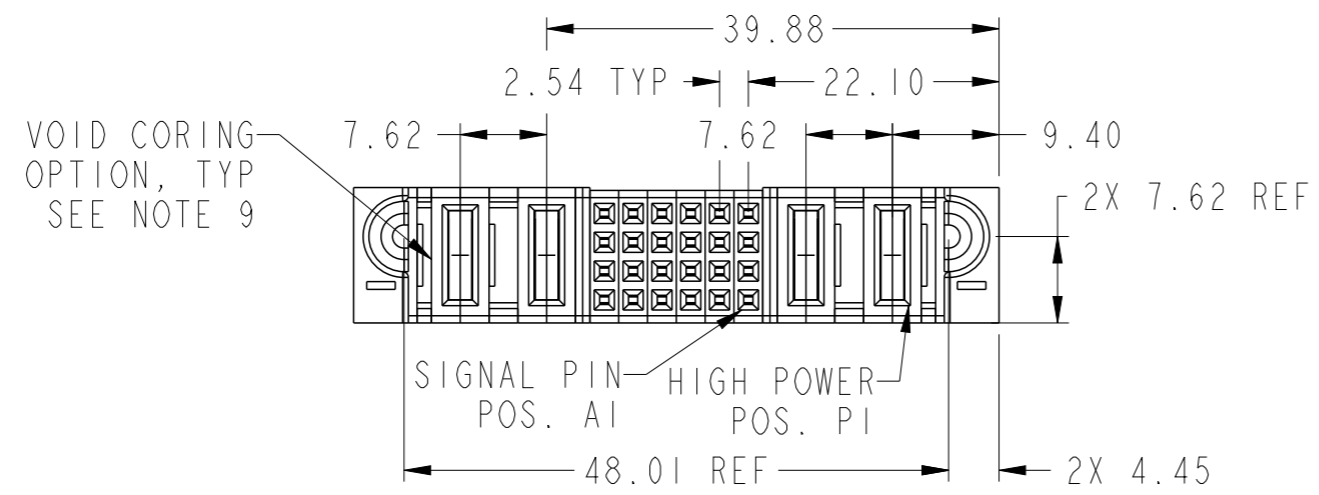
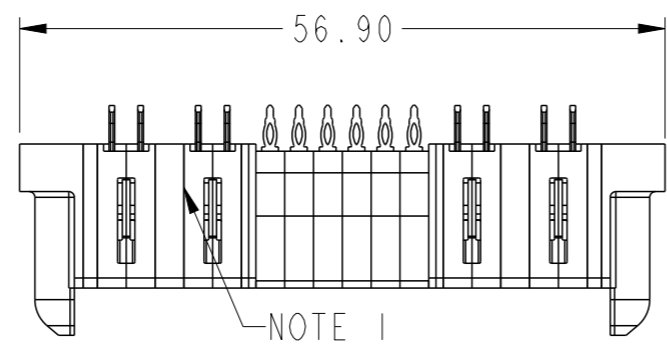


PRODUCT NUMBER SEE SHEET 2

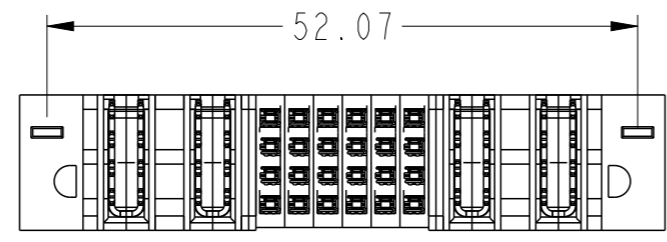


Amphenol
FCi

© 2016 AFci

spec ref		dr	Sunny2 Liu	2017/06/02	projection	MM	size	A3	scale	3:2	
tolerance std		eng	Sunny2 Liu	2017/07/04			ecn no		rel level		
ISO 406 ISO 1101		chr	Fancy Zhang	2017/07/03			-		Released		
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pei-Ming Zheng	2017/07/04	product family		PowerBlade+		-		
surface	linear	0.X		±0.5	Amphenol FCi	part no		2ACP + 24S + 2ACP		dwg no 10106123-4006001	rev A
		0.XX		±0.25		VT PF RECEPTACLE					
ISO 1302		angular	0° ±2°			cat. no.		Product - Customer Drw		sheet 1 of 3	

PRODUCT NO.	ROWS	HP		SIGNAL						HP		E2	
		E1	P4	P3	6	5	4	3	2	1	P2		P1
10106123-4006001LF	D C B A		HG	HG	F	F	F	F	F	F	HG	HG	

CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HG	STD HIGH POWER CONTACT (3.43)

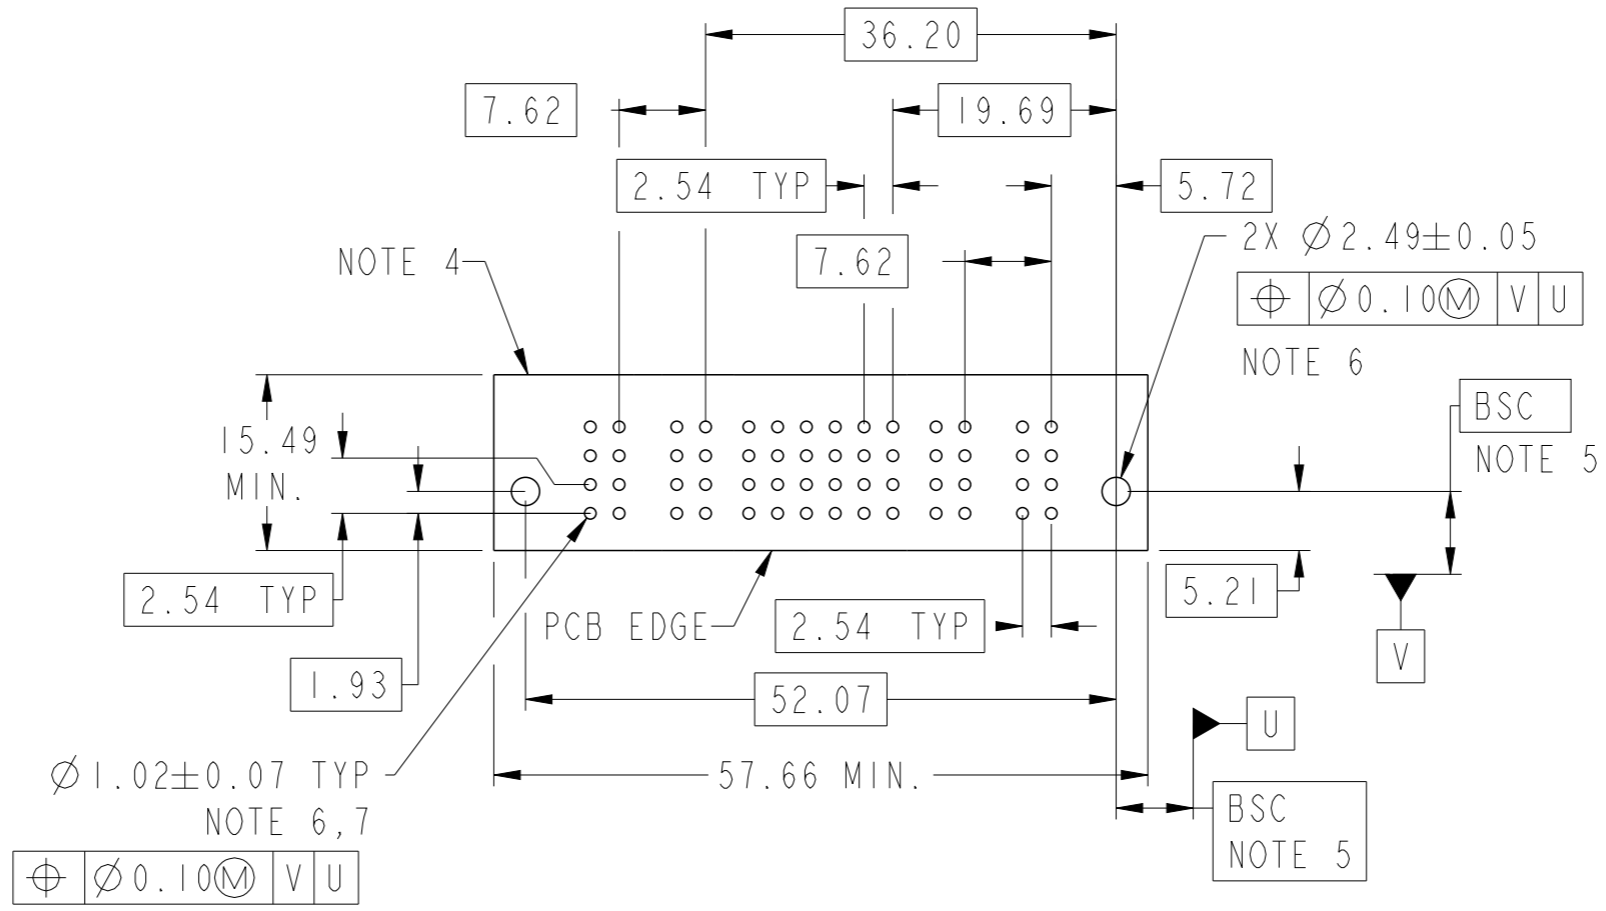

Amphenol
FCi

© 2016 AFCI

spec ref	dr	Sunny2 Liu	2017/06/02	projection	MM	size	A3	scale	3:2
tolerance std	eng	Sunny2 Liu	2017/07/04		← →	ecn no	-	rel level	Released
ISO 406 ISO 1101	chr	Fancy Zhang	2017/07/03						
surface	linear	0.X	±0.5	Amphenol FCi	2ACP + 24S + 2ACP VT PF RECEPTACLE	dwg no	10106123-4006001	rev	A
		0.XX	±0.25						
ISO 1302	angular	0°	±2°	cat. no.	Product - Customer Drw	sheet 2 of 3			

1

2

3

4

A

B

C

D

A

B

C

D

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref		dr	Sunny2 Liu	2017/06/02	projection 	MM ←→	size	A3	scale	1:1	
tolerance std		eng	Sunny2 Liu	2017/07/04			ecn no	-			
ISO 406 ISO 1101		chr	Fancy Zhang	2017/07/03			rel level	Released			
surface		appr	Pei-Ming Zheng	2017/07/04	product family	PowerBlade+	dwg no		10106123-4006001	rev	A
ISO 1302		TOLERANCES UNLESS OTHERWISE SPECIFIED		Amphenol FCi		2ACP + 24S + 2ACP VT PF RECEPTACLE		cat. no.		Product - Customer Drw	sheet 3 of 3
	linear	0.X	±0.5								
		0.XX	±0.25								
		0.XXX	±0.10								
	angular	0°	±2°								

2

3

PDS: Rev :A

STATUS:Released

Printed: Jul 04, 2017