


Ŧ	G	нт. П	m	0



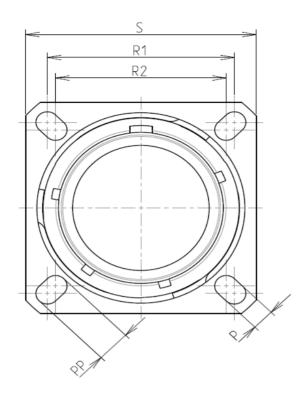



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ω

-Standard : Based on MIL-DTL-38999 Series III

<							
	-Shell Material	: Stainless Steel					
	-Shell Plating	: Nickel					
	-Insulator	: Thermoplastic					
	-Contacts	: Copper Alloy					
	-Seals & Grommet	: Silicon Elastomer					
$\sim$	-Contact Plating	: Gold over copper Alloy 0.8µm minimum					
	-Durability	: 500 Mating cycles					
	-Delivered with Souria	u contacts and Accessories					
	-Temperature Range	: -65°C to +200°C					
	-Salt Spray	: 500 hours					
	-Mass	: 25.23 g ± 10%					

	dimension
Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g

			SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
			Count FR
			PN: 8D009
	A	03-10-2016	First Release
F	ISS	DATE	Latest modification - by
	Desig	ned By:	Date:
		TITLE	Stainless St

	BASIC SERIES: 8D 0 -	09	S	98	S	Ν				SCALE	4		General Tolerar	
-	SHELL TYPE : Square Flange Receptacle									NA		$\subseteq \Psi$	±	
	CONTACT TYPE : Standard Crimp Contact							ORIE	NTATION : N	SOUR	AU	www	SOUR	AU.
	SHELL SIZE : 09						CONTACT	TYPE : SOCKET(	500 Matings)					
	PLATING : S = Nickel							CONTACT LA	YOUT : 09-98	FORMAT		I	SOUF	۱AI
								_		A3			8D0	095
•	H G				F		E		/	D		С		

	ω		A		
	R				4
S EXA	AMPLE				3
er of t adatic untry	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third part			2
		CUSTOME	R DRAWING	MOD N°	
Stee	el Recepta	cle 8D se	ries		
ar			PROJECT 59		
J.CC	DM	it mus	sument is the pro SOURIAU t not be reprodu- icated without pe	ced or	1
	DRG N° 8SN-C			SHEET	
	B		A		J

ſ	Ŧ	۵	г П	m	Ū	0	
		Contact Layout				P	anel Cutou
4	-X				Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conta positio ID A B C C Shell Arrangement Numb size no. conta 9 -98 3	X_avis (mm)  Y-axis (mm)    +.065 (1.65)  +.038 (0.97)    +.000 (0.00) 075 (1.91)   065 (1.65)  +.038 (0.97)    er of  Size    contacts  rating    location  Supersedes				ØA	ØT
ω						Dim ØA ØAA R1 ØT	
	-						
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N						PN: 8	Countr FR D0099
					A 03-10-20	016 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Stain	less Ste
<b>_</b>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOUF	RIAU.C
					FORMAT A3		JRIAU
	Н	G	F	E	D	С	

