used for: D-SUB COMBINATION

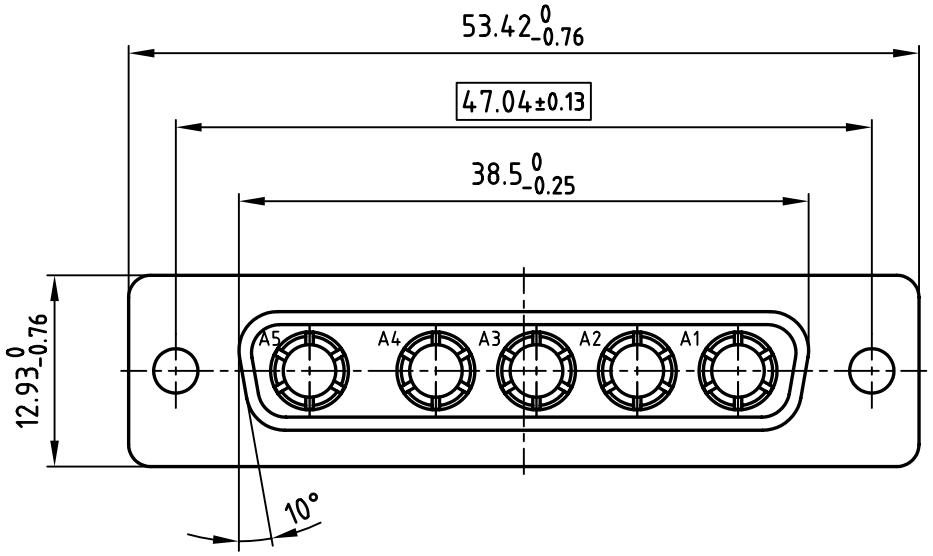

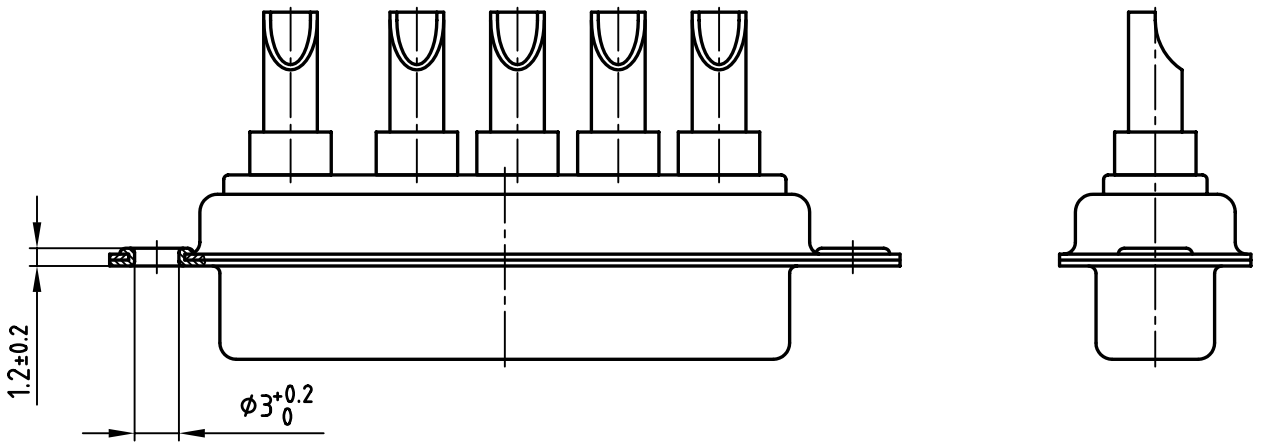

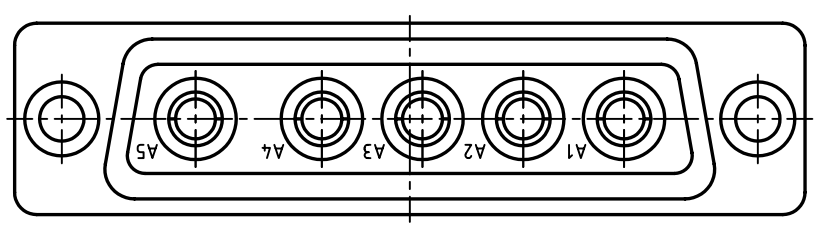

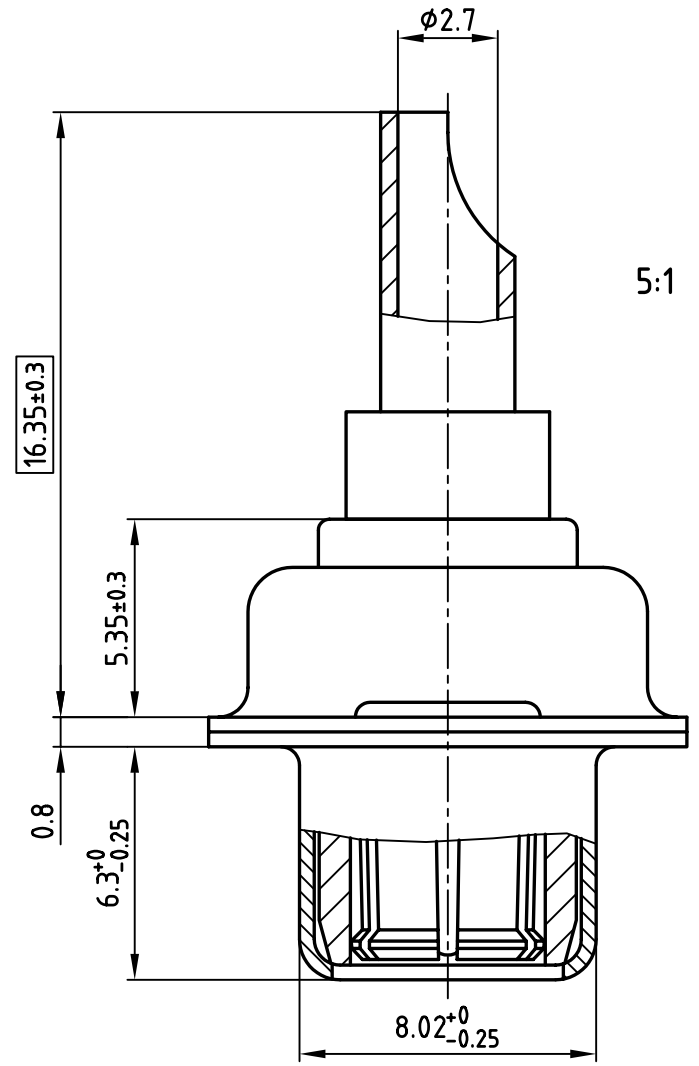

5:1

Directive 2002/95/EC „RoHS“ Compliant

NOTES:

1. METALSHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. HIGH POWER CONTACTS 20A: COPPER ALLOY
4. PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 12-14
6. [ ] = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

2001	date	name
drawn	27.11.	Parei
appd.	27.11.	Schrader
norm		
d-old		

scale: 2:1 (5:1)
material: SEE NOTES

title:
D-SUB COMBINATION FEMALE
5W5S

dwg no: 13K1A413A
AutoCAD 2000
DIN-A 3
sh: 1/1

part no: 3005W5SXX42A10X