
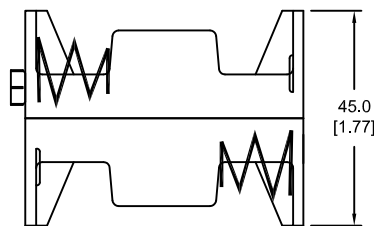
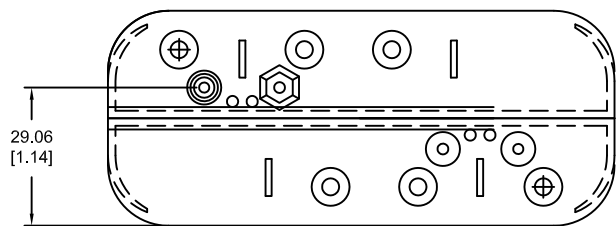



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
8/28/14	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
4/29/17	B	DIM. 106.0 WAS 105.41 DIM. 58.0 WAS 58.19 DIM. 45.0 WAS 45.46	T.B.	B.S.	

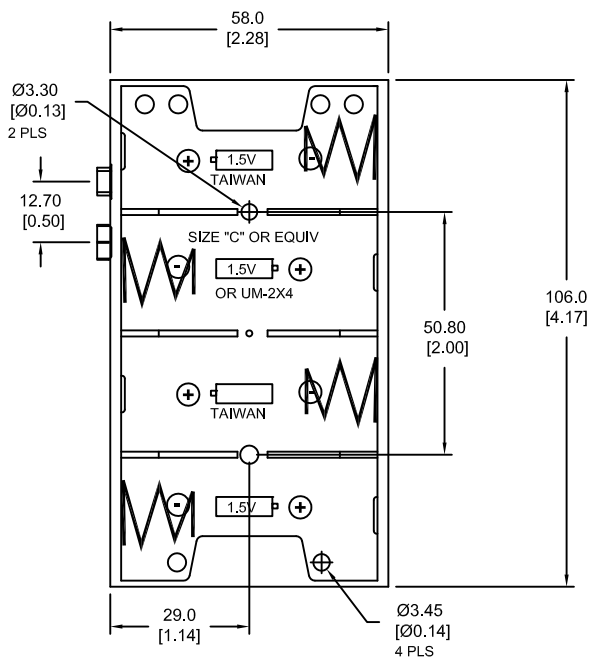

NOTES:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB,
 UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: SPRING STEEL, NICKEL PLATED.
 9 VOLT SNAPS: BRASS, NICKEL PLATED.
 CONTACT RESISTANCE: UNDER 50mΩ FOR
 +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.020 (.5)		Scale XX	Drawn By B.S. Approved By T.B.
Fractional ± .030 (.8)	Title EIGHT "C" CELL HOLDER WITH SNAP FASTENERS		
Angular ± 3°	Date 4/29/17	Drawing Number BH48CSF	