


NOTES:

1. MATERIALS AND FINISHES  
 BODY - BRASS, NICKEL PLATING  
 CONTACT - BERYLLIUM COPPER, GOLD PLATING  
 INSULATOR - DELRIN, NATURAL
2. ELECTRICAL:  
 A. IMPEDANCE: 75 OHM  
 C. FREQUENCY RANGE: DC 0-4 GHz  
 C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:  
 A. DURABILITY: 500 CYCLES MIN.  
 B. TEMPERATURE RANGE: - 40°C to +85°C

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	ADDED AN USER \TONY. T	22-Jul-98		
B1	ADDED AN USER (AEAL)\N/A	11-Jun-99		
B2	STAMP WERE CHANGED\N/A	30-May-03		
C	SEE SHEET 1	20-Sep-04		
D	SEE SHEET 1	27-Jun-08		SH
E	SEE SHEET 1	21-Dec-09	47888	LSM

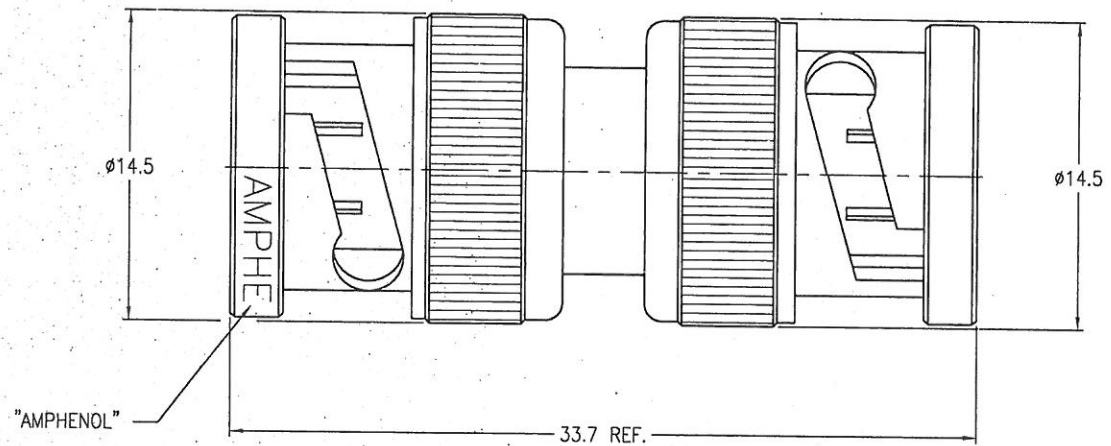

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ±0.05mm    0.5 - 6mm ±0.1mm    6 - 30mm ±0.2mm    30 - 120mm ±0.3mm    ANGLES ±1°	MATERIAL	DRAWN T.DENG	DATE 21-Dec-09	TITLE BNC MALE TO BNC MALE ADAPTOR			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
	REFERENCE	ENGINEER C.WANG	DATE 21-Dec-09	SCALE: 3/1    SHEET 2 OF 2			DRAWING NO. 31-218-75-ND3G	
	FINISH	APPROVED S.HSIEH	DATE 21-Dec-09	DWG SIZE B	CODE ID 74868	REV E	ITEM NO. 012071AAB0ND7F	
	CAD FILE F:\DWG\APL\CNPD\RF\31\218\75\ND3G-ESZ						PART NO. 31-218-75RFX	

RD-OR 31943 page 2