


TIMING DIAGRAM

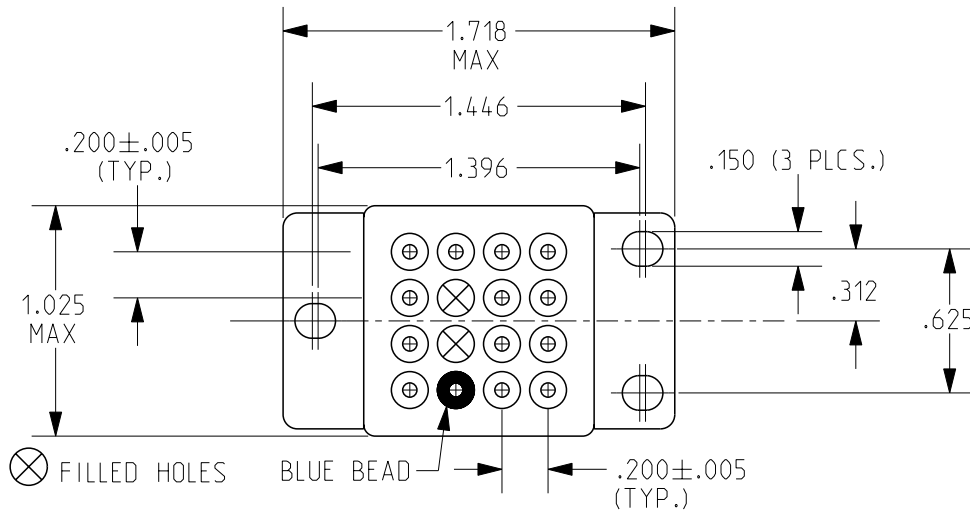

REV. A
DCO 301671


TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 OPERATING CURRENT _____ 150 mA max.
 INPUT VOLTAGE _____ 20-30 VDC
 CONTROL VOLTAGE _____ 20-30 VDC
 CONTROL CURRENT _____ 15 mA max.

ENVIRONMENT:
 VIBRATION _____ 10 _____ Hz TO _____ 3000 _____ Hz @ _____ 30 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -55 _____ °C TO _____ +125 _____ °C

NOTES: _____

CUSTOMER DATA SHEET

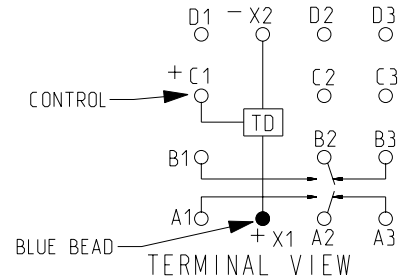

CONTACT RATING: _____ LOW LEVEL
 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
 100,000 OPERATIONS

DR. R.F. 1/20/2015 CK. J.M.B. 1/20/2015



CUST. _____ QPL
 CUST. NO. M83726/29-5003P REV. ----

TE NUMBER
 6-1617813-3

TD229-5003P