

## DTCxxxxCA-HF Series

**RoHS Device**  
**Halogen Free**





### Features

- Epitaxial planar die construction.
- Built-in biasing resistors,  $R_1 \neq R_2$ .

### Mechanical data

- Case: SOT-23, molded plastic.

### Circuit Diagram

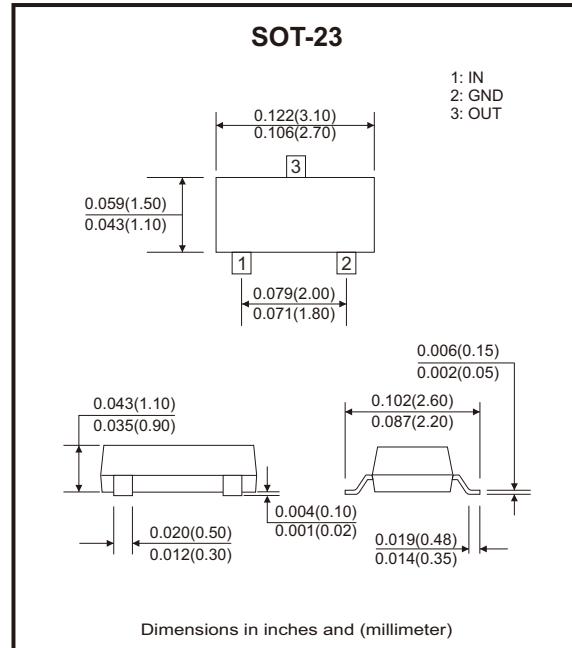

### Maximum Ratings (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units
Supply voltage	$V_{CC}$	50	V
Input voltage	$V_{IN}$	-5 to +10	
		-10 to +30	
		-6 to +40	
		-5 to +12	
		-5 to +12	
		-7 to +20	
Output current	$I_O$	-5 to +30	
		100	
		100	
		70	
		100	
		100	
		100	
Output current	$I_C$ (Max.)	100	mA
Power dissipation	$P_D$	200	mW
Thermal resistance, junction to ambient air	$R_{\theta JA}$	625	°C/W
Operating and storage and temperature range	$T_J, T_{STG}$	-55 to +150	°C

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

# Digital Transistor

**Comchip**  
SMD Diode Specialist

## Electrical Characteristics (at $T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test conditions	Min	Typ	Max	Units
Input voltage	$V_{I(\text{off})}$	$V_{CC} = 5V, I_o = 100\mu\text{A}$	0.3			V
			0.8			
			0.3			
			0.5			
			0.3			
			0.3		0.5	
Input voltage	$V_{I(\text{on})}$	$V_o = 0.3V, I_o = 20\text{mA}$ $V_o = 0.3V, I_o = 2\text{mA}$ $V_o = 0.3V, I_o = 1\text{mA}$ $V_o = 0.3V, I_o = 5\text{mA}$ $V_o = 0.3V, I_o = 20\text{mA}$ $V_o = 0.3V, I_o = 20\text{mA}$ $V_o = 0.3V, I_o = 5\text{mA}$			3.0	V
					3.0	
					1.4	
					1.1	
					3.0	
					2.5	
Output voltage	$V_{O(\text{on})}$	$I_o / I_i = 5\text{mA} / 0.25\text{mA}$		0.1	0.3	V
			$I_o / I_i = 10\text{mA} / 0.5\text{mA}$			
Input current	$I_i$	$V_i = 5V$			7.2	mA
					0.88	
					0.88	
					3.6	
					3.8	
					1.8	
Output current	$I_{O(\text{off})}$	$V_{CC} = 50V, V_i = 0V$			1.8	$\mu\text{A}$
					0.5	
DC current gain	$G_I$	$V_o = 5V, I_o = 10\text{mA}$	33			
			24			
			68			
			80			
			33			
			30			
Input resistor	$R_1(R_2)$		80			$\text{k}\Omega$
			0.7	1(10)	1.3	
			7	10(4.7)	13	
			7	10(47)	13	
			1.54	2.2(47)	2.86	
			1.54	2.2(10)	2.86	
Input resistor ( $R_1$ ) tolerance	$\Delta R_1$		3.29	4.7(10)	6.11	
			3.29	4.7(47)	6.11	
Resistance ratio tolerance	$\Delta R_2/R_1$		-20		+20	%
Gain-bandwidth product	$f_T$	$V_{CE} = 10V, I_E = 5\text{mA}, f = 100\text{MHz}$		250		MHz

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

# Digital Transistor

## Rating and Characteristic Curves (DTCxxxxCA-HF Series)

Fig.1 - Derating Curve

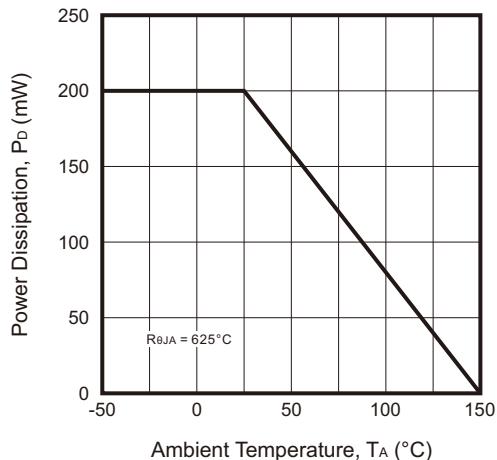


Fig.2 - V<sub>CE(SAT)</sub> vs. I<sub>c</sub>

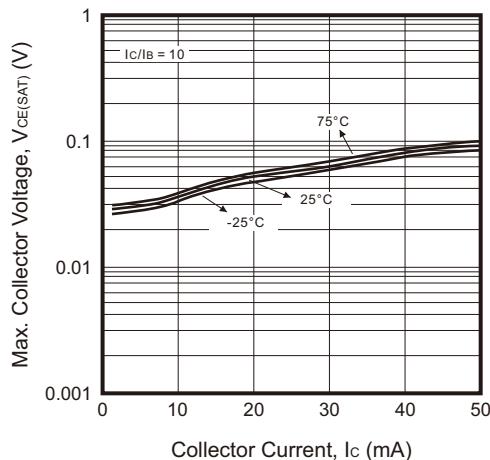


Fig.3 - DC Current Gain

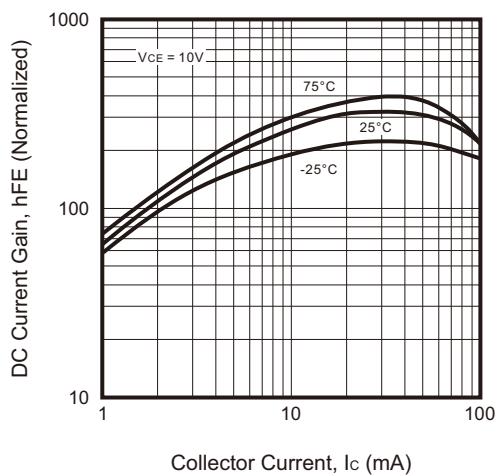


Fig.4 - Output Capacitance

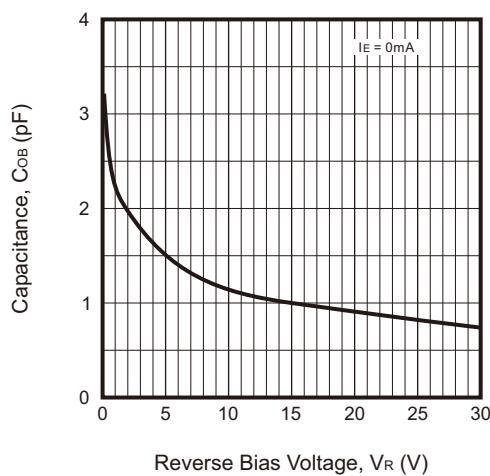


Fig.5 - Collector Current vs. Input Voltage


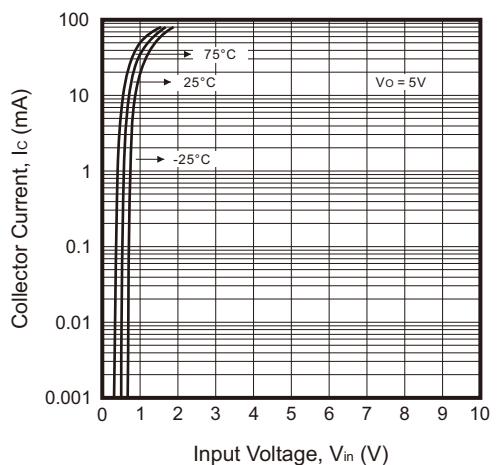



Fig.6 - Input Voltage vs. Collector Current

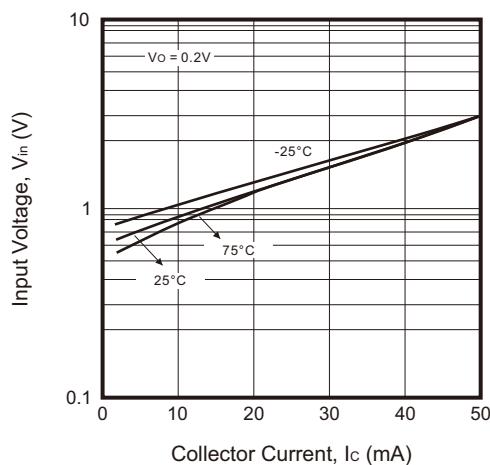

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

## Reel Taping Specification

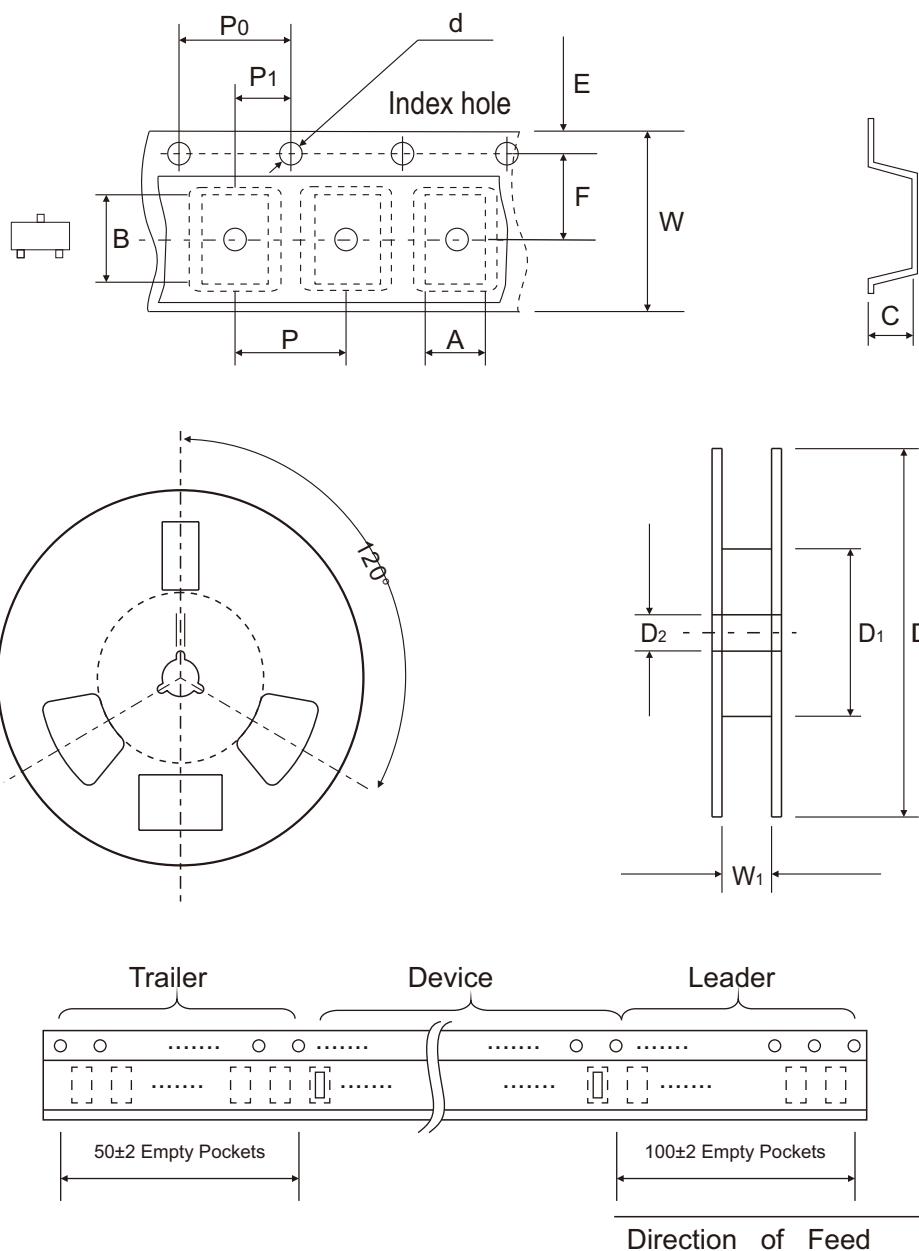

	SYMBOL	A	B	C	d	D	D <sub>1</sub>	D <sub>2</sub>
SOT-23	(mm)	$3.15 \pm 0.10$	$2.77 \pm 0.10$	$1.22 \pm 0.10$	$1.50 \pm 0.10$	$178.00 \pm 1.00$	$54.00 \pm 0.50$	$13.00 \pm 0.50$
	(inch)	$0.124 \pm 0.004$	$0.109 \pm 0.004$	$0.048 \pm 0.004$	$0.059 \pm 0.004$	$7.008 \pm 0.039$	$2.126 \pm 0.020$	$0.512 \pm 0.020$


	SYMBOL	E	F	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>1</sub>
SOT-23	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.05$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.05$	$8.00 \pm 0.30$ $-0.10$	$9.50 \pm 1.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.002$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.002$	$0.315 \pm 0.012$ $-0.004$	$0.374 \pm 0.039$

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

## Marking Code


Part Number	Marking Code
DTC113ZCA-HF	E21
DTC114WCA-HF	84
DTC114YCA-HF	64
DTC123JCA-HF	E42
DTC123YCA-HF	62
DTC143XCA-HF	43•
DTC143ZCA-HF	E23

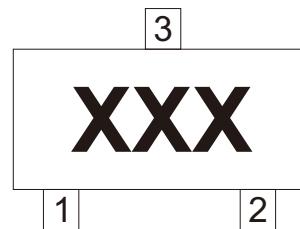

xx/xxx = Product type marking code

## Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

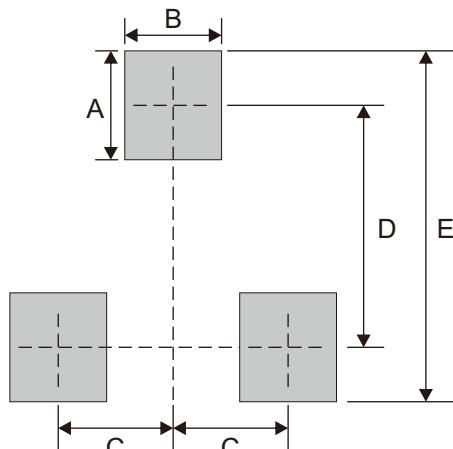

Note: 1. The pad layout is for reference purposes only.

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7

Company reserves the right to improve product design , functions and reliability without notice.