

AR16148CHSCT



Sample image

Order symbol: AR16148CHSCT

Product nbr: 8561074

Description: PC Enclosure


Remarks: Hinged transparent screw cover

EAN: 6418074066640

El. number:

- Finland:
- Denmark:
- Sweden:

Including: Hinged screw cover. Base with 10-32 brass inserts, cover with formed in place PUR gasket, stainless hinge pin and 2 cover screws. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

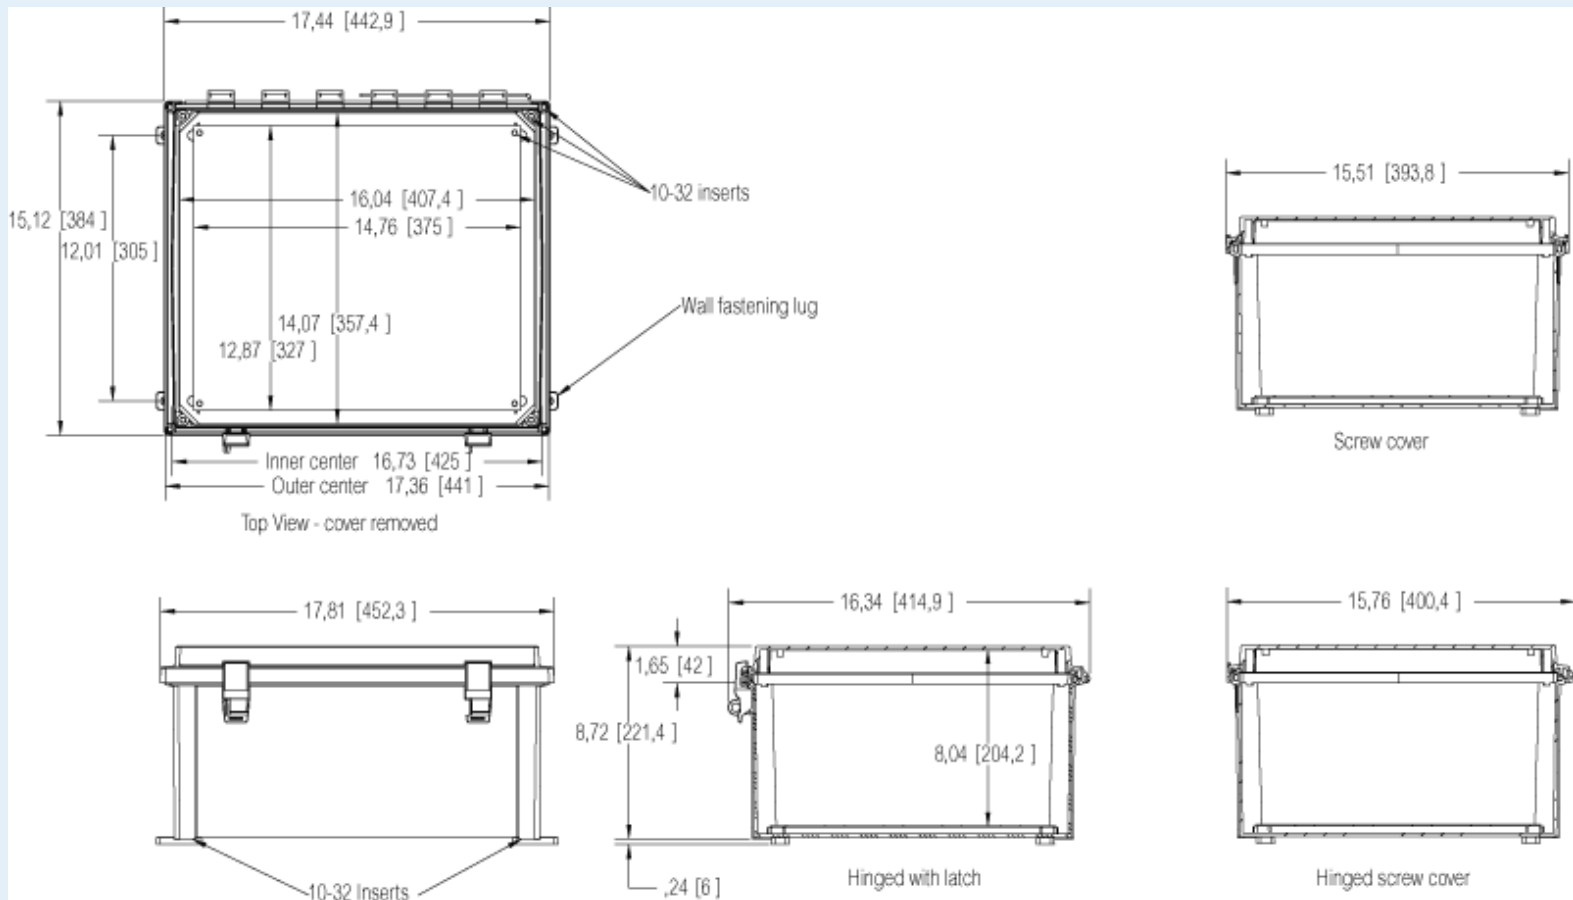

Dimensions:

Height

Width

Depth

Accessories:

| | | | |
|-------|-----|-----|-----|
| mm: | 406 | 356 | 203 |
| inch: | 16 | 14 | 8 |

Materials:

| | |
|------------------|----------------------|
| Material: | Polycarbonate |
| Base colour: | RAL 7035 -light grey |
| Cover colour: | Transparent |
| Gasket material: | Polyurethane |

Temperatures:

| | |
|-------------------------------|-------------|
| Temperature °C (short term):: | -40 ... 140 |
| Temperature °C (continuous): | -40 ... 80 |
| Temperature °F (short term): | -40 ... 250 |
| Temperature °F (continuous): | -40 ... 175 |

| | |
|----------|---|
| ALBP1614 | Aluminum Back Panel (375 x 327) |
| ASPHK16 | Swing Panel Kit w/o Panel |
| ADFP1614 | Dead Front Panel w/ screws (362 x 415 x 0) |
| APBP1614 | PVC Back Panel (375 x 327) |
| ABP1614 | Painted Steel Back Panel (375 x 327) |
| AMFL14 | 14" Mounting Flange Set |
| ASPK1614 | Swing Panel Kit incl. Panel |

Rating:

| | |
|--|-----------------------|
| Ingress protection (EN 60529): | IP66; IP67; |
| Impact Resistance (EN 62262): | IK09; |
| Electrical insulation: | Not insulated |
| Halogen free (DIN/VDE 0472, Part 815): | 1 |
| UV resistance: | UL 508 |
| Flammability Rating: | UL 508 |
| Glow Wire Test (IEC 695-2-1) °C: | 960 °C |
| NEMA Class | NEMA 4, 4X, 12 and 13 |

Certificates:

ARCA_CertificateofCompliance