
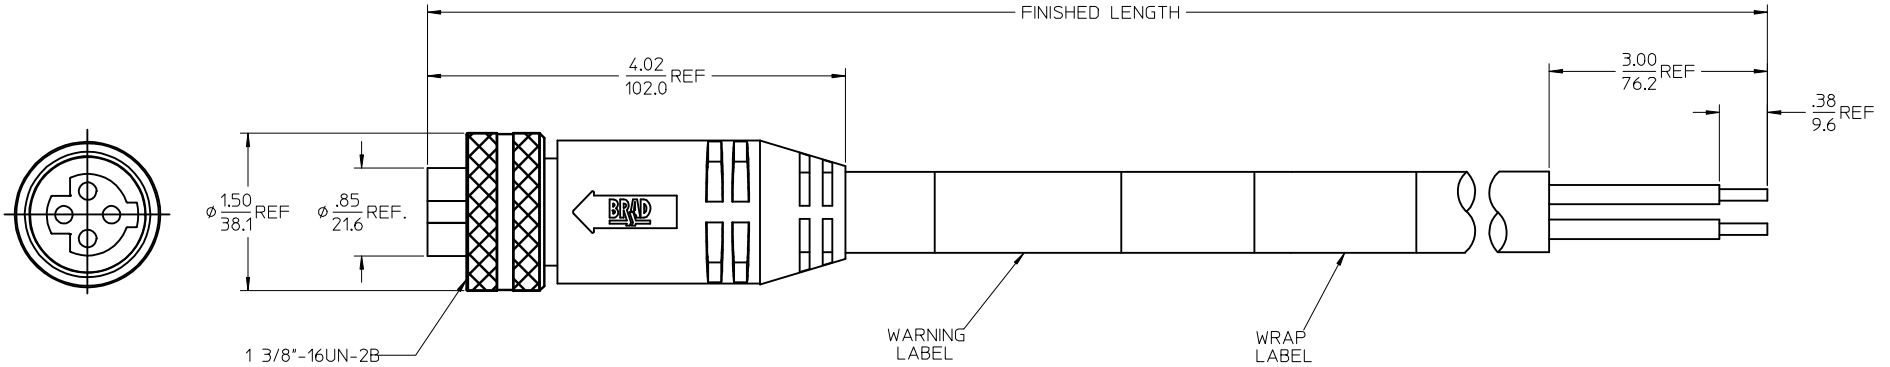


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630056	C03100A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630181	C04100A48M020	32	2M +89-0MM (6'7"+3.50-0)

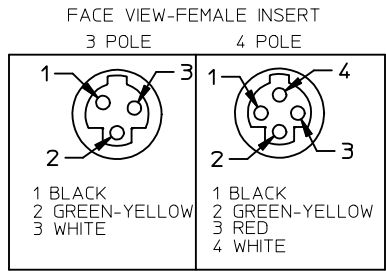

SPECS:  
 OVERMOLD: GRAY PVC  
 INSERT: BLACK PVC  
 COUPLING NUT: ANODIZED ALUMINUM  
 CABLE: #10AWG GRAY PVC  
 DUAL RATED UL TC/OPEN WIRING & STOOW  
 ELECTRICAL: 600V AC/DC

<b>UPDATED PROFILE</b> EC NO: IPG2014-1160 DRWNG:GUSTAFSON 2014/05/09 CHKD:VOU 2014/05/30 APPR:WOODMAN 2014/05/12	QUALITY SYMBOLS  	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>IN/MM</b>	SCALE <b>1:1</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2°	mm INCH DRAWN BY DATE B. RUPERT 01/12/10 CHECKED BY DATE B. WOODMAN 01/12/10 APPROVED BY DATE JFMURPHY 2010/01/15	TITLE <b>QUICK CHANGE FEMALE STRAIGHT ALT KEY 3 &amp; 4 POLE AS PORTABLES</b>		<b>MOLEX INCORPORATED</b>	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					