

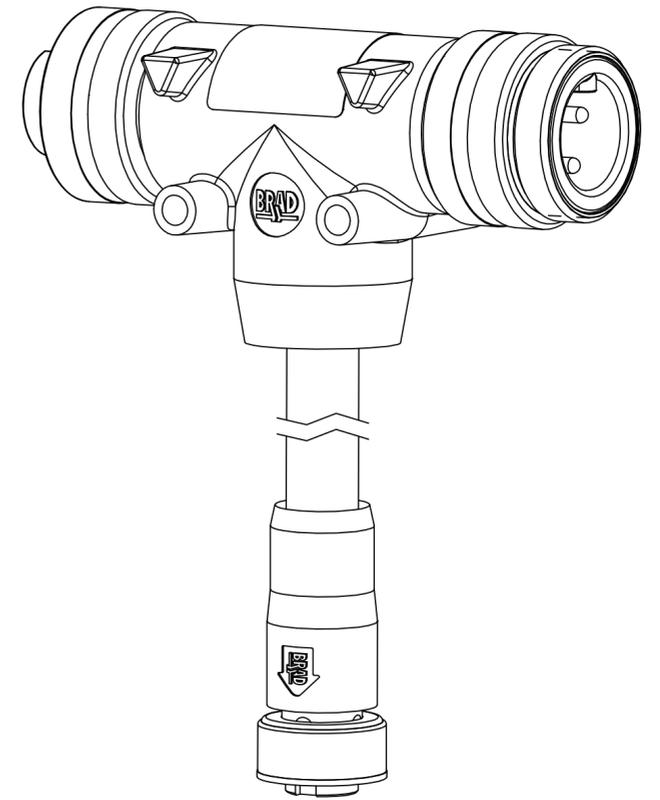
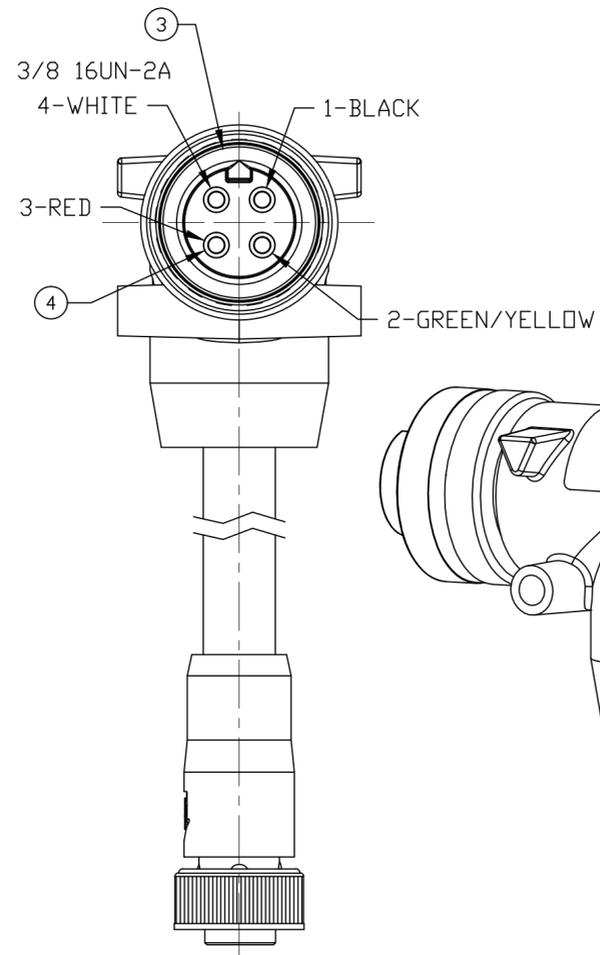
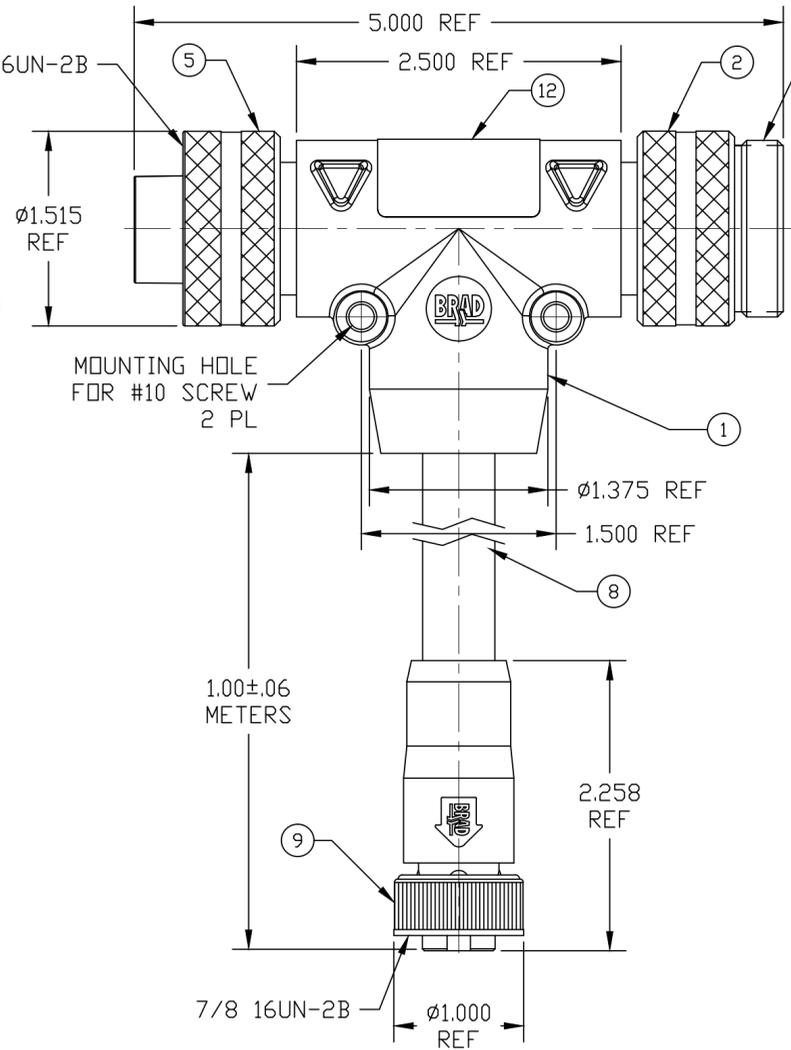
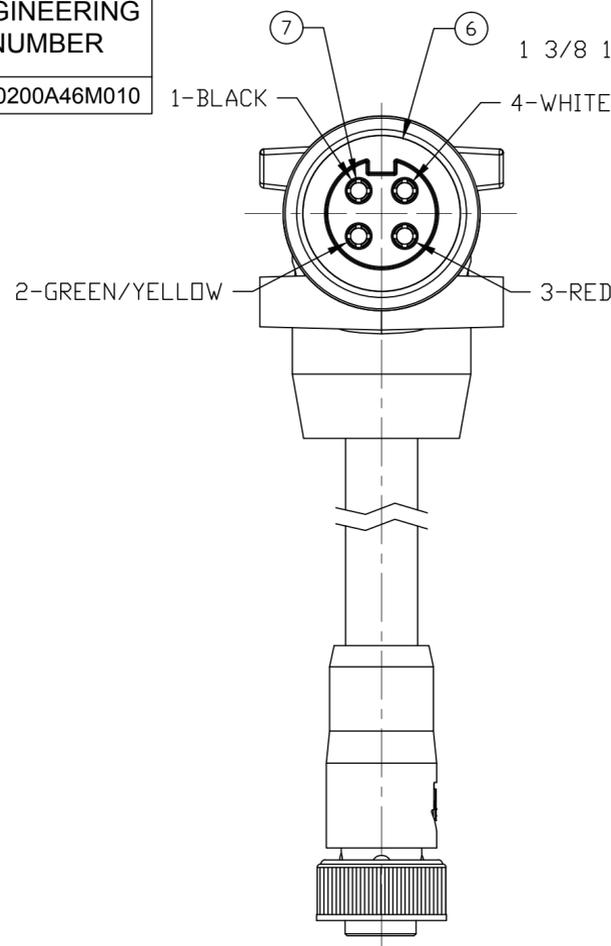


PART NUMBER	ENGINEERING NUMBER
1300680075	TC40200A46M010

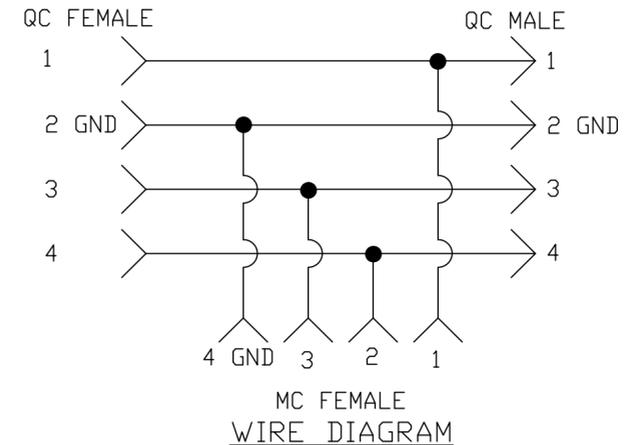

- NOTES:**
- MATERIAL: AS NOTED
  - FINISH: AS NOTED
  - ELECTRICAL:  
VOLTAGE: 480V PER IEC60664  
600V PER UL2237  
MAX THRU CURRENT: 32A  
MAX DROP CURRENT: 15A (B)
  - TEMP RATING: -20° TO +90°C
  - PROTECTION: IP67 (WHEN MATED)
  - CERTIFICATION:  
UL LISTED/CSA CERTIFIED FILE NO: E258922

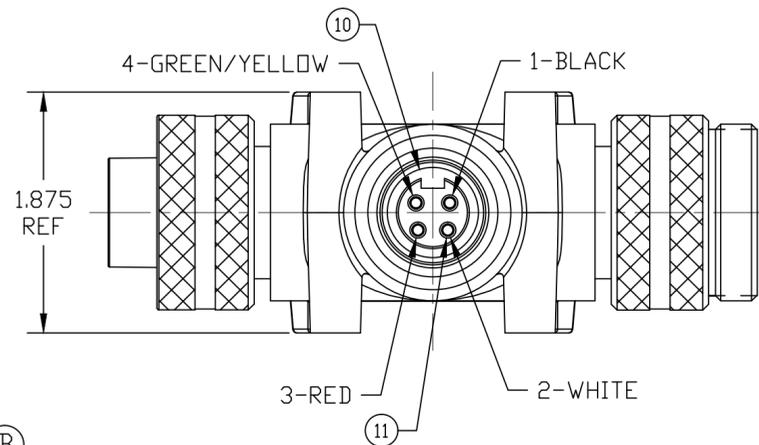

ITEM	DESCRIPTION	MATERIAL	FINISH
12	LABEL	POLYESTER	BLACK/DRANGE
11	MC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
10	MC FEMALE INSERT	PVC	BLACK
9	MC COUPLING NUT	ZINC ALLOY	BLACK E-COAT
8	CABLE, 14AWG-3 TYPE TC-ER, STDDW	PVC	GRAY
7	QC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	QC FEMALE INSERT	PVC	BLACK
5	QC FEMALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	QC MALE INSERT	PVC	BLACK
2	QC MALE COUPLING NUT	ALUMINUM	CLEAR ANODIZE
1	OVERMOLD	PVC	GRAY

REV D	REV	DESCRIPTION
B		

REVD NOTE 3	EC NO: IPG2017-0829	3/3/17
DRWN: RSTONE	2017/03/10	
CHKD: K COX		
APPR: BWOODMAN	2010/01/20	

QUALITY SYMBOL	▽=0
	∇=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	±--- ±---
3 PLACES	±--- ±---
2 PLACES	±--- ±---
1 PLACE	±--- ±---
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE		INCH
DRAWN BY	DATE	TITLE
KJOZWIK	2010/01/18	BRAD POWER QC 4 POLE TEE W/4 POLE MC CBL DROP
CHECKED BY	DATE	
BWOODMAN	2010/01/18	
APPROVED BY	DATE	
JFMURPHY	2010/01/20	
MATERIAL NO.	SEE TABLE	
SIZE	C	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
---	INCH	
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-130068-016	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		