


VIEWS SHOWN PRE-TERMINATED

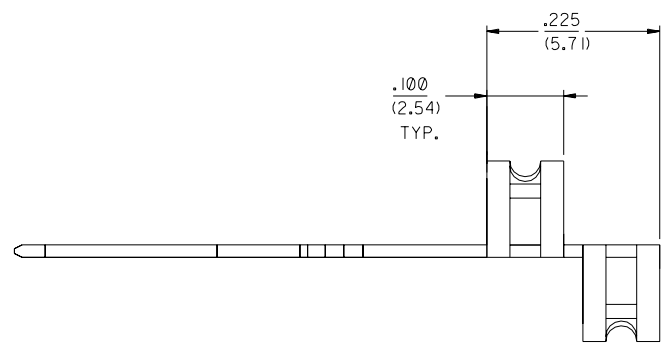

- NOTES:
1. MATERIAL: COPPER ALLOY.
 2. PLATING - CONTACT AREA:
30 MICROINCHES/(0.76 MICROMETERS) MINIMUM GOLD OVER NICKEL UNDERPLATE OVERALL.
OR
GOLD FLASH OVER 40 MICROINCHES/(1.00 MICROMETERS) MINIMUM PALLADIUM-NICKEL OVER NICKEL UNDERPLATE OVERALL.
 3. PLATING -COAX BRAID AREA :
150 MICROINCHES/(3.81 MICROMETERS) MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL.
 4. PARTS ARE SHIPPED ON REELS:
QUANTITY TO BE 4,000 PARTS PER REEL
 5. REFER TO PS-71754-9999 FOR ASSEMBLY AND TERMINATION DETAILS.
 6. "X" IN STATUS COLUMN REFLECTS NOT TOOLED
- NOTE FOR LEAD FREE CONVERSION:
THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO ROHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

ITEM PART NUMBERS AND PLATING

STATUS		
A	71198-1001	30 MICROINCHES/(0.76 MICROMETERS) MINIMUM GOLD OVER NICKEL UNDERPLATE OVERALL IN CONTACT AREA 150 MICROINCHES MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL IN COAX BRAID AREA.
X	71198-1002	GOLD FLASH OVER 40 MICROINCHES/(1.00 MICROMETERS) MINIMUM PALLADIUM-NICKEL OVER NICKEL UNDERPLATE OVERALL IN CONTACT AREA, 150 MICROINCHES MINIMUM TIN OVER NICKEL UNDERPLATE OVERALL IN COAX BRAID AREA.

C	LEADFREE ECN# UCF2004-0285 DMORGAN 04/04/23
B	REVISED PEG HOLE PER ECN# U70490 SCARTH 97/03/07
A	RELEASE DRAWING ECR U70012 96/07/17 MURPHY

DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		REVISIONS	
3 PLACE	± .010	INCH	METRIC		
2 PLACE	±	± 0.25			
1 PLACE	---	±			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MFG, SH, REV, LTR.	
DRWG. BY: MOS		CHK'D BY: PAM		TITLE: GROUND PLANE FOR EVC CABLE ASSEMBLIES SALES DETAIL	
APP'D BY: JWN		SCALE: 8:1		MOLEX INCORPORATED U.S.A. SHEET NO. 1 OF 1 DATE 12/13/95	
PART NO. SEE CHART		DRWG. NO. SD-71198-100*		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	