



# Cable Clamps, Self-Aligning

## Features

- Secures the Routing of Cables, Harnesses, and Hoses
- Rounded Edges Protect Against Insulation Abrasion and Cutting Hoses
- Saddle Washer Allows for Quick and Secure Alignment
- Manufactured from Durable and Flexible Nylon 66
- Available in Natural or UV Black

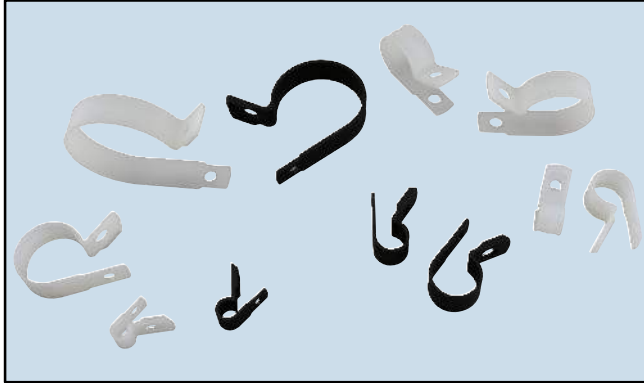

## CC-04

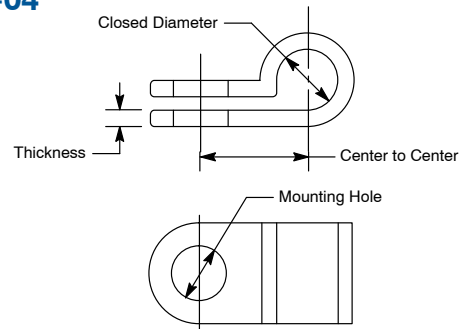

## Color Code Chart

|   |       |   |         |
|---|-------|---|---------|
| 0 | Black | 9 | Natural |
|---|-------|---|---------|

## Cable Clamps (100 per bag)

| NTE Type No. | Screw Size | Width (in. / mm) | Thickness (in. / mm) | Closed Diameter (in. / mm) | Center to Center (in. / mm) | Overall Length (in. / mm) | Diag No. |
|--------------|------------|------------------|----------------------|----------------------------|-----------------------------|---------------------------|----------|
| 04-SACL125x  | #6         | .377 / 9.57      | .046 / 1.16          | .082 / 2.08                | .314 / 7.97                 | .800 / 20.32              | CC-04    |
| 04-SACL187x  | #6         | .377 / 9.57      | .049 / 1.24          | .151 / 3.83                | .362 / 9.19                 | .867 / 22.02              | CC-04    |
| 04-SACL250x  | #6         | .396 / 10.05     | .049 / 1.24          | .205 / 5.20                | .409 / 10.38                | .900 / 22.86              | CC-04    |
| 04-SACL312x  | #6         | .396 / 10.05     | .049 / 1.24          | .256 / 6.50                | .440 / 11.17                | .982 / 24.94              | CC-04    |
| 04-SACL375x  | #10        | .486 / 12.34     | .057 / 1.44          | .352 / 8.94                | .492 / 12.49                | 1.117 / 28.37             | CC-04    |
| 04-SACL500x  | #10        | .486 / 12.34     | .057 / 1.44          | .470 / 11.93               | .582 / 14.78                | 1.233 / 31.31             | CC-04    |
| 04-SACL625x  | #10        | .486 / 12.34     | .060 / 1.52          | .564 / 14.32               | .622 / 15.79                | 1.335 / 33.90             | CC-04    |
| 04-SACL750x  | #10        | .469 / 11.91     | .060 / 1.52          | .693 / 17.60               | .708 / 17.98                | 1.460 / 37.08             | CC-04    |
| 04-SACL875x  | #10        | .469 / 11.91     | .057 / 1.44          | .813 / 20.65               | .767 / 19.48                | 1.577 / 40.05             | CC-04    |
| 04-SACL1000x | #10        | .469 / 11.91     | .057 / 1.44          | .890 / 22.60               | .820 / 20.82                | 1.684 / 42.77             | CC-04    |
| 04-SACL1250x | #10        | .469 / 11.91     | .065 / 1.65          | 1.126 / 28.60              | .940 / 23.87                | 2.000 / 50.80             | CC-04    |
| 04-SACL1500x | #10        | .486 / 12.34     | .060 / 1.52          | 1.440 / 36.57              | .980 / 24.89                | 2.168 / 55.06             | CC-04    |

Note 1. Replace "x" in device number with corresponding color code from the "Color Code Chart".