


DESCRIPTION: 9 POS MICRO-D FEMALE (ASSEMBLED) TO BLUNT CUT

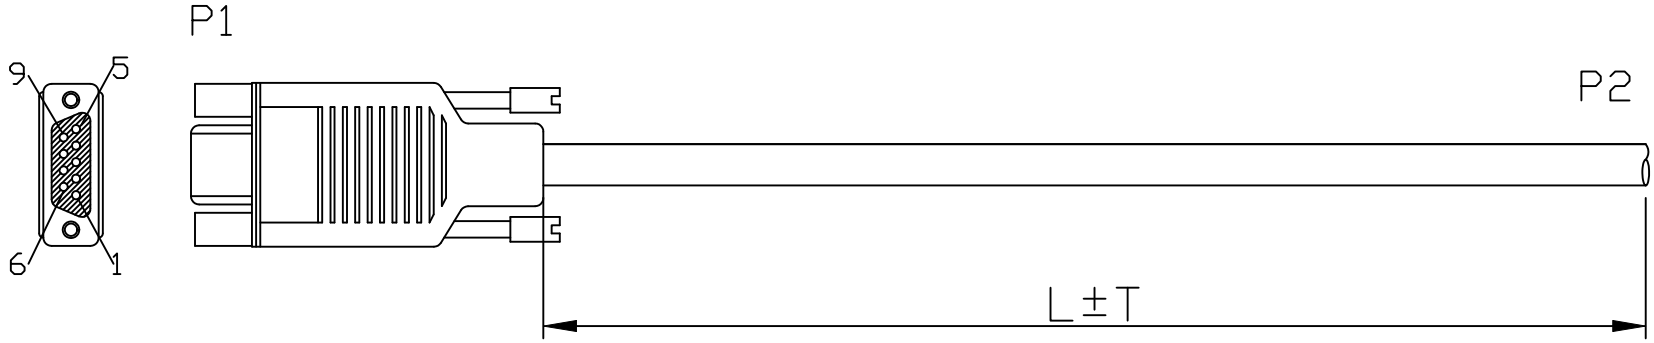

1. P1. CONNECTOR: NORCOMP MICRO D 9S, ASSEMBLED HOOD W/THUMBSCREWS
2. P2. BLUNT CUT END
3. WIRE: 28AWG [7X36] x9C +ALUMINUM FOIL W/ BRAID 65%, UL2464+CSA, COLOR BLACK
4. PINOUT:

P1		P2
1	_____	BLACK
2	_____	BROWN
3	_____	RED
4	_____	ORANGE
5	_____	YELLOW
6	_____	GREEN
7	_____	BLUE
8	_____	VIOLET
9	_____	GRAY
SHELL	_____	DRAIN

CCA-009-YYYYR152

I = INCHES ———— |
 F = FEET |
 M = METERS | LENGTH

EXAMPLES:
 CCA-009-I18R152 = 18 INCHES
 CCA-009-F03R152 = 3 FEET
 CCA-009-M01R152 = 1 METER

PACKAGED: 1 PER BAG

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: P. JENKINS	DATE: 01-18-12
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: NTS	SHEET OF 1 1	REV 0
		DWG NO. CCA-009-YYYYR152		