


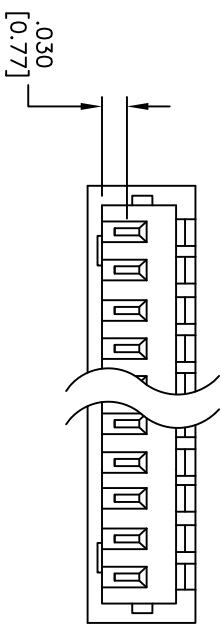



APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REVISED SPEC.	6/7/12	

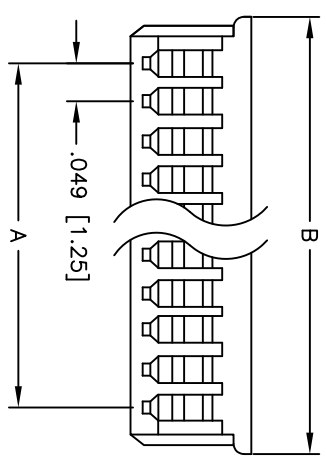

NOTE: 1 LOCK ON 2 & 3 POSITION

Positions: 2 thru 15  
 A = .049 [1.25] x No. of Positions-1  
 B = .049 [1.25] x No. of Positions + .068 [1.75]

**SPECIFICATIONS:**  
 Material:  
 Insulator: PBT, rated UL 94V-0  
 Insulator color: White  
 Electrical:  
 Operating voltage: 125 VAC max  
 Current rating: 1 Amp max  
 Insulation resistance: 100 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	MM
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049" [1.25mm] CRIMP HOUSING  
 LOW PROFILE, DUAL POLARIZED

SIZE	PART NO.	REV.
X	125CH-A-XX	A
REF:	SCALE: NTS	SHEET 1 OF 1